


LED LINEAR LIGHT
LLS-COVE-W40



- Ceiling slot preferred
- Rotatable regulating bracket
- Embedded installation, seamless stitching
- Multiple control options, DMX,0-10V TRIAC/ELV dimming, DALI, steady on, etc



Physical&Installation Dimensions

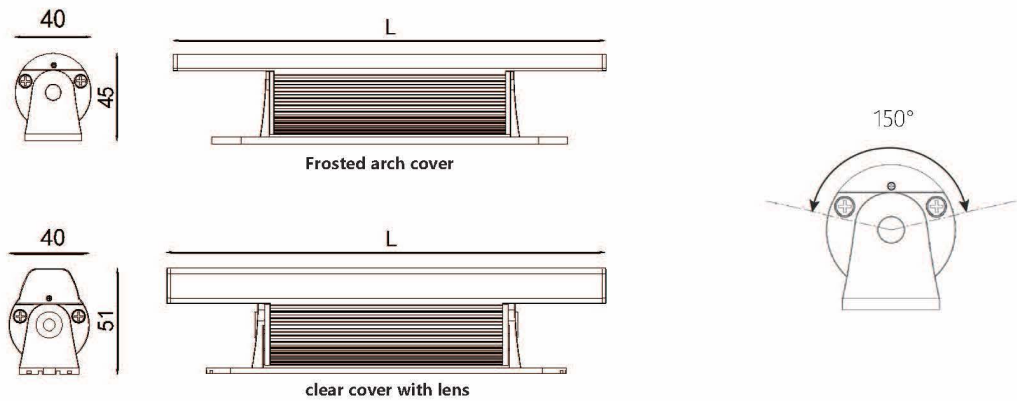

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LLS-COVE-W40-L3	L300mm	8W	2700K/3000K 4000K/5700K	450lm 500lm	15° /25° /35° 20x40° /120°		EPISTAR	0.5±5%Kg 8 Units/Ctn 75*30*37CM
			R+G+B RGBW	200lm 300lm				
LLS-COVE-W40-L6	L600mm	15W	2700K/3000K 4000K/5700K	750lm 800lm			OSRAM CREE 	1.0±5%Kg 4 Units/Ctn 65*30*37CM
			R+G+B RGBW	450lm 550lm				
LLS-COVE-W40-L12	L1200mm	30W	2700K/3000K 4000K/5700K	1350lm 1600lm			San'an BRIDGELUX LUMILEDS 	1.6±5%Kg 4 Units/Ctn 70*30*37CM
			R+G+B RGBW	470lm 1211lm				

