

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1744.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	84.2V x 69.2H
	At 50% of Imax	44.8V x 30.6H
	At 90% of Imax	15.6V x 10.9H
Beam Flux	Total	999.7 lumens per klm.
	To 10% of Imax	818.3 lumens per klm.
	To 50% of Imax	391.0 lumens per klm.
	To 90% of Imax	57.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.3V I:0.0426A P:8.693W PF:0.9212 Lamp Flux:531.729x1 lm		
NAME: 8.02.003.0424 20x40°LLS-COVE2-W40-8W-277V-016	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

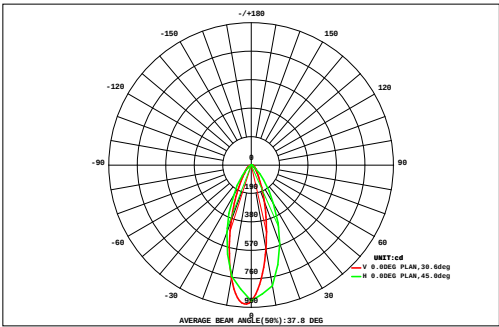

DATA OF LAMP		Eff:61.16lm/W	
MODEL	COVE2-W40-8W-277V-016	Imax(cd)	927.7
NOMINAL POWER(W)	9	AVAILABILITY(%)	82.4
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	437.9
NOMINAL FLUX(lm)	531.729	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	531.7
TEST VOLTAGE(V)	221.3	θ @50%(H,V)	31,45DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.02	0.05	0.07	0.13	0.18	0.18	0.16	0.11	0.12	0.17	0.19	0.18	0.10	0.06	0.04	0.02	0.01	1.81	0.00		
	64	0.02	0.04	0.08	0.14	0.23	0.29	0.32	0.31	0.31	0.31	0.31	0.30	0.25	0.17	0.09	0.05	0.03	0.02	3.26	0.00		
	56	0.03	0.06	0.13	0.25	0.39	0.50	0.59	0.65	0.69	0.67	0.60	0.52	0.42	0.30	0.17	0.09	0.05	0.02	6.12	0.00		
	48	0.04	0.10	0.21	0.39	0.60	0.82	1.12	1.45	1.65	1.55	1.25	0.92	0.66	0.48	0.28	0.14	0.07	0.03	11.7	2.63		
	40	0.05	0.13	0.30	0.54	0.83	1.28	2.01	2.93	3.52	3.26	2.40	1.57	1.00	0.67	0.41	0.21	0.09	0.04	21.2	14.3		
	32	0.06	0.17	0.37	0.65	1.05	1.85	3.27	5.19	6.53	5.95	4.10	2.42	1.37	0.84	0.52	0.27	0.12	0.05	34.8	29.2		
	24	0.07	0.20	0.42	0.74	1.31	2.53	4.89	8.34	10.8	9.68	6.30	3.43	1.75	0.97	0.59	0.32	0.14	0.05	52.6	47.6		
		0.08	0.22	0.46	0.80	1.49	3.09	6.27	11.1	14.8	13.2	8.30	4.29	2.09	1.08	0.64	0.36	0.16	0.06	68.5	63.8		
		0.08	0.23	0.47	0.84	1.61	3.42	7.14	12.8	17.3	15.3	9.43	4.78	2.27	1.14	0.66	0.37	0.17	0.06	78.1	73.6		
		0.09	0.23	0.47	0.84	1.61	3.40	7.11	12.8	17.2	15.0	9.24	4.71	2.23	1.12	0.66	0.37	0.17	0.06	77.3	72.7		
		0.08	0.21	0.45	0.79	1.44	2.95	5.95	10.4	13.8	12.3	7.78	4.05	2.00	1.05	0.63	0.35	0.16	0.06	64.5	59.8		
	-24	0.07	0.19	0.40	0.71	1.21	2.29	4.31	7.25	9.28	8.29	5.45	3.01	1.59	0.90	0.56	0.31	0.13	0.05	46.0	40.9		
-32	0.05	0.16	0.34	0.61	0.97	1.64	2.83	4.44	5.51	5.01	3.47	2.08	1.21	0.76	0.48	0.25	0.11	0.04	30.0	24.1			
-40	0.04	0.12	0.26	0.48	0.73	1.08	1.63	2.29	2.70	2.52	1.90	1.29	0.86	0.60	0.38	0.19	0.08	0.03	17.2	9.41			
-48	0.03	0.08	0.17	0.34	0.52	0.68	0.86	1.03	1.10	1.05	0.90	0.72	0.56	0.43	0.25	0.12	0.06	0.03	8.93	0.00			
-56	0.02	0.05	0.10	0.19	0.33	0.41	0.43	0.43	0.42	0.40	0.39	0.37	0.33	0.25	0.13	0.07	0.04	0.02	4.37	0.00			
-64	0.01	0.03	0.06	0.11	0.19	0.25	0.27	0.25	0.23	0.22	0.22	0.22	0.20	0.13	0.07	0.04	0.02	0.01	2.54	0.00			
-72	0.01	0.02	0.04	0.06	0.10	0.16	0.15	0.11	0.06	0.05	0.08	0.11	0.12	0.07	0.04	0.02	0.02	0.01	1.22	0.00			
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72			
Φ t	0.82	2.26	4.77	8.54	14.7	26.8	49.3	82.0	106	94.8	62.3	35.0	19.1	11.1	6.65	3.58	1.64	0.64	530	---			
Φ a	0.00	0.00	0.00	0.00	4.38	20.3	44.1	78.1	103	91.2	57.8	29.1	10.5	0.00	0.00	0.00	0.00	0.00	---	438			


one-half-peak spread: U:21.1,D:24.1 , L:15.0,Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.3V I:0.0426A P:8.693W PF:0.9212 Lamp Flux:531.729x1 lm		
NAME: 8.02.003.0424 20x40°LLS-COVE2-W40-8W-277V-010PE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:20240700018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

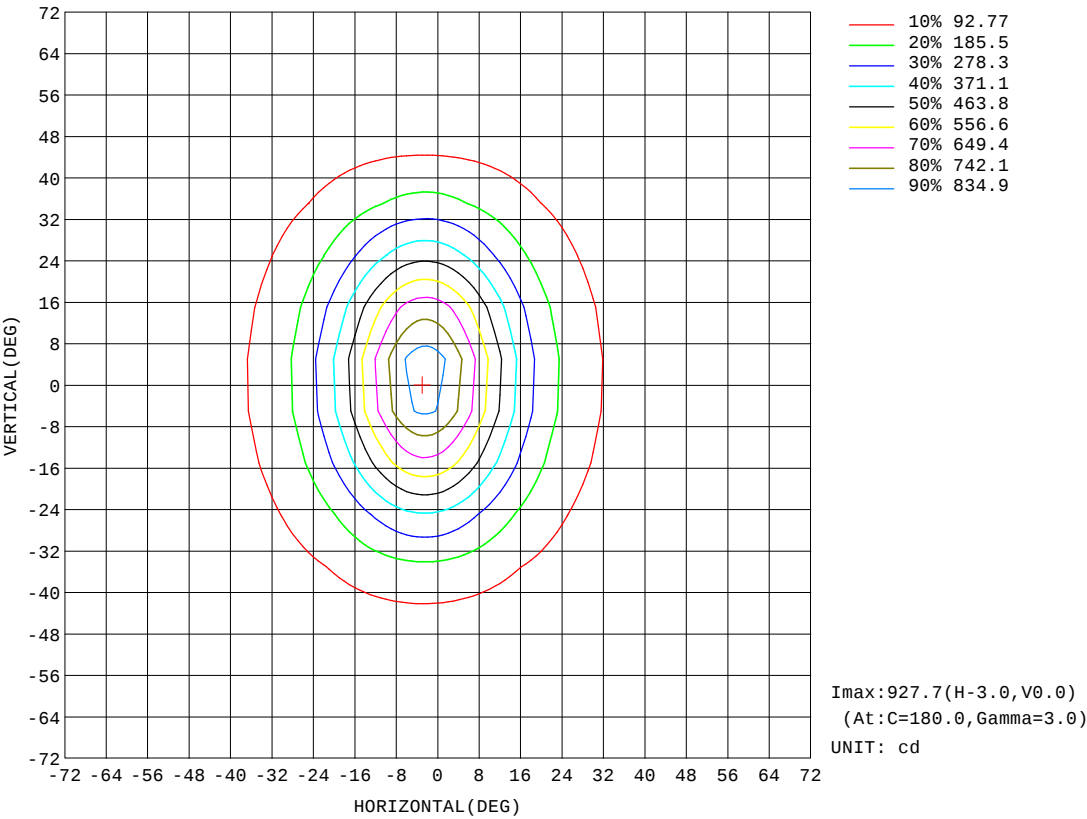


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.3V I:0.0426A P:8.693W PF:0.9212 Lamp Flux:531.729x1 lm		
NAME: 8.02.003.0424 20x40°LLS-COVE2-W40-8W-277V-010PE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:20240700018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

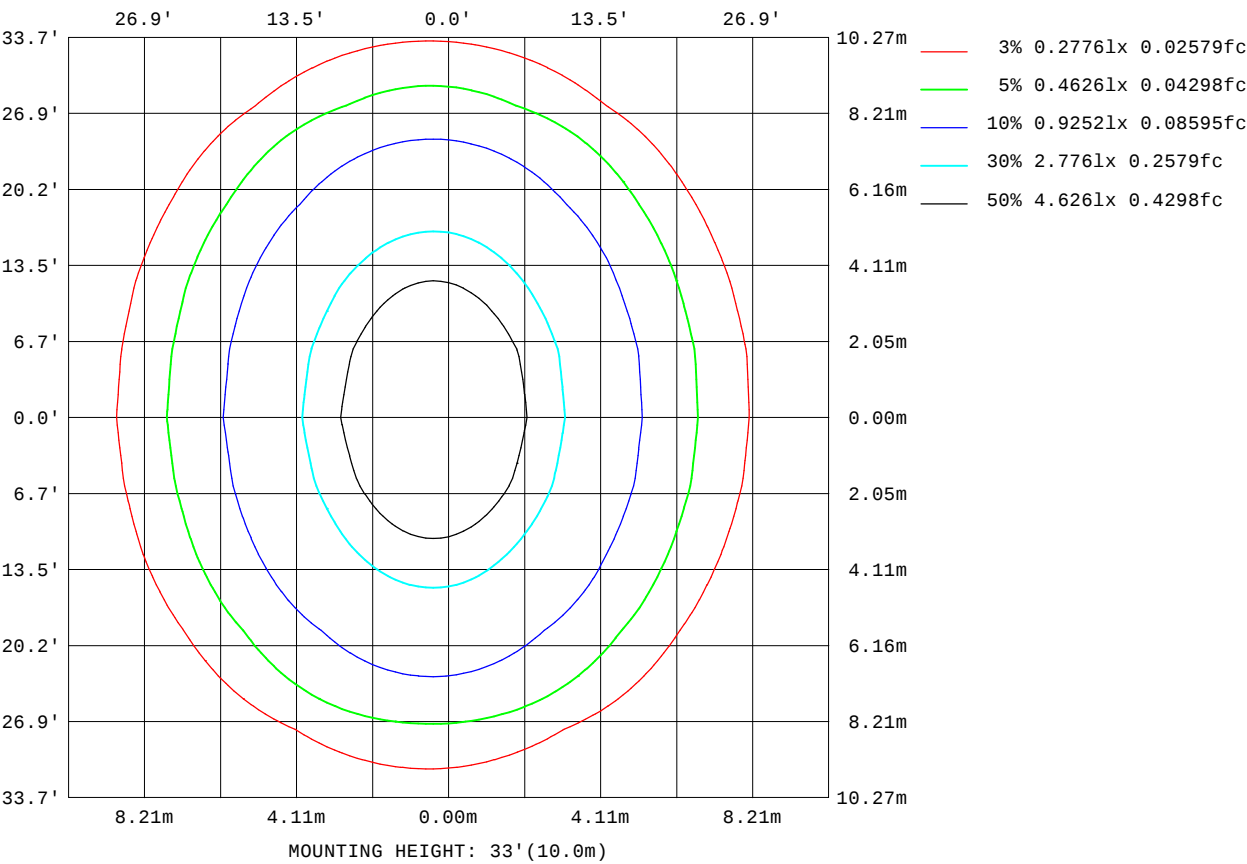


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.3V I:0.0426A P:8.693W PF:0.9212 Lamp Flux:531.729x1 lm		
NAME: 8.02.003.0424 20x40°LLS-COVE2-W40-8W-277V-010PE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:20240700018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

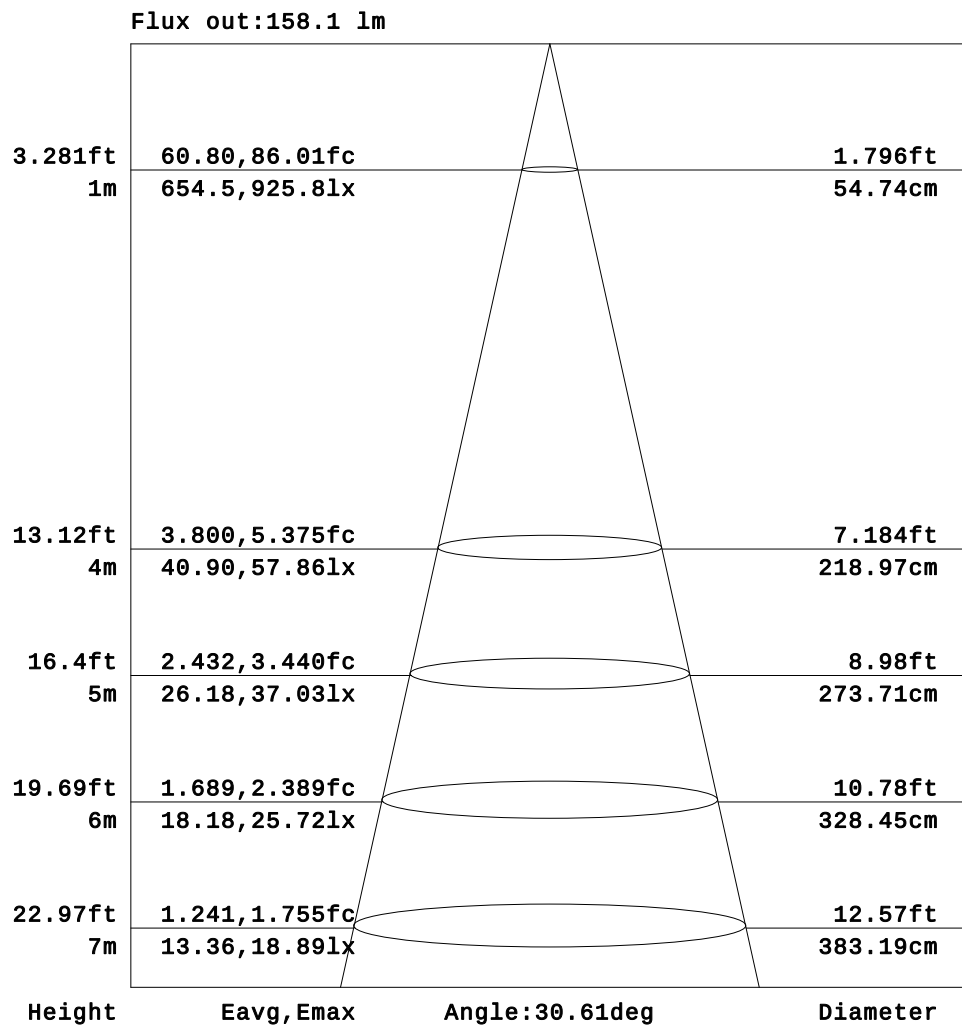


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

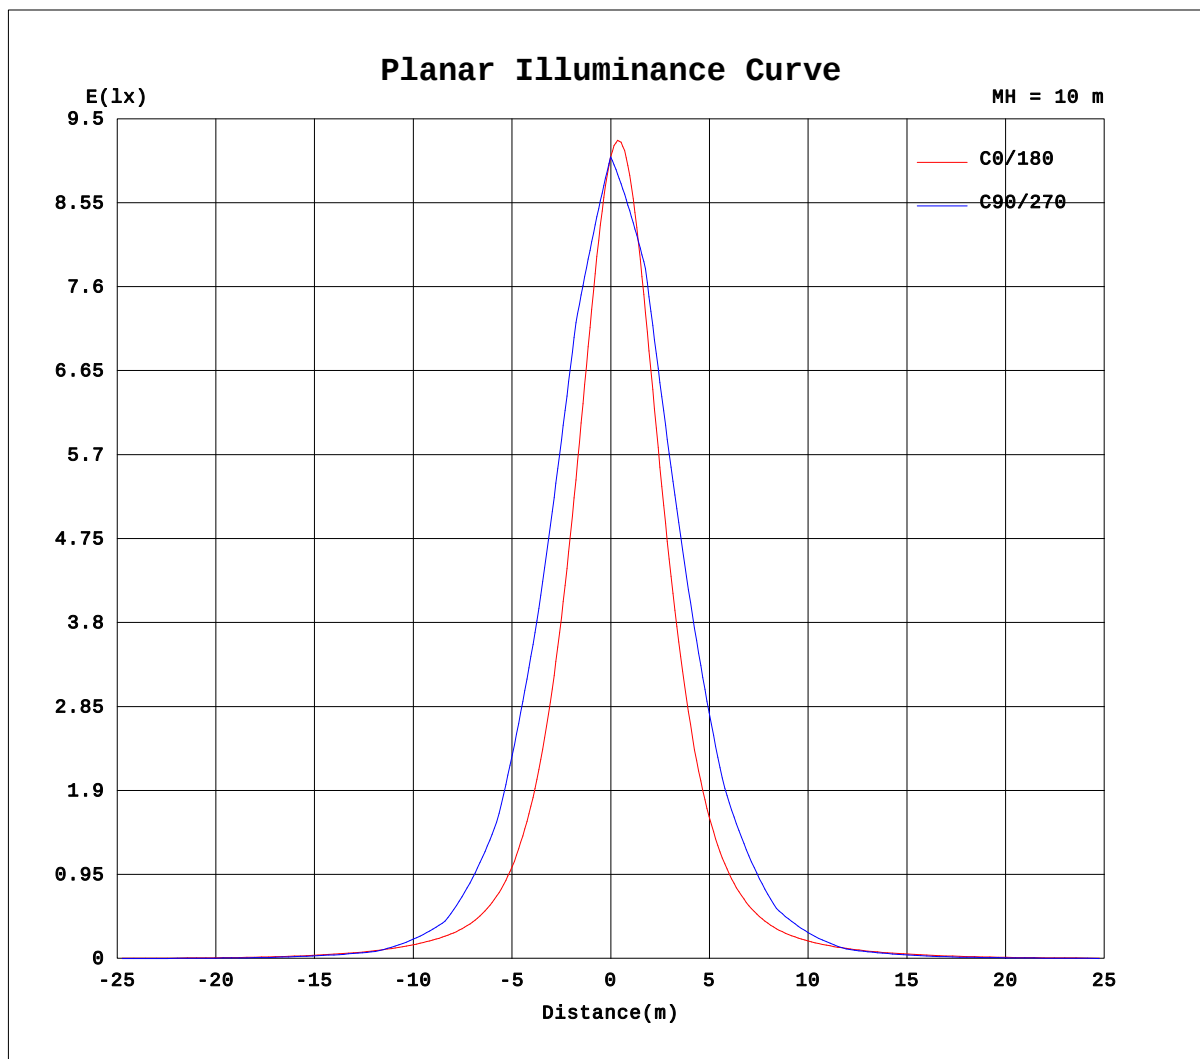

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.0426A P:8.693W PF:0.9212 Lamp Flux:531.729x1 lm		
NAME: 8.02.003.0424 20x40°LLS-COVE2-W40-8W-277V-010PE:LED		WEIGHT:
DIM.:		SERIAL No.:20240700018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.46	0.84	0.93	1.04	1.34	1.85	1.95	1.48	0.34	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.17	0.63	1.11	1.71	1.98	2.19	2.71	3.94	4.92	4.94	3.75	2.88	1.81	0.84	0.39	
-70	0.00	0.00	0.00	0.00	0.34	1.27	1.76	2.58	3.03	3.33	4.08	6.02	7.88	8.40	7.16	5.76	3.63	1.68	0.78	
-65	0.00	0.00	0.00	0.00	0.61	1.57	2.46	3.34	4.25	5.29	6.74	9.19	11.2	11.7	11.0	9.88	8.30	6.93	6.17	
-60	0.00	0.00	0.00	0.00	0.88	1.86	3.17	4.09	5.48	7.24	9.39	12.4	14.5	15.0	14.8	14.0	13.0	12.2	11.6	
-55	0.00	0.00	0.00	0.20	1.31	2.52	4.31	5.95	8.09	11.0	14.7	18.4	20.7	21.7	22.1	22.1	22.0	21.7	21.1	
-50	0.00	0.00	0.00	0.40	1.74	3.17	5.45	7.81	10.7	14.7	20.1	24.4	26.8	28.4	29.4	30.2	31.0	31.2	30.7	
-45	0.00	0.00	0.00	0.79	2.53	4.55	7.60	11.0	15.5	21.2	27.6	32.6	37.1	42.0	47.9	54.2	59.8	63.0	62.5	
-40	0.00	0.00	0.00	1.19	3.32	5.93	9.75	14.3	20.2	27.7	35.1	40.8	47.3	55.7	66.4	78.1	88.6	94.8	94.3	
-35	0.00	0.00	0.00	1.27	4.19	7.77	12.2	17.9	25.1	33.5	41.6	50.0	61.6	78.0	99.9	126	150	166	166	
-30	0.00	0.00	0.00	1.35	5.06	9.61	14.6	21.6	29.9	39.3	48.1	59.1	75.9	100	133	173	212	238	238	
-25	0.00	0.00	0.00	2.06	6.15	11.0	16.9	24.6	33.7	43.6	54.3	69.8	94.5	132	184	249	314	358	358	
-20	0.00	0.00	0.00	2.78	7.24	12.5	19.2	27.6	37.4	47.9	60.5	80.5	113	163	234	324	417	478	477	
-15	0.00	0.00	0.00	3.64	7.77	13.3	20.6	29.4	39.6	50.7	65.4	89.6	130	194	284	402	527	615	615	
-10	0.00	0.00	0.00	4.49	8.30	14.2	21.9	31.2	41.7	53.4	70.2	98.7	147	224	335	481	638	751	753	
-5	0.00	0.00	0.64	4.74	8.65	14.7	22.8	32.2	42.8	55.0	72.9	104	156	240	364	525	702	830	830	
0	0.00	0.00	1.28	4.98	9.01	15.3	23.6	33.2	43.9	56.6	75.6	109	165	256	392	569	765	908	907	
5	0.00	0.00	1.20	4.90	8.77	14.9	23.1	32.6	43.1	55.6	73.9	106	159	246	374	541	725	860	862	
10	0.00	0.00	1.11	4.83	8.52	14.6	22.5	31.9	42.4	54.5	72.2	102	154	237	356	513	686	812	818	
15	0.00	0.00	1.44	4.66	8.12	13.9	21.4	30.5	40.8	52.2	68.1	94.7	139	209	310	442	583	685	688	
20	0.00	0.00	1.77	4.50	7.71	13.2	20.3	29.1	39.2	50.0	63.9	86.9	124	182	264	371	481	557	558	
25	0.00	0.00	0.89	4.17	7.00	11.9	18.2	26.4	36.0	46.2	58.0	76.2	106	150	212	291	371	426	427	
30	0.00	0.00	0.01	3.83	6.29	10.6	16.2	23.8	32.8	42.4	52.0	65.6	86.8	118	160	211	262	296	297	
35	0.00	0.00	0.01	3.08	5.66	9.18	13.9	20.5	28.4	37.4	45.8	56.1	71.3	92.8	122	156	189	211	212	
40	0.00	0.00	0.00	2.33	5.02	7.73	11.5	17.1	24.1	32.3	39.6	46.6	55.8	67.9	83.4	101	117	127	127	
45	0.00	0.00	0.00	1.98	4.31	6.36	9.33	13.5	18.9	25.6	32.1	37.5	43.5	51.0	60.0	69.7	78.6	84.1	83.8	
50	0.00	0.00	0.00	1.63	3.59	5.00	7.11	9.80	13.8	18.8	24.6	28.5	31.2	34.0	36.5	38.7	40.5	41.4	41.1	
55	0.00	0.00	0.00	0.81	2.45	4.09	5.57	7.45	10.4	14.0	18.2	21.7	24.1	25.7	27.0	27.6	28.3	28.6	28.4	
60	0.00	0.00	0.00	0.00	1.30	3.17	4.03	5.11	6.92	9.09	11.7	15.0	16.9	17.3	17.4	16.6	16.0	15.8	15.7	
65	0.00	0.00	0.00	0.00	0.65	1.81	2.77	4.05	5.17	6.59	8.79	11.4	13.2	13.2	13.0	12.3	10.9	10.2	9.99	
70	0.00	0.00	0.00	0.00	0.00	0.45	1.50	2.99	3.43	4.09	5.84	7.77	9.38	9.15	8.49	7.92	5.81	4.56	4.24	
75	0.00	0.00	0.00	0.00	0.00	0.22	0.75	1.50	2.43	2.98	4.11	5.40	6.44	6.62	6.04	3.96	2.91	2.28	2.12	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.43	1.87	2.38	3.02	3.50	4.09	3.59	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.3V I:0.0426A P:8.693W PF:0.9212 Lamp Flux:531.729x1 lm		
NAME: 8.02.003.0424 20x40°LLS-COVE2-W40-8W-277V-01TYPE:LED		WEIGHT:
DIM.:		SERIAL No.:20240700018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	1.16	1.49	1.45	1.24	0.68	0.26	0.36	0.25	0.28	0.00	0.00	0.00	0.00
-75	0.42	0.97	1.80	2.66	3.43	3.64	2.93	2.28	1.85	1.27	0.91	0.87	0.64	0.37	0.00	0.00	0.00	0.00
-70	0.84	1.94	3.61	5.32	6.87	6.11	4.37	3.11	2.45	1.87	1.55	1.38	1.04	0.47	0.00	0.00	0.00	0.00
-65	6.01	6.59	7.69	8.52	9.27	8.60	6.66	4.90	3.63	2.78	2.31	1.95	1.53	0.98	0.00	0.00	0.00	0.00
-60	11.2	11.2	11.8	11.7	11.7	11.1	8.94	6.68	4.80	3.70	3.08	2.52	2.02	1.48	0.00	0.00	0.00	0.00
-55	20.3	19.7	19.2	18.4	17.6	16.5	14.2	10.7	7.68	5.65	4.23	3.35	2.59	1.96	0.82	0.00	0.00	0.00
-50	29.5	28.1	26.6	25.1	23.5	21.9	19.5	14.6	10.6	7.59	5.39	4.17	3.17	2.43	1.64	0.00	0.00	0.00
-45	58.3	52.0	45.3	39.4	34.2	30.1	26.6	21.3	15.6	11.1	7.69	5.47	4.02	3.02	2.01	0.00	0.00	0.00
-40	87.1	75.9	64.1	53.6	44.9	38.3	33.8	28.0	20.7	14.6	9.99	6.78	4.87	3.61	2.39	0.01	0.00	0.00
-35	150	125	98.7	76.8	60.0	48.1	40.4	33.7	25.8	18.6	12.7	8.53	5.88	4.12	2.69	0.48	0.00	0.00
-30	212	173	133	100.0	75.1	57.8	47.0	39.5	30.9	22.6	15.5	10.3	6.89	4.62	2.98	0.96	0.00	0.00
-25	313	247	183	131	93.6	68.5	53.2	43.6	34.5	25.7	18.0	11.9	7.72	5.05	3.18	1.20	0.00	0.00
-20	414	321	233	163	112	79.3	59.3	47.7	38.2	28.8	20.5	13.5	8.56	5.48	3.37	1.44	0.00	0.00
-15	528	404	287	194	131	89.8	65.0	50.8	40.5	30.9	22.3	14.7	9.28	5.83	3.56	1.58	0.00	0.00
-10	643	486	340	226	150	100	70.6	53.8	42.8	32.9	24.0	16.0	10.0	6.17	3.74	1.72	0.00	0.00
-5	704	527	365	242	158	105	73.0	55.2	43.8	33.7	24.6	16.3	10.2	6.26	3.79	1.75	0.03	0.00
0	764	567	391	258	167	109	75.4	56.6	44.7	34.4	25.2	16.7	10.3	6.34	3.84	1.78	0.06	0.00
5	731	546	379	249	163	107	74.4	56.1	44.4	34.1	24.9	16.5	10.3	6.32	3.81	1.75	0.03	0.00
10	698	526	366	241	158	105	73.5	55.6	44.1	33.7	24.6	16.3	10.3	6.30	3.77	1.72	0.01	0.00
15	591	449	317	213	142	96.0	68.7	53.0	42.1	31.9	23.0	15.3	9.68	6.05	3.63	1.61	0.14	0.00
20	483	373	268	185	125	87.0	63.9	50.4	40.0	30.1	21.5	14.3	9.09	5.80	3.48	1.50	0.27	0.00
25	374	293	215	152	106	76.3	58.0	46.7	36.7	27.3	19.2	12.9	8.37	5.43	3.36	1.39	0.33	0.00
30	264	213	162	119	87.6	65.7	52.1	42.9	33.4	24.5	17.0	11.4	7.65	5.05	3.24	1.28	0.39	0.00
35	190	157	122	92.9	70.8	55.2	45.2	37.0	28.3	20.6	14.2	9.66	6.63	4.51	2.91	1.18	0.52	0.00
40	116	99.9	82.3	66.7	54.0	44.7	38.3	31.2	23.2	16.6	11.5	7.91	5.62	3.96	2.57	1.07	0.66	0.00
45	77.9	68.6	58.5	49.2	41.3	35.3	30.4	24.3	18.0	13.0	9.12	6.58	4.80	3.44	2.36	1.05	0.50	0.00
50	39.6	37.4	34.8	31.8	28.7	25.9	22.6	17.4	12.8	9.34	6.77	5.25	3.99	2.93	2.14	1.03	0.34	0.00
55	27.7	26.8	25.8	24.0	22.2	20.0	16.8	12.9	9.56	7.12	5.39	4.28	3.37	2.66	1.82	0.72	0.17	0.00
60	15.8	16.2	16.7	16.3	15.7	14.1	11.1	8.42	6.28	4.90	4.01	3.32	2.75	2.40	1.50	0.40	0.00	0.00
65	10.4	11.5	12.5	12.7	12.7	11.3	8.66	6.43	4.93	3.95	3.22	2.74	2.31	1.82	1.15	0.59	0.00	0.00
70	5.09	6.89	8.24	9.02	9.68	8.55	6.19	4.45	3.57	3.00	2.44	2.16	1.88	1.24	0.80	0.77	0.00	0.00
75	2.55	3.44	4.49	6.04	6.67	6.06	4.48	3.24	2.59	2.23	1.86	1.47	1.18	0.86	0.40	0.39	0.00	0.00
80	0.00	0.00	0.74	3.06	3.66	3.58	2.77	2.04	1.61	1.45	1.29	0.77	0.49	0.49	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: