

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	438.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	135.4V x 144.2H
	At 50% of Imax	94.6V x 103.4H
	At 90% of Imax	42.2V x 48.5H

Beam Flux	Total	998.8 lumens per klm.
	To 10% of Imax	977.1 lumens per klm.
	To 50% of Imax	741.1 lumens per klm.
	To 90% of Imax	202.5 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.3333A P:7.999W PF:1.000 Freq:0Hz Lamp Flux:491.145x1 lm		
NAME: 8.02.003.0442 LLS-COVE1-W40-8W-24V-001	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

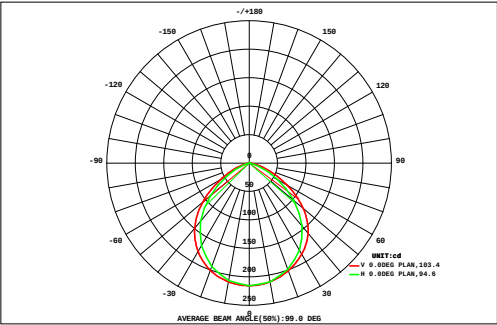

DATA OF LAMP		Eff:61.40lm/W	
MODEL	LLS-COVE1-W40-8W-24V-001	Imax(cd)	215.4
NOMINAL POWER(W)	8	AVAILABILITY(%)	98.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	481.4
NOMINAL FLUX(lm)	491.145	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	491.1
TEST VOLTAGE(V)	24	θ @50%(H,V)	103,95DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.01	0.03	0.06	0.09	0.11	0.12	0.12	0.11	0.10	0.08	0.05	0.02	0.00	0.00	0.00	0.00	0.90	0.00
80	0.00	0.00	0.05	0.17	0.32	0.48	0.62	0.71	0.75	0.72	0.64	0.51	0.36	0.21	0.08	0.02	0.00	0.00	5.64	3.46
70	0.00	0.03	0.17	0.42	0.78	1.20	1.59	1.87	1.99	1.95	1.76	1.43	1.04	0.64	0.32	0.10	0.01	0.00	15.3	14.6
60	0.00	0.06	0.28	0.71	1.34	2.07	2.73	3.19	3.39	3.34	3.07	2.55	1.87	1.17	0.58	0.21	0.02	0.00	26.6	26.2
50	0.00	0.09	0.40	1.03	1.95	2.95	3.79	4.35	4.60	4.57	4.26	3.64	2.75	1.75	0.88	0.31	0.05	0.00	37.4	37.1
40	0.00	0.12	0.51	1.34	2.48	3.63	4.57	5.20	5.49	5.48	5.17	4.49	3.48	2.28	1.16	0.41	0.07	0.00	45.9	45.7
30	0.00	0.14	0.61	1.57	2.85	4.07	5.07	5.77	6.12	6.12	5.77	5.04	3.96	2.64	1.36	0.49	0.09	0.00	51.7	51.5
20	0.00	0.15	0.66	1.70	3.03	4.27	5.28	6.03	6.44	6.45	6.06	5.29	4.16	2.82	1.49	0.54	0.10	0.00	54.5	54.3
10	0.00	0.15	0.68	1.73	3.06	4.29	5.30	6.05	6.46	6.47	6.06	5.26	4.14	2.81	1.49	0.53	0.10	0.00	54.6	54.4
0	0.00	0.15	0.66	1.66	2.95	4.15	5.14	5.86	6.23	6.21	5.80	5.02	3.94	2.65	1.37	0.48	0.08	0.00	52.4	52.2
-10	0.00	0.13	0.60	1.49	2.67	3.83	4.78	5.43	5.73	5.67	5.28	4.56	3.53	2.31	1.15	0.39	0.06	0.00	47.6	47.5
-20	0.00	0.10	0.48	1.20	2.20	3.24	4.13	4.69	4.92	4.84	4.48	3.83	2.91	1.84	0.90	0.30	0.04	0.00	40.1	39.9
-30	0.00	0.07	0.35	0.87	1.62	2.44	3.16	3.63	3.80	3.71	3.39	2.83	2.07	1.26	0.60	0.20	0.02	0.00	30.0	29.7
-40	0.00	0.04	0.22	0.55	1.01	1.54	2.01	2.32	2.43	2.36	2.11	1.71	1.21	0.72	0.34	0.10	0.00	0.00	18.7	18.2
-50	0.00	0.02	0.11	0.28	0.50	0.74	0.95	1.08	1.11	1.05	0.91	0.71	0.49	0.28	0.11	0.02	0.00	0.00	8.35	6.62
-60	0.00	0.00	0.02	0.08	0.13	0.18	0.21	0.22	0.21	0.18	0.15	0.11	0.07	0.03	0.00	0.00	0.00	0.00	1.59	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL(DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.03	1.26	5.81	14.8	26.9	39.2	49.5	56.5	59.8	59.2	55.0	47.1	36.0	23.4	11.8	4.10	0.65	0.00	491	---
Φ a	0.00	0.45	5.12	14.2	26.4	38.6	48.9	55.9	59.2	58.7	54.5	46.6	35.4	22.8	11.2	3.28	0.05	0.00	---	481


one-half-peak spread: U:49.0,D:46.1 , L:53.8,R:50.1 NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3333A P:7.999W PF:1.000 Freq:0Hz Lamp Flux:491.145x1 lm		
NAME: 8.02.003.0442 LLS-COVE1-W40-8W-24V-001	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

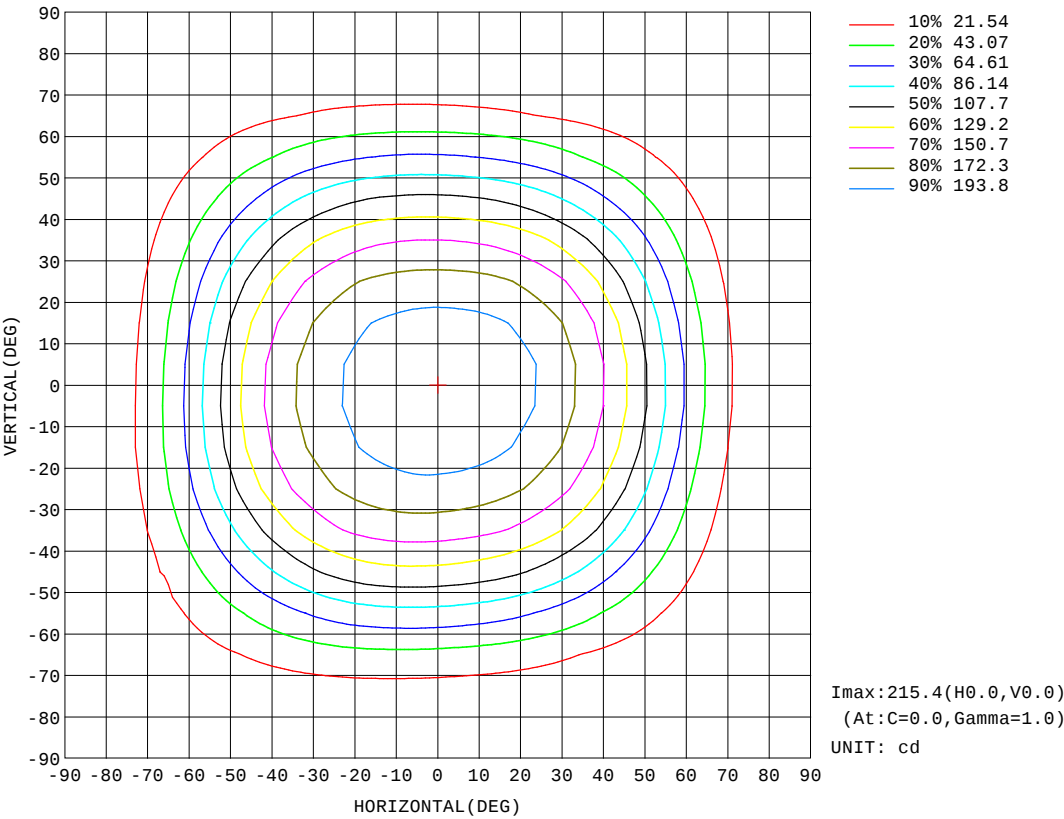


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.3333A P:7.999W PF:1.000 Freq:0Hz Lamp Flux:491.145x1 lm		
NAME: 8.02.003.0442 LLS-COVE1-W40-8W-24V-001	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

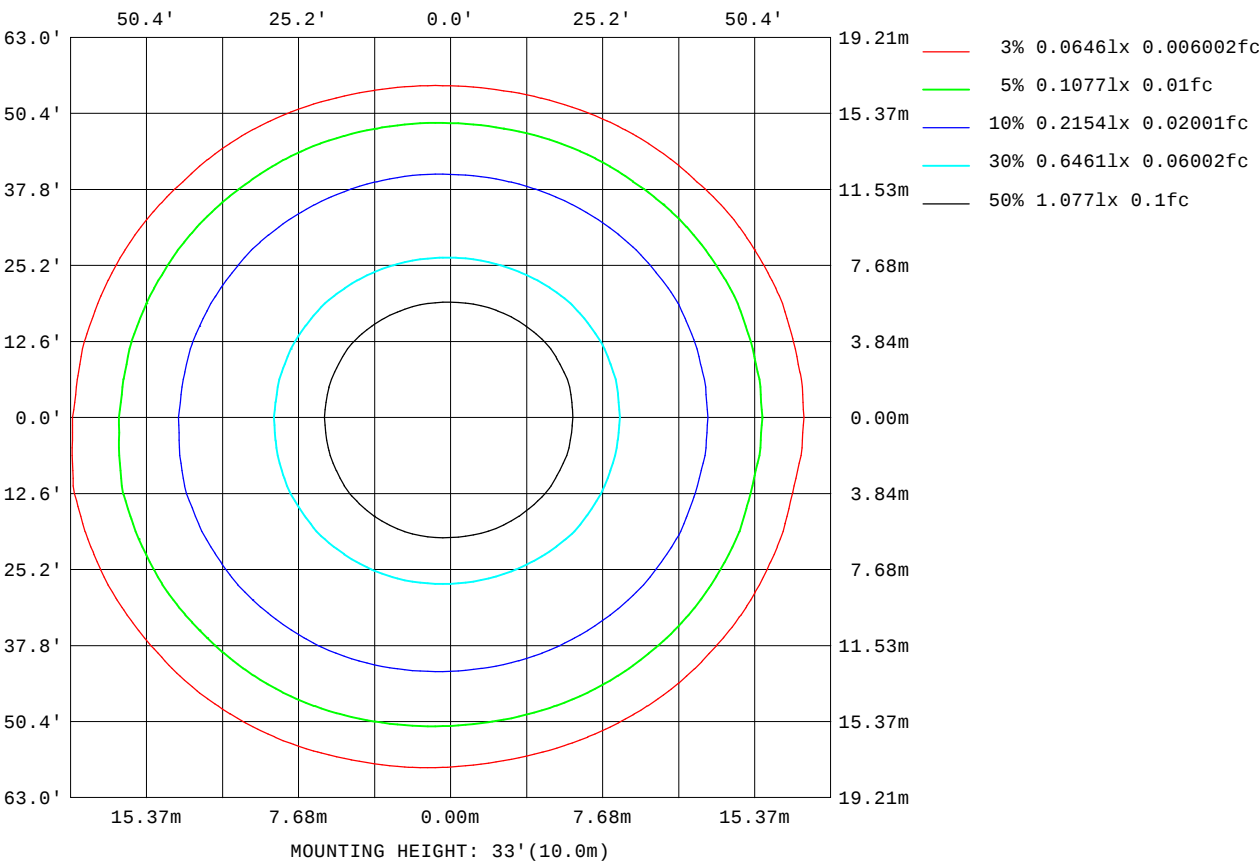

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

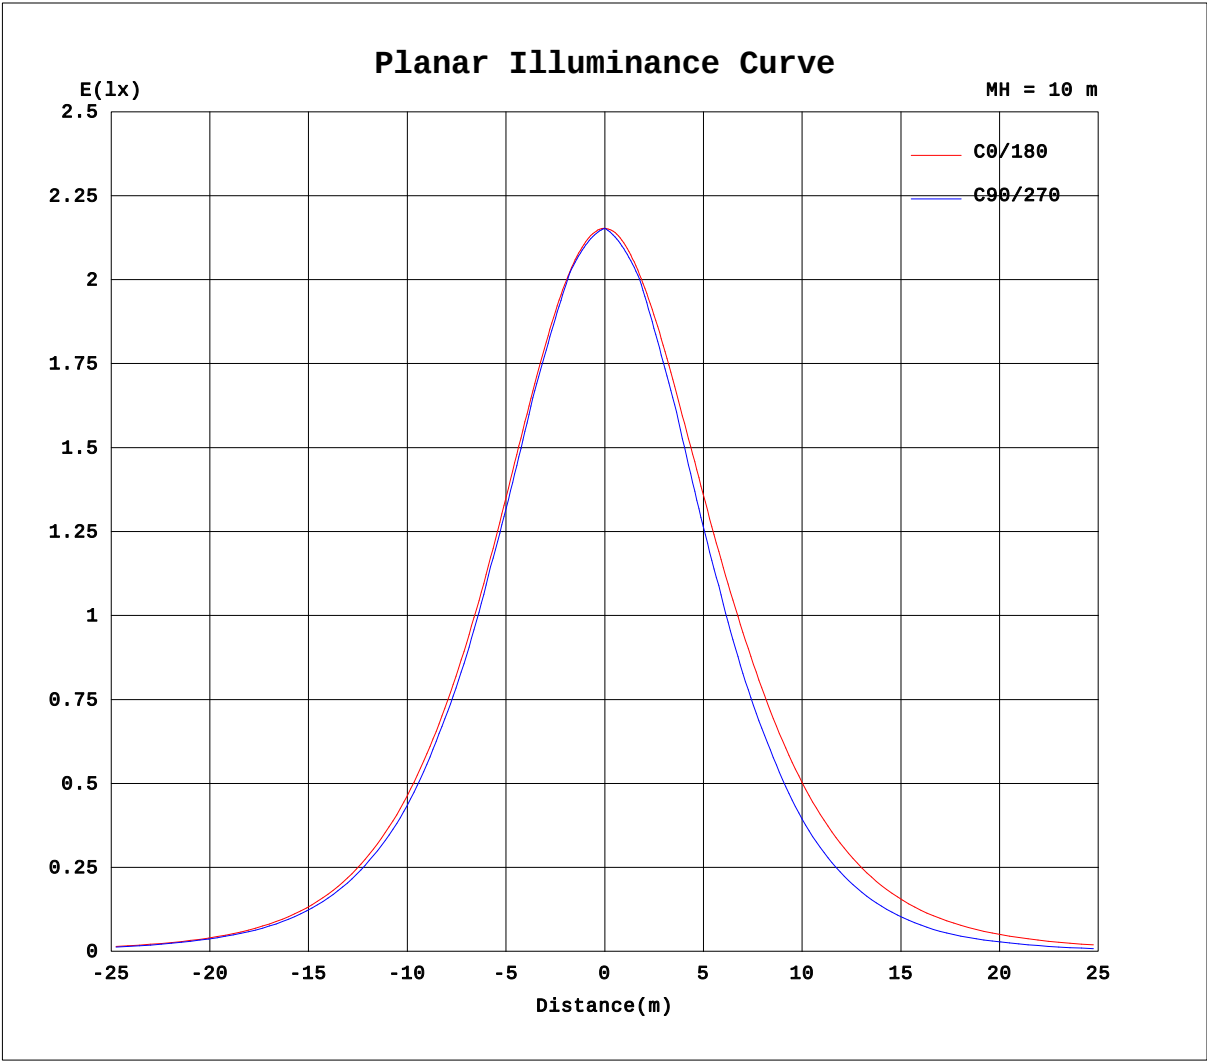


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3333A P:7.999W PF:1.000 Freq:0Hz Lamp Flux:491.145x1 lm		
NAME: 8.02.003.0442 LLS-COVE1-W40-8W-24V-001	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

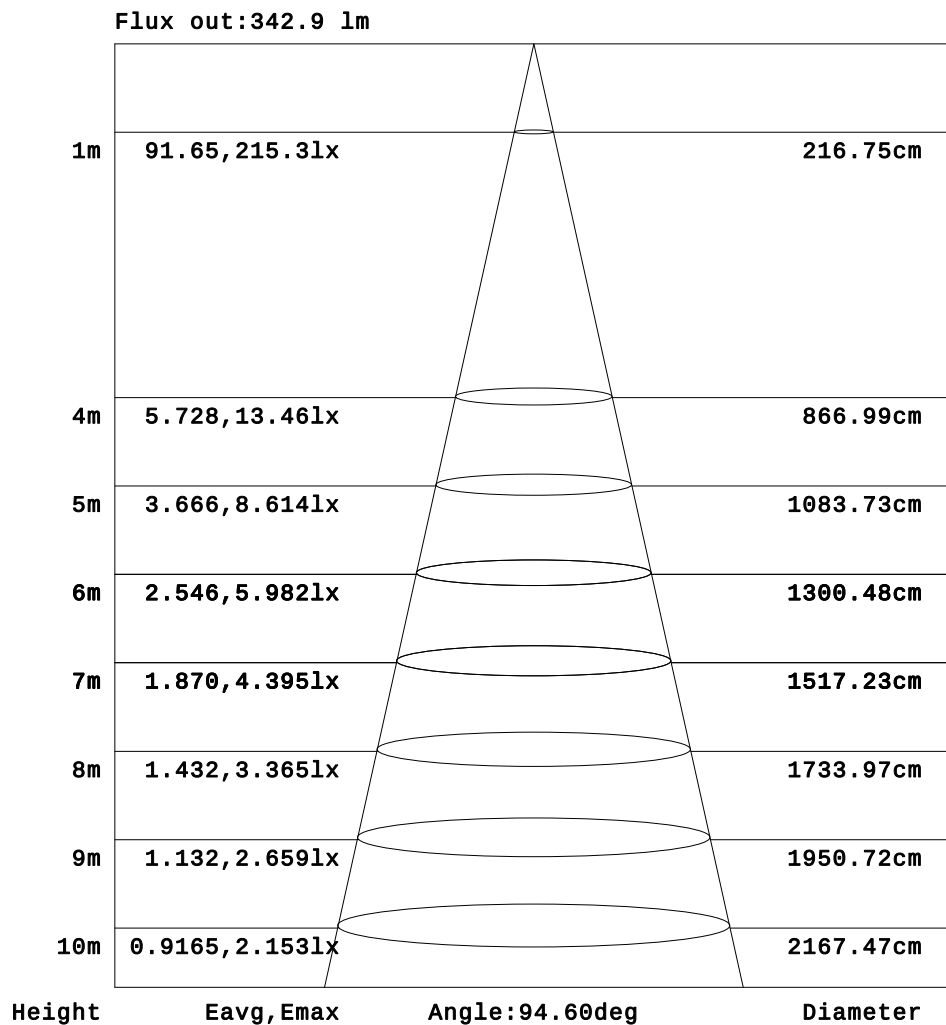

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3333A P:7.999W PF:1.000 Freq:0Hz Lamp Flux:491.145x1 lm																	
NAME: 8.02.003.0442 LLS-COVE1-W40-8W-24V-001									TYPE:LED						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:202410039		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	1.77	2.70	4.60	5.69	6.69	7.59	8.35	8.97	9.42	9.68	9.70	9.61	9.37	9.03
-70	0.00	0.00	0.00	0.00	0.00	4.66	7.28	9.65	11.8	13.8	15.5	17.0	18.2	19.0	19.4	19.4	19.1	18.6	17.9
-65	0.00	0.00	0.00	1.56	3.82	7.88	11.4	15.9	19.7	23.4	26.9	30.1	32.9	35.2	36.8	37.7	38.0	37.8	37.1
-60	0.00	0.00	0.00	3.02	8.62	13.2	18.4	23.7	29.0	34.4	39.6	44.4	48.7	52.2	54.7	56.1	56.8	56.8	55.9
-55	0.00	0.00	0.00	4.25	9.92	15.3	23.3	30.6	38.2	46.0	53.7	60.9	67.1	72.3	76.1	78.5	79.8	80.0	79.3
-50	0.00	0.00	0.00	6.61	13.2	22.4	31.1	40.5	50.5	60.8	70.8	79.9	87.7	94.2	98.8	102	103	103	102
-45	0.00	0.00	0.45	8.06	15.4	24.4	36.1	47.8	60.3	73.1	85.1	95.9	105	113	119	122	124	124	123
-40	0.00	0.00	2.35	12.0	20.3	32.7	45.7	60.1	75.3	90.3	104	116	126	134	140	144	145	145	144
-35	0.00	0.00	2.01	11.1	21.7	34.6	49.3	65.7	82.9	99.6	115	128	139	148	154	158	161	161	161
-30	0.00	0.00	2.82	14.5	27.5	42.0	59.2	78.2	97.3	115	131	144	156	164	170	174	176	177	176
-25	0.00	0.00	3.48	13.8	27.2	42.5	61.0	81.4	102	121	137	151	163	172	179	183	186	188	188
-20	0.00	0.00	5.81	18.8	32.6	50.0	70.8	93.0	115	134	150	163	174	182	189	194	197	199	199
-15	0.00	0.00	3.29	16.3	29.9	47.3	68.4	91.5	114	134	151	165	176	185	193	198	202	205	205
-10	0.00	0.00	5.89	19.0	33.6	52.6	75.2	99.4	122	142	158	171	182	191	198	204	208	211	212
-5	0.00	0.00	4.21	16.4	30.3	48.5	70.8	95.1	119	139	157	170	181	191	198	204	209	212	213
0	0.00	0.00	7.63	18.8	33.6	52.8	75.9	101	124	144	161	174	185	194	201	207	212	214	215
5	0.00	0.00	5.39	15.8	29.3	47.2	69.1	93.3	117	138	155	170	181	190	198	204	208	211	213
10	0.00	0.00	6.97	17.6	31.6	49.8	71.7	95.7	119	139	156	170	181	190	197	202	206	209	210
15	0.00	0.00	4.75	14.5	27.0	43.5	63.5	86.1	109	129	147	161	173	182	189	195	198	201	202
20	0.00	0.00	6.17	15.9	28.5	44.6	64.0	85.8	108	127	143	157	169	178	184	189	192	193	194
25	0.00	0.00	3.25	12.4	23.3	37.2	54.1	73.5	93.8	113	129	143	155	164	171	176	179	180	181
30	0.00	0.00	4.45	12.8	23.1	36.1	51.6	69.4	87.8	105	121	135	145	154	160	164	167	168	168
35	0.00	0.00	1.47	9.56	18.3	29.1	42.1	57.0	73.0	88.8	104	117	127	136	142	147	149	151	151
40	0.00	0.00	2.50	9.52	17.5	27.1	38.3	51.0	64.6	78.5	91.6	103	113	121	127	131	133	134	134
45	0.00	0.00	0.42	6.25	12.9	20.6	29.5	39.6	50.5	61.8	72.8	83.0	91.7	99.0	105	108	111	112	112
50	0.00	0.00	0.00	5.48	11.2	17.5	24.6	32.5	40.9	49.6	58.2	66.3	73.5	79.5	84.2	87.3	89.3	90.1	89.5
55	0.00	0.00	0.00	2.30	7.25	12.2	17.7	23.6	29.9	36.3	42.7	48.7	54.2	58.8	62.4	64.9	66.5	67.3	67.0
60	0.00	0.00	0.00	0.88	5.28	9.07	13.0	17.2	21.4	25.6	29.7	33.5	36.8	39.6	41.8	43.4	44.3	44.6	44.2
65	0.00	0.00	0.00	0.10	2.27	4.54	7.47	10.3	13.2	15.9	18.6	21.0	23.1	24.8	26.1	27.0	27.5	27.6	27.4
70	0.00	0.00	0.00	0.00	0.00	1.32	3.03	4.59	6.06	7.36	8.50	9.43	10.1	10.6	10.9	10.9	10.8	10.6	10.4
75	0.00	0.00	0.00	0.00	0.00	0.39	1.35	2.15	2.89	3.56	4.15	4.63	5.01	5.26	5.41	5.45	5.43	5.35	5.21
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-10-24

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3333A P:7.999W PF:1.000 Freq:0Hz Lamp Flux:491.145x1 lm		
NAME: 8.02.003.0442 LLS-COVE1-W40-8W-24V-001	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202410039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	8.60	8.12	7.55	6.90	6.18	5.37	4.49	3.54	2.55	1.53	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	17.0	16.0	14.9	13.5	12.0	10.4	8.61	6.70	4.70	2.65	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	35.9	34.5	32.6	30.3	27.5	24.4	21.0	17.5	14.0	10.4	6.94	4.11	1.93	0.05	0.00	0.00	0.00	0.00	
-60	54.3	52.3	49.5	46.0	41.7	37.0	32.1	27.0	21.9	16.8	12.0	7.32	3.01	0.00	0.00	0.00	0.00	0.00	
-55	77.7	75.4	72.2	68.0	62.6	56.4	49.5	42.2	34.6	27.2	20.2	13.7	7.85	2.77	0.11	0.00	0.00	0.00	
-50	100	97.3	93.4	87.9	81.2	73.1	64.1	54.4	44.3	34.7	25.7	17.6	10.5	4.28	0.00	0.00	0.00	0.00	
-45	122	119	115	110	103	93.8	83.7	72.0	59.7	47.2	35.4	24.9	15.8	8.03	1.67	0.00	0.00	0.00	
-40	142	139	135	129	121	111	98.8	84.9	70.0	55.0	40.7	28.2	17.7	9.03	1.75	0.00	0.00	0.00	
-35	159	156	152	146	139	129	117	102	86.1	69.0	51.9	36.6	23.7	13.2	4.71	0.00	0.00	0.00	
-30	174	172	167	161	153	143	129	114	95.5	76.0	56.5	39.3	25.0	13.7	4.61	0.00	0.00	0.00	
-25	186	184	179	173	165	155	142	127	108	88.1	66.9	47.3	30.8	17.7	7.43	0.16	0.00	0.00	
-20	197	194	189	183	174	163	150	133	114	91.7	69.0	48.1	30.7	17.1	6.67	0.00	0.00	0.00	
-15	204	202	197	191	182	172	159	143	124	102	78.9	56.4	36.9	21.6	9.93	0.98	0.00	0.00	
-10	210	208	203	196	187	176	162	145	126	104	79.4	56.2	36.4	20.9	9.15	0.40	0.00	0.00	
-5	213	210	206	200	191	180	167	151	132	110	85.9	62.0	41.1	24.4	11.8	2.00	0.00	0.00	
0	214	212	207	200	191	180	166	149	129	107	82.5	58.7	38.3	22.2	10.1	0.75	0.00	0.00	
5	212	210	206	200	192	181	167	151	132	110	85.8	62.1	41.3	24.7	12.1	2.30	0.00	0.00	
10	209	206	202	196	188	177	163	146	126	103	79.2	56.4	36.9	21.5	9.78	0.71	0.00	0.00	
15	201	199	196	190	183	172	159	143	123	102	78.8	56.9	37.8	22.6	10.9	1.68	0.00	0.00	
20	193	191	187	181	174	163	149	133	113	91.1	69.2	49.0	32.0	18.5	8.03	0.15	0.00	0.00	
25	180	178	175	170	163	153	140	125	107	86.7	66.5	47.8	31.8	19.0	8.77	0.74	0.00	0.00	
30	167	165	161	156	148	138	125	110	92.7	74.1	56.0	39.7	26.0	14.9	5.98	0.00	0.00	0.00	
35	150	148	145	139	132	123	111	97.6	82.5	66.5	50.8	36.5	24.3	14.2	5.92	0.19	0.00	0.00	
40	132	130	126	120	113	103	92.0	79.5	66.1	52.5	39.6	28.0	18.2	9.94	2.89	0.00	0.00	0.00	
45	110	108	105	100	93.7	85.7	76.4	66.3	55.4	44.5	33.9	24.4	16.0	8.77	2.52	0.00	0.00	0.00	
50	88.0	85.8	82.4	77.7	71.7	64.6	56.9	48.8	40.4	32.1	24.3	17.2	10.7	4.97	0.16	0.00	0.00	0.00	
55	65.9	64.2	61.7	58.2	53.8	48.7	43.0	37.0	30.9	24.7	18.7	13.1	7.93	3.21	0.41	0.00	0.00	0.00	
60	43.3	41.8	39.7	37.1	34.0	30.5	26.7	22.8	18.8	14.8	10.8	6.91	3.18	0.00	0.00	0.00	0.00	0.00	
65	26.8	25.8	24.6	23.0	21.1	18.9	16.5	14.0	11.3	8.61	5.87	3.84	1.96	0.17	0.00	0.00	0.00	0.00	
70	9.96	9.48	8.89	8.17	7.32	6.36	5.26	4.07	2.75	1.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	5.02	4.80	4.51	4.16	3.75	3.28	2.74	2.15	1.51	0.81	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-10-24

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: