

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	350.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	157.4V x 172.5H
	At 50% of Imax	105.8V x 113.5H
	At 90% of Imax	43.8V x 48.1H

Beam Flux	Total	996.9 lumens per klm.
	To 10% of Imax	989.2 lumens per klm.
	To 50% of Imax	704.1 lumens per klm.
	To 90% of Imax	169.2 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:59.3579x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010030
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

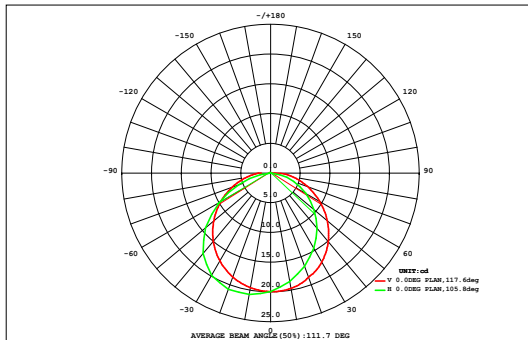

DATA OF LAMP		Eff:19.10lm/W	
MODELLS-COVE1-W40-8W-24V		Imax(cd)	20.80
NOMINAL POWER(W)	3.1	AVAILABILITY(%)	99.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	59.05
NOMINAL FLUX(lm)	59.3579	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	59.35
TEST VOLTAGE(V)	24	θ @50% (H,V)	113,106DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.01	0.02	0.04	0.05	0.07	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.02	0.01	1.06	1.01
70	0.01	0.02	0.04	0.07	0.10	0.12	0.14	0.16	0.16	0.17	0.16	0.14	0.12	0.10	0.07	0.05	0.02	0.01	1.66	1.66
60	0.01	0.03	0.06	0.09	0.13	0.17	0.21	0.23	0.25	0.25	0.24	0.21	0.18	0.14	0.10	0.06	0.03	0.01	2.39	2.39
50	0.01	0.03	0.07	0.12	0.17	0.23	0.27	0.31	0.33	0.33	0.31	0.28	0.23	0.18	0.12	0.07	0.03	0.01	3.09	3.09
40	0.01	0.03	0.08	0.14	0.21	0.27	0.33	0.38	0.40	0.40	0.38	0.34	0.28	0.21	0.15	0.08	0.04	0.01	3.76	3.76
30	0.01	0.04	0.09	0.16	0.24	0.32	0.39	0.44	0.47	0.47	0.45	0.40	0.33	0.25	0.17	0.09	0.04	0.01	4.36	4.36
	0.01	0.04	0.10	0.18	0.27	0.36	0.44	0.50	0.53	0.53	0.50	0.45	0.37	0.28	0.18	0.10	0.04	0.01	4.87	4.87
	0.01	0.04	0.10	0.19	0.29	0.39	0.48	0.54	0.58	0.58	0.55	0.49	0.40	0.30	0.19	0.11	0.04	0.01	5.28	5.28
	0.01	0.04	0.10	0.19	0.30	0.40	0.50	0.57	0.61	0.62	0.58	0.51	0.42	0.31	0.20	0.11	0.04	0.01	5.53	5.53
	0.01	0.04	0.10	0.19	0.29	0.41	0.51	0.58	0.63	0.63	0.60	0.52	0.42	0.31	0.20	0.11	0.04	0.01	5.60	5.60
	0.01	0.04	0.10	0.18	0.28	0.39	0.49	0.57	0.61	0.62	0.58	0.51	0.41	0.30	0.19	0.10	0.04	0.01	5.44	5.44
-30	0.01	0.04	0.09	0.16	0.26	0.36	0.45	0.53	0.57	0.57	0.54	0.47	0.38	0.27	0.18	0.10	0.04	0.01	5.00	5.00
-40	0.00	0.03	0.08	0.14	0.22	0.30	0.38	0.45	0.48	0.49	0.46	0.40	0.32	0.24	0.15	0.08	0.04	0.01	4.28	4.28
-50	0.00	0.03	0.06	0.11	0.17	0.24	0.29	0.34	0.37	0.37	0.35	0.31	0.25	0.19	0.12	0.07	0.03	0.00	3.32	3.31
-60	0.00	0.02	0.05	0.08	0.12	0.16	0.19	0.22	0.24	0.24	0.23	0.21	0.17	0.13	0.09	0.06	0.03	0.00	2.24	2.23
-70	0.00	0.02	0.04	0.05	0.07	0.09	0.10	0.11	0.11	0.11	0.11	0.10	0.09	0.08	0.06	0.04	0.02	0.00	1.21	1.17
-80	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.00	0.25	0.07
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.10	0.52	1.21	2.13	3.20	4.29	5.28	6.03	6.45	6.48	6.14	5.45	4.48	3.37	2.26	1.29	0.56	0.11	59	---
Φ a	0.08	0.50	1.20	2.12	3.19	4.27	5.26	6.00	6.42	6.45	6.12	5.43	4.47	3.36	2.25	1.29	0.55	0.10	---	59

one-half-peak spread: U:39.4,D:67.1 , L:59.1,R:53.1


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:59.3579x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010030
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

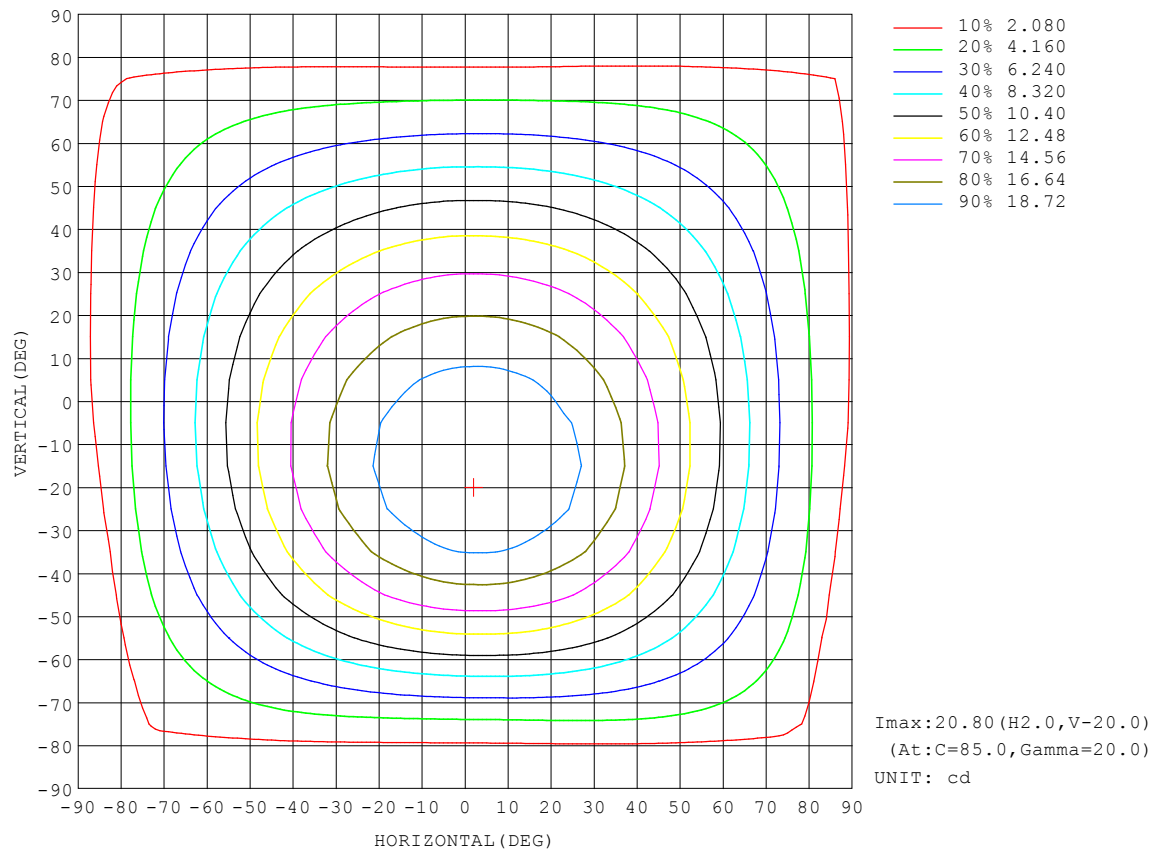


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:59.3579x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010030
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

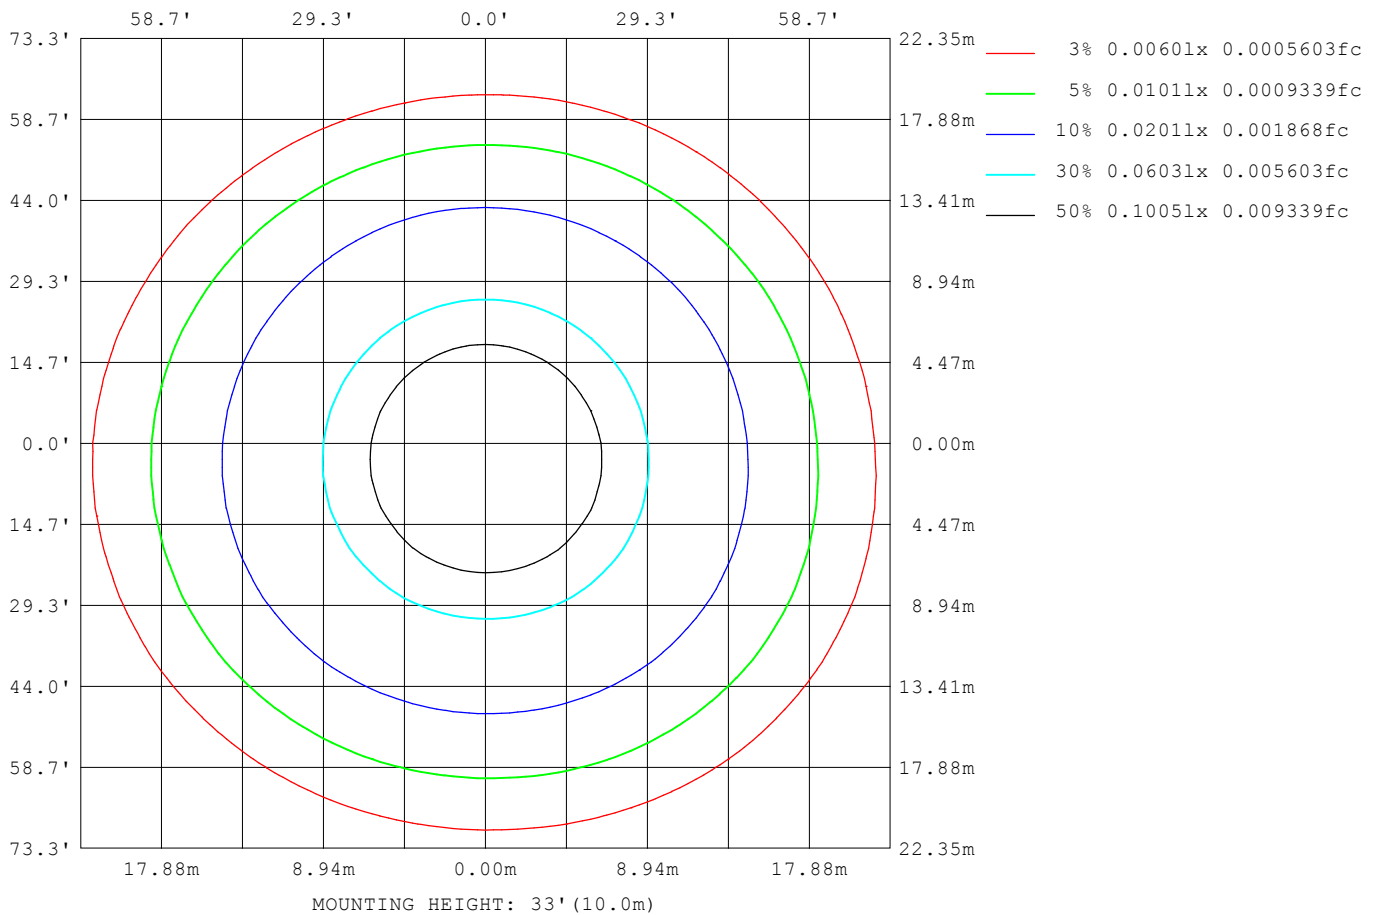


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:59.3579x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010030
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

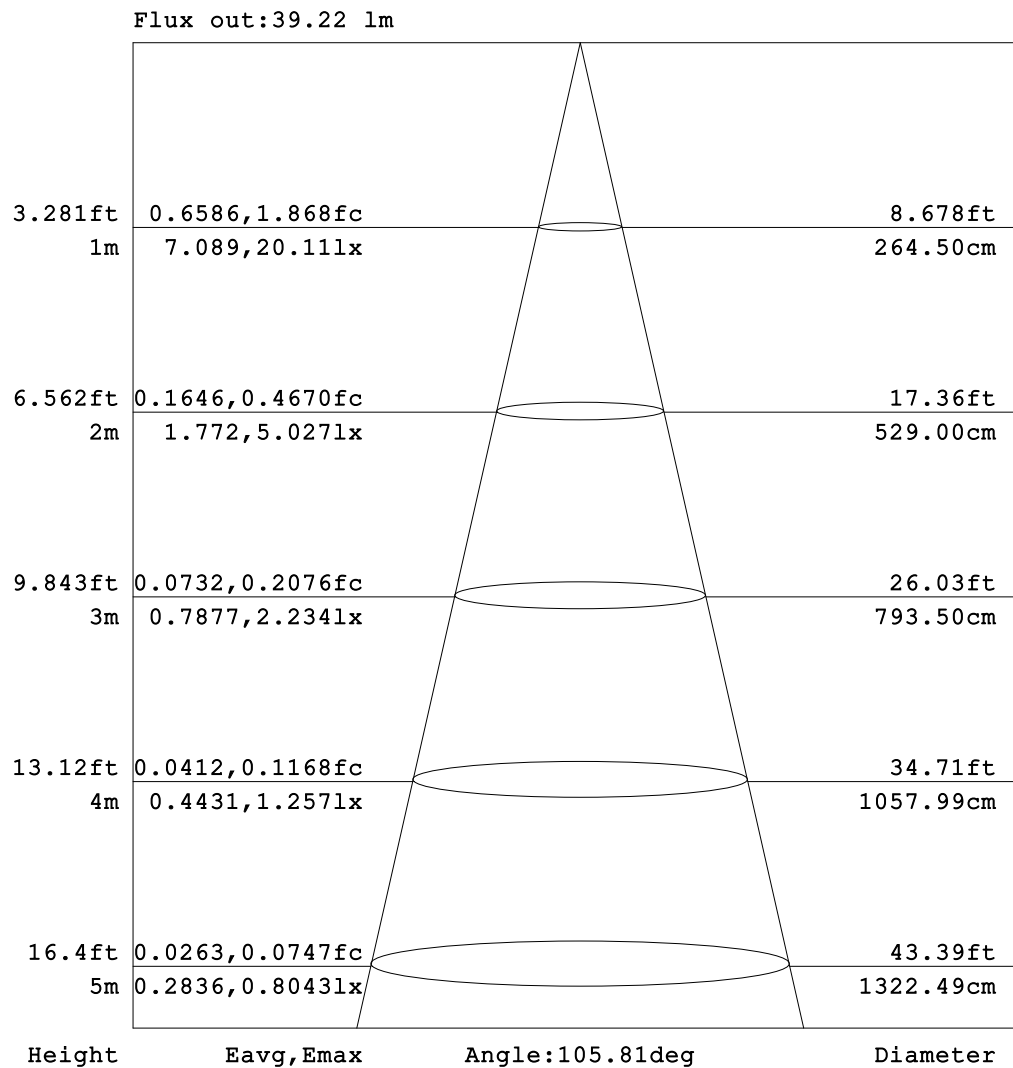


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

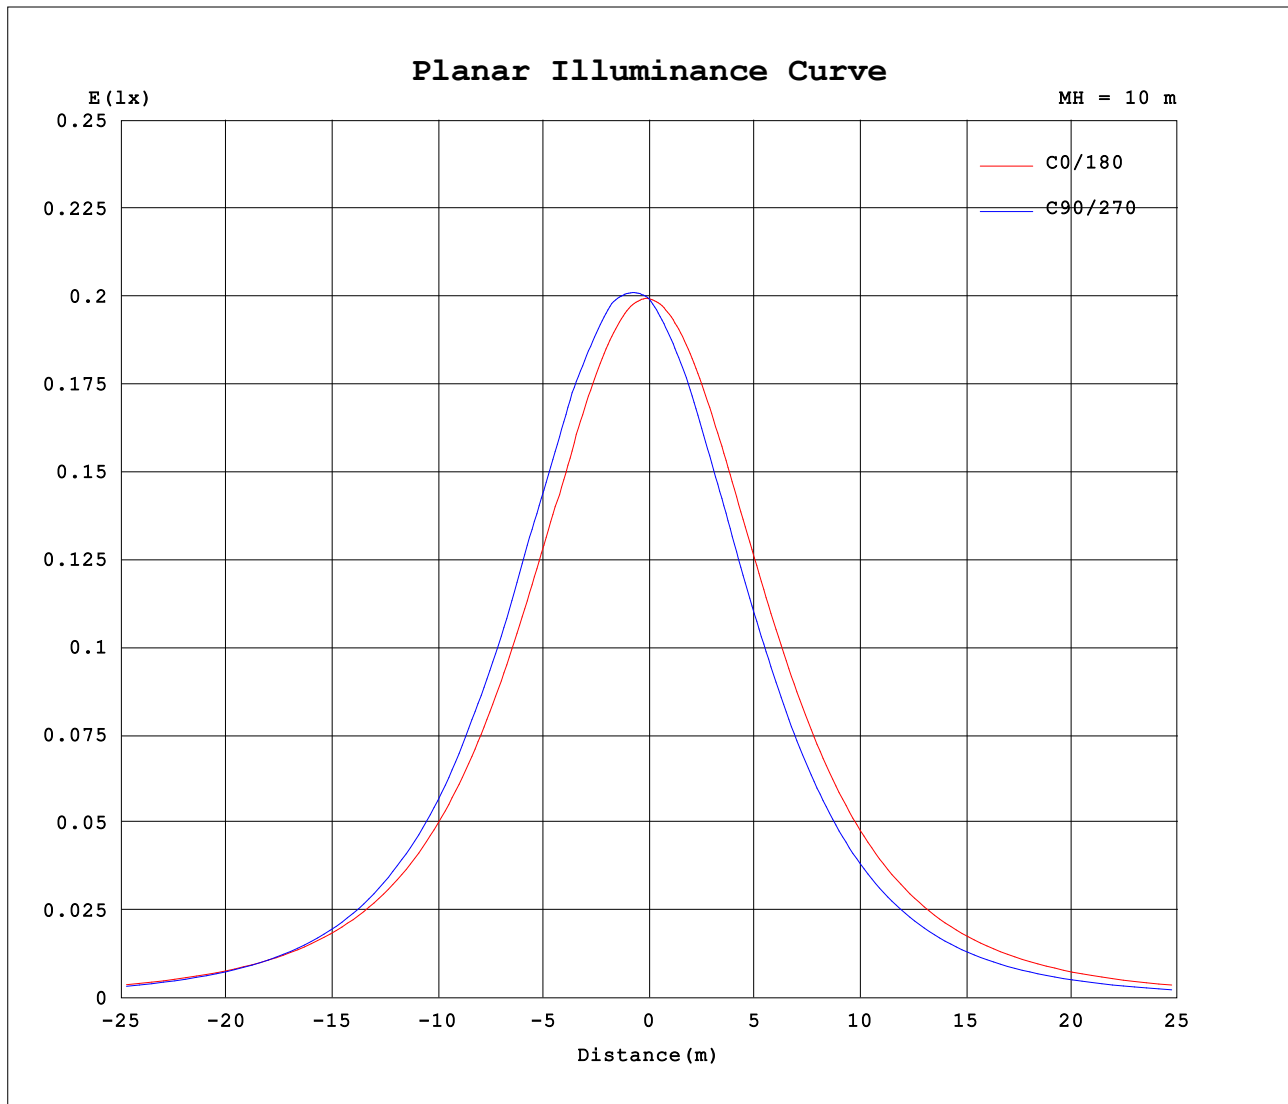

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:59.3579x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010030
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.90	0.83	1.26	1.79	2.16	2.23	2.28	2.28	2.28	2.28	2.24	2.17	2.09	2.00	1.92	1.86	1.81	1.79	1.79
-75	0.94	0.82	1.29	1.85	2.50	2.70	2.89	3.05	3.20	3.33	3.44	3.51	3.57	3.61	3.64	3.66	3.68	3.70	3.73
-70	0.81	1.04	1.70	2.58	3.01	3.33	3.64	3.93	4.21	4.47	4.70	4.90	5.09	5.24	5.37	5.48	5.57	5.64	5.68
-65	0.93	0.89	1.54	2.48	3.23	3.70	4.16	4.62	5.07	5.50	5.91	6.29	6.65	6.95	7.23	7.45	7.63	7.75	7.84
-60	0.69	1.25	2.12	3.24	3.82	4.44	5.04	5.66	6.28	6.88	7.44	7.97	8.46	8.89	9.28	9.57	9.80	9.95	10.0
-55	0.65	1.00	1.92	3.21	3.98	4.71	5.47	6.24	7.01	7.78	8.52	9.23	9.89	10.5	11.0	11.4	11.8	12.0	12.1
-50	0.72	1.52	2.64	3.87	4.71	5.59	6.51	7.43	8.37	9.29	10.2	11.0	11.8	12.5	13.1	13.6	14.0	14.2	14.3
-45	0.26	1.20	2.43	3.78	4.70	5.69	6.72	7.77	8.83	9.89	10.9	11.9	12.8	13.7	14.4	15.0	15.5	15.8	15.9
-40	0.73	1.71	3.48	4.41	5.48	6.60	7.77	8.95	10.1	11.3	12.5	13.5	14.5	15.4	16.2	16.8	17.3	17.6	17.7
-35	0.21	1.42	2.99	4.20	5.32	6.51	7.75	9.02	10.3	11.6	12.8	14.0	15.1	16.1	16.9	17.6	18.2	18.6	18.8
-30	0.80	2.14	3.72	4.86	6.10	7.40	8.75	10.1	11.5	12.8	14.1	15.3	16.4	17.4	18.3	18.9	19.5	19.8	19.9
-25	0.21	1.72	3.38	4.55	5.81	7.15	8.54	9.95	11.4	12.7	14.1	15.3	16.5	17.5	18.4	19.2	19.7	20.1	20.3
-20	0.87	2.77	3.95	5.21	6.57	7.99	9.45	10.9	12.4	13.8	15.1	16.3	17.4	18.4	19.2	19.9	20.4	20.7	20.8
-15	0.13	2.19	3.53	4.78	6.13	7.54	9.00	10.5	11.9	13.3	14.7	15.9	17.1	18.1	18.9	19.7	20.2	20.6	20.8
-10	1.07	2.91	4.09	5.40	6.81	8.26	9.75	11.2	12.6	14.0	15.3	16.5	17.6	18.5	19.3	19.9	20.4	20.7	20.7
-5	0.00	2.48	3.61	4.88	6.26	7.69	9.14	10.6	12.0	13.4	14.7	15.9	16.9	17.9	18.7	19.3	19.8	20.2	20.3
0	1.60	2.91	4.12	5.45	6.85	8.28	9.71	11.1	12.5	13.8	15.0	16.1	17.1	17.9	18.6	19.1	19.6	19.8	19.9
5	0.00	2.50	3.61	4.87	6.21	7.58	8.98	10.3	11.7	12.9	14.1	15.2	16.2	17.0	17.8	18.3	18.8	19.1	19.2
10	1.83	2.94	4.09	5.35	6.67	8.01	9.35	10.7	11.9	13.1	14.2	15.2	16.0	16.8	17.4	17.9	18.2	18.5	18.5
15	0.52	2.48	3.54	4.72	5.97	7.24	8.51	9.76	11.0	12.1	13.1	14.1	15.0	15.7	16.3	16.8	17.2	17.5	17.6
20	1.80	2.83	3.92	5.08	6.29	7.50	8.69	9.85	10.9	12.0	12.9	13.8	14.5	15.2	15.7	16.1	16.4	16.6	16.7
25	0.61	2.43	3.39	4.47	5.58	6.71	7.82	8.91	9.95	10.9	11.8	12.6	13.4	14.0	14.5	15.0	15.3	15.5	15.6
30	1.81	2.72	3.72	4.73	5.78	6.83	7.84	8.82	9.75	10.6	11.4	12.1	12.8	13.3	13.8	14.1	14.4	14.5	14.5
35	0.67	2.35	3.18	4.11	5.06	6.01	6.95	7.84	8.70	9.50	10.2	10.9	11.5	12.0	12.5	12.8	13.1	13.3	13.3
40	1.77	2.60	3.40	4.25	5.11	5.96	6.79	7.56	8.30	9.00	9.62	10.2	10.7	11.1	11.5	11.8	12.0	12.1	12.1
45	0.70	2.26	2.95	3.69	4.45	5.19	5.93	6.62	7.29	7.90	8.46	8.97	9.43	9.83	10.2	10.4	10.6	10.8	10.8
50	1.77	2.46	3.09	3.74	4.38	5.02	5.64	6.23	6.77	7.27	7.73	8.14	8.51	8.82	9.09	9.30	9.45	9.54	9.54
55	0.74	2.15	2.68	3.22	3.76	4.30	4.82	5.30	5.76	6.19	6.57	6.92	7.23	7.50	7.72	7.91	8.05	8.15	8.18
60	1.70	2.24	2.69	3.14	3.57	4.00	4.39	4.76	5.11	5.43	5.70	5.95	6.18	6.36	6.52	6.65	6.75	6.80	6.84
65	0.85	2.03	2.39	2.74	3.08	3.40	3.70	3.98	4.23	4.46	4.66	4.84	5.00	5.13	5.24	5.33	5.40	5.45	5.48
70	1.65	2.10	2.37	2.62	2.84	3.05	3.24	3.41	3.55	3.67	3.77	3.86	3.93	3.99	4.03	4.08	4.11	4.13	4.13
75	1.03	1.89	2.05	2.23	2.38	2.50	2.61	2.70	2.77	2.82	2.85	2.87	2.87	2.87	2.86	2.85	2.85	2.85	2.85
80	1.45	1.81	1.84	1.96	2.02	2.03	2.04	2.04	2.04	2.00	1.94	1.88	1.81	1.74	1.68	1.62	1.59	1.57	1.56
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:59.3579x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010030
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.80	1.87	1.98	2.10	2.23	2.36	2.47	2.56	2.63	2.68	2.69	2.70	2.66	2.57	1.98	1.50	1.06	1.34	
-75	3.74	3.76	3.80	3.84	3.87	3.88	3.88	3.84	3.78	3.68	3.56	3.41	3.24	3.03	2.62	1.84	1.16	1.07	
-70	5.68	5.68	5.66	5.60	5.52	5.42	5.26	5.07	4.85	4.59	4.30	3.99	3.66	3.30	2.51	1.69	1.06	1.03	
-65	7.86	7.86	7.80	7.68	7.50	7.27	6.98	6.64	6.26	5.84	5.39	4.91	4.43	3.93	3.42	2.32	1.42	1.01	
-60	10.0	10.0	9.86	9.62	9.30	8.91	8.44	7.92	7.34	6.74	6.10	5.45	4.80	4.16	3.39	2.06	1.17	1.02	
-55	12.1	12.1	11.9	11.6	11.3	10.8	10.2	9.53	8.80	8.05	7.24	6.44	5.64	4.84	4.07	2.93	1.69	0.93	
-50	14.2	14.1	13.8	13.4	12.8	12.2	11.4	10.6	9.67	8.72	7.75	6.78	5.83	4.90	4.02	2.57	1.30	0.44	
-45	16.0	15.9	15.6	15.2	14.6	13.9	13.1	12.1	11.1	10.0	8.92	7.81	6.72	5.66	4.64	3.58	1.96	0.90	
-40	17.7	17.5	17.1	16.5	15.8	14.9	13.9	12.8	11.7	10.4	9.20	7.96	6.75	5.59	4.49	3.46	1.58	0.30	
-35	18.8	18.6	18.3	17.8	17.1	16.3	15.3	14.1	12.8	11.6	10.3	8.94	7.62	6.34	5.12	3.99	2.54	0.91	
-30	19.8	19.6	19.2	18.6	17.8	16.8	15.7	14.4	13.1	11.7	10.3	8.85	7.45	6.10	4.83	3.64	1.87	0.32	
-25	20.3	20.2	19.8	19.3	18.6	17.7	16.6	15.4	14.0	12.7	11.2	9.73	8.26	6.84	5.47	4.20	3.01	0.96	
-20	20.8	20.6	20.1	19.5	18.7	17.8	16.6	15.3	13.9	12.4	10.9	9.42	7.91	6.46	5.07	3.79	2.52	0.27	
-15	20.8	20.6	20.3	19.8	19.1	18.2	17.1	15.9	14.6	13.2	11.7	10.1	8.62	7.12	5.67	4.32	3.09	1.22	
-10	20.7	20.5	20.1	19.5	18.7	17.8	16.7	15.5	14.1	12.7	11.2	9.65	8.12	6.62	5.17	3.82	2.64	0.00	
-5	20.3	20.2	19.9	19.4	18.7	17.9	16.9	15.8	14.5	13.1	11.7	10.2	8.69	7.19	5.73	4.35	3.09	1.58	
0	19.9	19.7	19.3	18.7	18.1	17.2	16.2	15.1	13.8	12.5	11.0	9.55	8.06	6.59	5.16	3.83	2.65	0.00	
5	19.2	19.1	18.8	18.3	17.7	17.0	16.1	15.1	13.9	12.7	11.3	9.93	8.50	7.06	5.65	4.30	3.07	1.80	
10	18.4	18.2	17.9	17.5	16.9	16.1	15.2	14.2	13.1	11.8	10.5	9.17	7.78	6.40	5.03	3.75	2.59	0.52	
15	17.6	17.5	17.2	16.8	16.3	15.7	14.9	14.0	13.0	11.9	10.6	9.38	8.07	6.75	5.44	4.18	3.01	1.87	
20	16.7	16.5	16.2	15.8	15.3	14.6	13.8	12.9	12.0	10.9	9.75	8.54	7.30	6.05	4.81	3.64	2.58	0.62	
25	15.6	15.5	15.3	14.9	14.5	13.9	13.3	12.5	11.6	10.7	9.64	8.56	7.42	6.27	5.10	3.97	2.91	1.86	
30	14.5	14.3	14.1	13.7	13.3	12.7	12.1	11.4	10.5	9.65	8.69	7.68	6.62	5.54	4.47	3.43	2.47	0.68	
35	13.3	13.2	13.1	12.8	12.4	12.0	11.4	10.8	10.1	9.30	8.46	7.56	6.62	5.65	4.67	3.70	2.79	1.84	
40	12.1	12.0	11.8	11.6	11.2	10.8	10.2	9.66	9.00	8.29	7.52	6.70	5.85	4.96	4.08	3.22	2.42	0.70	
45	10.8	10.8	10.6	10.4	10.1	9.79	9.37	8.89	8.35	7.76	7.11	6.42	5.69	4.92	4.14	3.37	2.62	1.82	
50	9.50	9.42	9.28	9.09	8.83	8.52	8.14	7.71	7.24	6.72	6.16	5.56	4.92	4.25	3.58	2.92	2.27	0.86	
55	8.18	8.15	8.07	7.93	7.74	7.51	7.23	6.90	6.54	6.13	5.69	5.21	4.69	4.15	3.59	3.02	2.46	1.81	
60	6.84	6.82	6.75	6.63	6.47	6.29	6.07	5.81	5.52	5.19	4.84	4.45	4.04	3.59	3.14	2.67	2.21	0.97	
65	5.48	5.48	5.44	5.37	5.29	5.17	5.05	4.89	4.70	4.48	4.24	3.97	3.68	3.35	3.01	2.65	2.28	1.78	
70	4.12	4.11	4.07	4.04	4.03	3.95	3.89	3.81	3.71	3.58	3.45	3.26	3.06	2.85	2.60	2.33	2.05	1.04	
75	2.85	2.85	2.86	2.87	2.91	2.92	2.94	2.95	2.94	2.92	2.86	2.79	2.71	2.60	2.47	2.30	2.12	1.71	
80	1.56	1.59	1.65	1.73	1.81	1.91	1.99	2.08	2.14	2.21	2.23	2.26	2.27	2.27	2.21	2.13	2.02	1.35	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks: