

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	339.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	160.5V x 177.3H
	At 50% of Imax	110.2V x 120.0H
	At 90% of Imax	49.3V x 50.1H

Beam Flux	Total	997.2 lumens per klm.
	To 10% of Imax	990.0 lumens per klm.
	To 50% of Imax	723.7 lumens per klm.
	To 90% of Imax	177.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.1297A P:3.113W PF:1.000 Lamp Flux:207.098x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010029
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

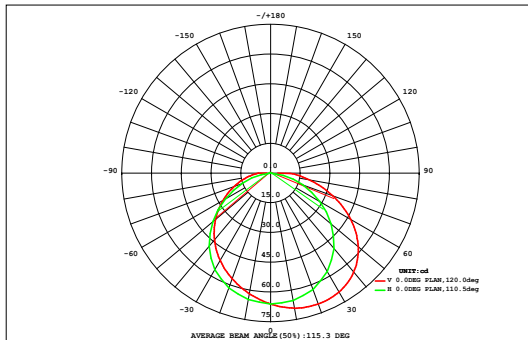

DATA OF LAMP		Eff:66.53lm/W	
MODELLS-COVE1-W40-8W-24V	Imax(cd)	70.24	
NOMINAL POWER(W)	3.1	AVAILABILITY(%)	99.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	206.2
NOMINAL FLUX(lm)	207.098	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	207.1
TEST VOLTAGE(V)	24	θ @50% (H,V)	120,110DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.02	0.07	0.13	0.19	0.24	0.29	0.32	0.34	0.36	0.38	0.40	0.40	0.39	0.36	0.29	0.21	0.12	0.04	4.55	4.54
70	0.02	0.07	0.15	0.24	0.34	0.44	0.54	0.62	0.67	0.71	0.71	0.67	0.60	0.50	0.37	0.24	0.12	0.03	7.05	7.04
60	0.02	0.09	0.19	0.32	0.47	0.63	0.79	0.92	1.01	1.06	1.05	0.99	0.87	0.70	0.50	0.31	0.14	0.03	10.1	10.1
50	0.02	0.10	0.22	0.39	0.60	0.81	1.02	1.20	1.33	1.39	1.38	1.29	1.13	0.89	0.63	0.37	0.16	0.04	13.0	13.0
40	0.02	0.11	0.26	0.46	0.70	0.97	1.22	1.43	1.59	1.67	1.66	1.55	1.35	1.07	0.74	0.42	0.18	0.04	15.4	15.4
30	0.02	0.12	0.28	0.51	0.79	1.08	1.36	1.60	1.77	1.87	1.86	1.75	1.52	1.20	0.83	0.47	0.20	0.04	17.3	17.3
	0.03	0.12	0.30	0.55	0.84	1.16	1.45	1.70	1.89	1.99	1.99	1.87	1.63	1.29	0.89	0.50	0.21	0.04	18.4	18.4
	0.03	0.13	0.31	0.56	0.87	1.19	1.49	1.74	1.94	2.05	2.05	1.92	1.68	1.33	0.92	0.52	0.21	0.04	19.0	19.0
	0.03	0.12	0.30	0.56	0.86	1.18	1.48	1.73	1.93	2.04	2.04	1.92	1.67	1.33	0.92	0.52	0.21	0.04	18.9	18.9
	0.02	0.12	0.29	0.53	0.83	1.13	1.42	1.67	1.86	1.97	1.97	1.85	1.62	1.28	0.88	0.50	0.21	0.04	18.2	18.2
	0.02	0.11	0.27	0.50	0.76	1.05	1.33	1.56	1.74	1.84	1.84	1.72	1.50	1.19	0.82	0.47	0.20	0.04	17.0	17.0
-30	0.02	0.10	0.24	0.44	0.67	0.93	1.18	1.39	1.55	1.64	1.63	1.53	1.33	1.05	0.73	0.43	0.19	0.04	15.1	15.1
-40	0.02	0.09	0.21	0.37	0.56	0.77	0.97	1.15	1.28	1.35	1.35	1.26	1.10	0.88	0.62	0.37	0.17	0.03	12.6	12.5
-50	0.01	0.08	0.17	0.30	0.44	0.59	0.73	0.86	0.95	1.01	1.01	0.95	0.84	0.68	0.50	0.31	0.14	0.02	9.60	9.58
-60	0.01	0.06	0.14	0.22	0.31	0.40	0.48	0.55	0.61	0.65	0.65	0.63	0.57	0.48	0.37	0.24	0.12	0.02	6.52	6.49
-70	0.01	0.05	0.10	0.15	0.19	0.22	0.25	0.27	0.29	0.31	0.32	0.33	0.32	0.30	0.25	0.18	0.09	0.02	3.63	3.35
-80	0.00	0.02	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.04	0.05	0.07	0.08	0.09	0.08	0.07	0.04	0.01	0.85	0.30
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.33	1.58	3.61	6.33	9.53	12.9	16.1	18.8	20.8	22.0	22.0	20.7	18.2	14.6	10.3	6.13	2.71	0.56	207	---
Φ a	0.24	1.51	3.56	6.27	9.46	12.8	16.0	18.7	20.7	21.9	21.9	20.7	18.2	14.6	10.3	6.13	2.70	0.53	---	206

one-half-peak spread: U:54.7,D:56.1 , L:72.8,R:46.9


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.1297A P:3.113W PF:1.000 Lamp Flux:207.098x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010029
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

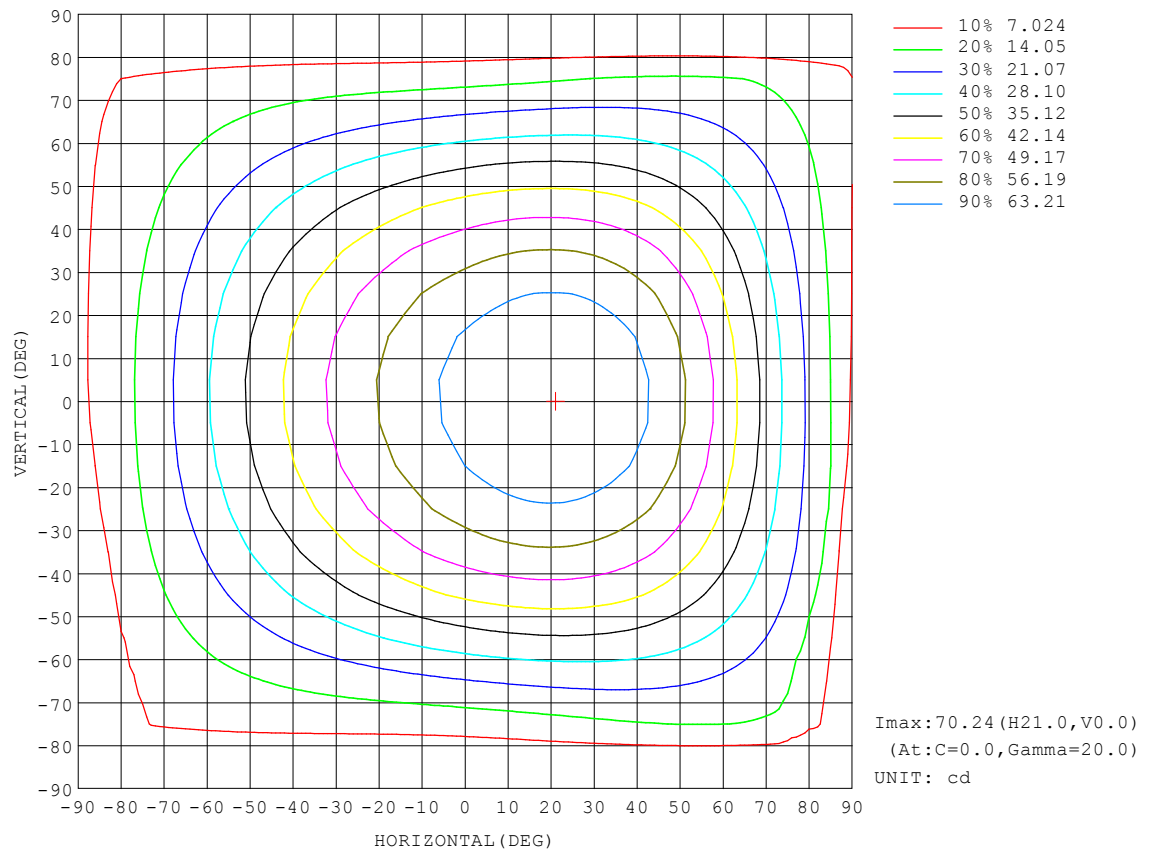


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.1297A P:3.113W PF:1.000 Lamp Flux:207.098x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010029
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

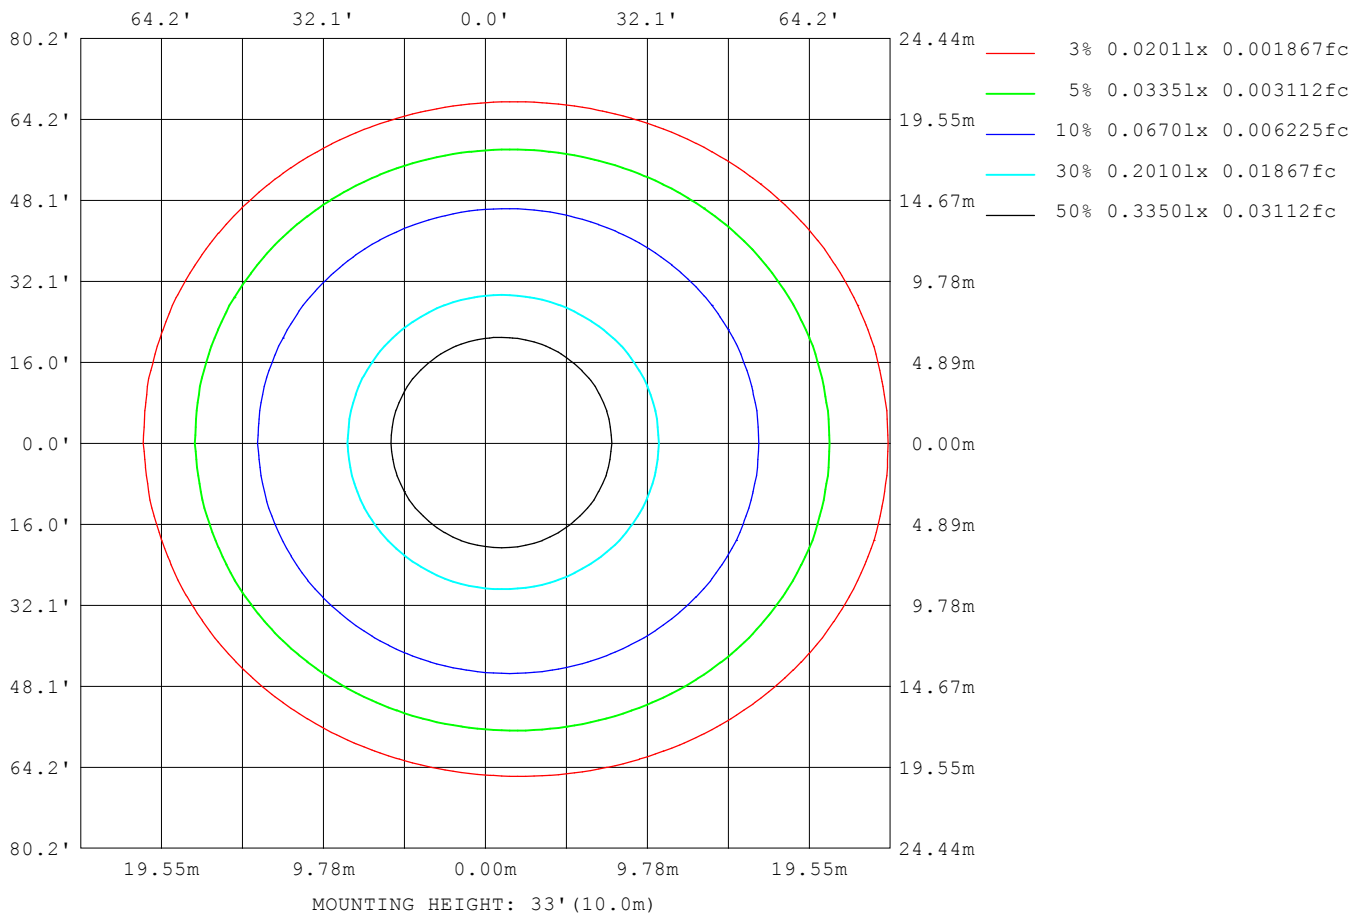


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.1297A P:3.113W PF:1.000 Lamp Flux:207.098x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010029
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

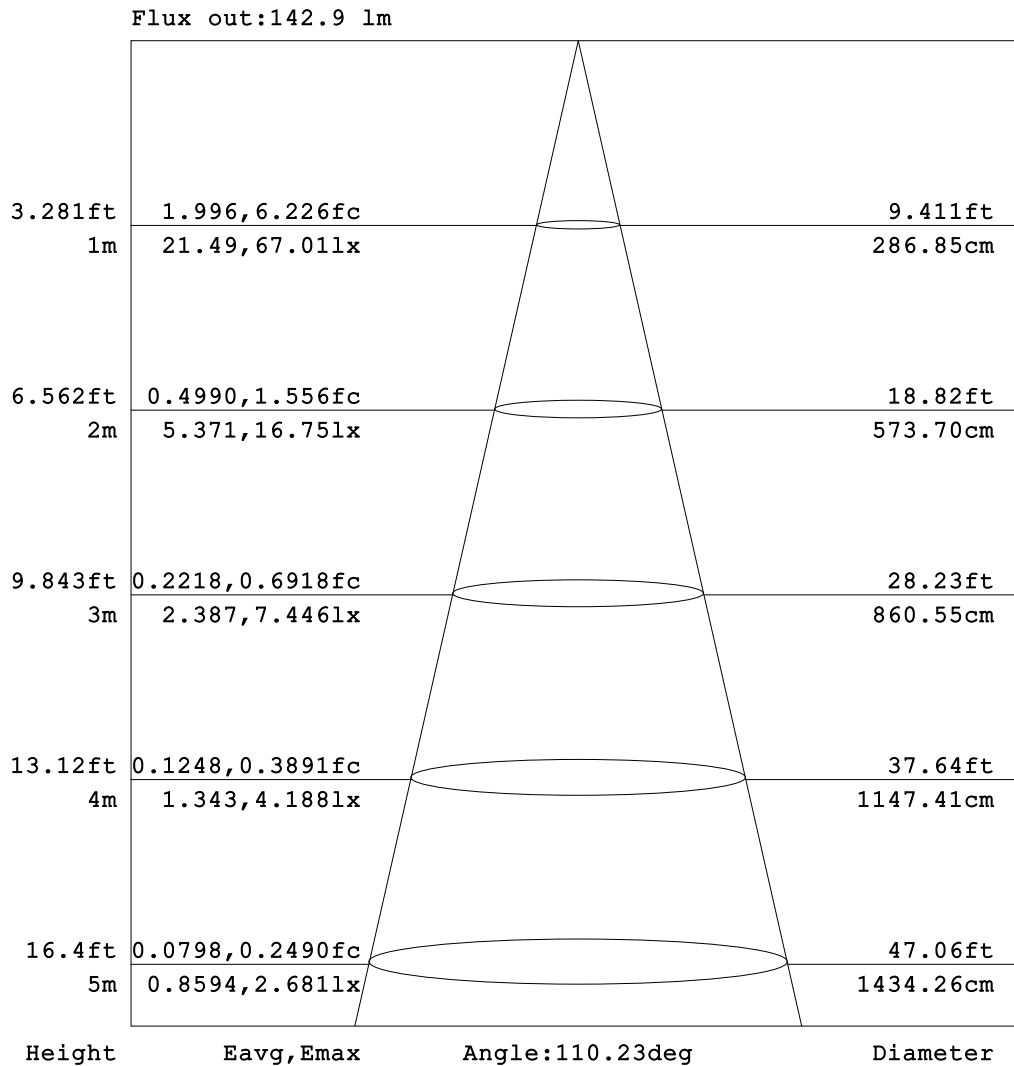


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

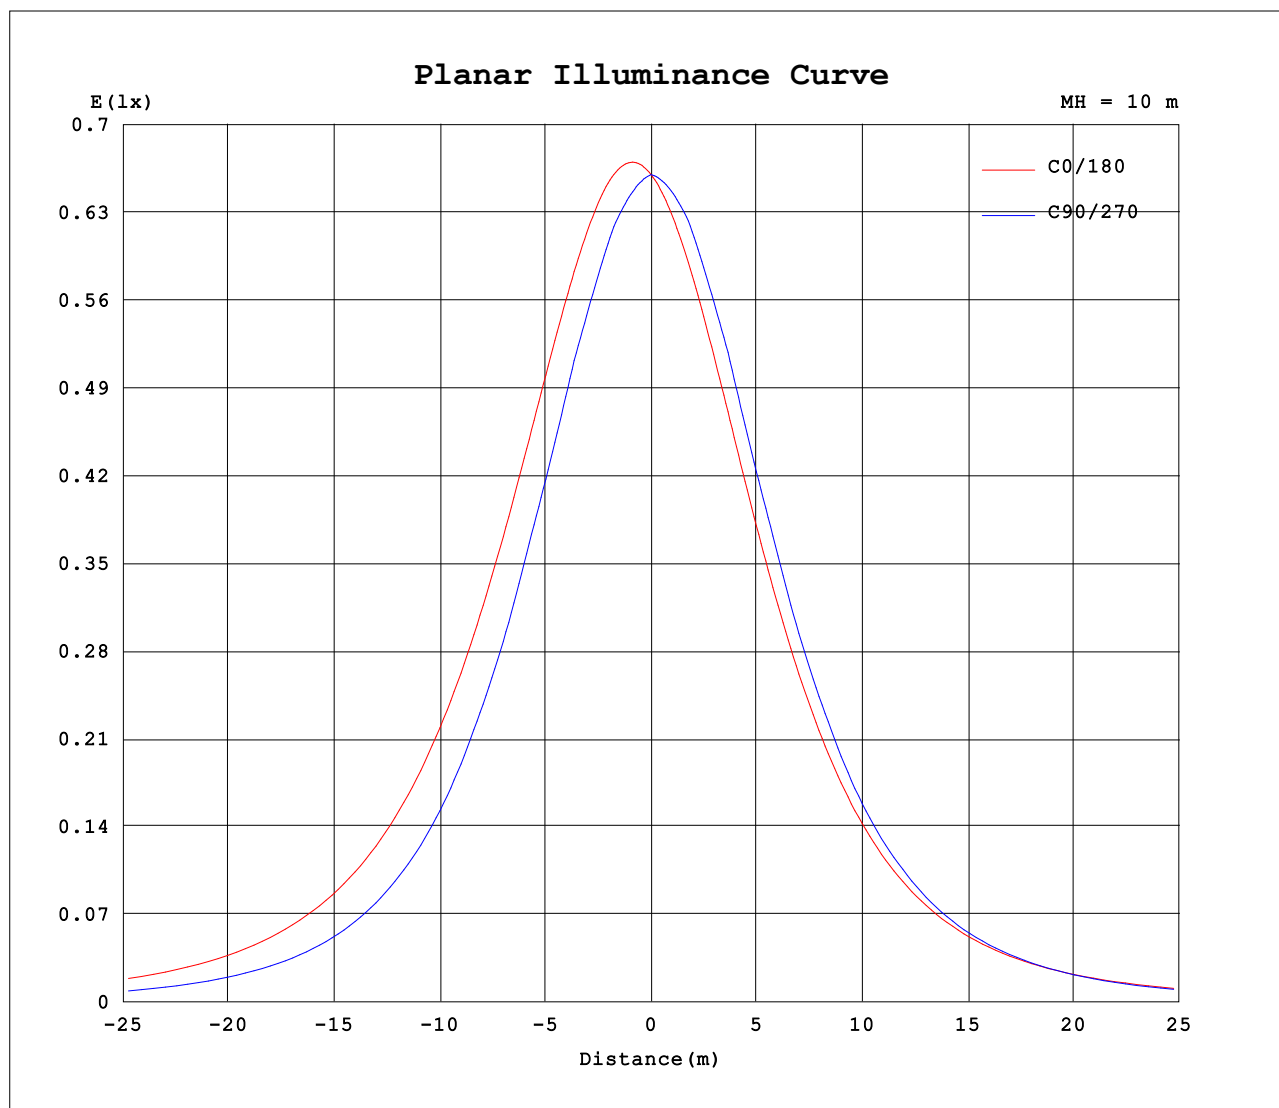

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1297A P:3.113W PF:1.000 Lamp Flux:207.098x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010029
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	3.30	2.86	3.98	5.16	6.54	6.62	6.63	6.61	6.47	6.29	6.06	5.80	5.53	5.27	5.02	4.83	4.73	4.71	4.81
-75	3.13	3.00	4.32	6.02	7.56	7.93	8.25	8.52	8.71	8.85	8.95	9.02	9.07	9.12	9.19	9.28	9.44	9.63	9.90
-70	2.96	3.14	4.67	6.88	8.57	9.25	9.87	10.4	10.9	11.4	11.8	12.2	12.6	13.0	13.3	13.7	14.1	14.6	15.0
-65	2.93	3.27	5.50	8.15	9.64	10.7	11.6	12.6	13.5	14.4	15.2	16.0	16.7	17.5	18.2	18.9	19.5	20.2	20.8
-60	2.89	3.41	6.34	9.41	10.7	12.1	13.4	14.7	16.0	17.3	18.5	19.7	20.8	22.0	23.0	24.0	24.9	25.8	26.5
-55	2.40	3.96	6.78	10.1	11.7	13.5	15.2	16.9	18.6	20.3	21.9	23.5	25.0	26.4	27.8	29.1	30.3	31.4	32.3
-50	1.92	4.50	7.21	10.8	12.8	14.9	17.0	19.1	21.2	23.2	25.3	27.2	29.1	30.9	32.6	34.2	35.7	37.0	38.1
-45	1.91	4.69	8.47	11.5	13.8	16.3	18.7	21.1	23.6	26.0	28.4	30.7	32.9	35.0	37.0	38.8	40.5	42.0	43.2
-40	1.90	4.88	9.72	12.3	14.9	17.6	20.4	23.2	26.1	28.9	31.6	34.2	36.8	39.2	41.4	43.5	45.4	47.0	48.4
-35	1.92	5.39	10.1	12.9	15.7	18.8	21.8	24.9	28.1	31.1	34.2	37.0	39.8	42.4	44.8	47.0	49.1	50.9	52.4
-30	1.93	5.91	10.5	13.5	16.6	19.9	23.2	26.7	30.1	33.4	36.7	39.8	42.8	45.6	48.2	50.6	52.8	54.7	56.4
-25	1.95	6.83	10.9	14.0	17.4	20.9	24.5	28.1	31.7	35.3	38.7	41.9	45.0	47.9	50.5	53.0	55.2	57.2	59.0
-20	1.96	7.74	11.3	14.6	18.1	21.9	25.7	29.6	33.4	37.1	40.7	44.1	47.2	50.2	52.9	55.4	57.7	59.8	61.7
-15	1.97	8.09	11.4	14.9	18.5	22.4	26.4	30.4	34.3	38.2	41.9	45.3	48.5	51.5	54.2	56.8	59.1	61.3	63.2
-10	1.98	8.43	11.6	15.1	18.9	22.9	27.0	31.2	35.3	39.2	43.0	46.5	49.8	52.8	55.6	58.1	60.5	62.8	64.8
-5	1.98	8.50	11.7	15.3	19.2	23.3	27.4	31.6	35.8	39.8	43.6	47.1	50.4	53.4	56.2	58.8	61.2	63.4	65.4
0	1.98	8.57	11.9	15.6	19.5	23.6	27.9	32.1	36.3	40.3	44.1	47.7	50.9	53.9	56.8	59.4	61.8	64.0	66.0
5	3.01	8.57	11.8	15.5	19.3	23.4	27.6	31.8	36.0	40.0	43.8	47.4	50.7	53.7	56.5	59.1	61.5	63.7	65.6
10	4.05	8.56	11.8	15.4	19.2	23.2	27.4	31.6	35.8	39.8	43.6	47.1	50.4	53.4	56.2	58.8	61.2	63.3	65.3
15	4.12	8.52	11.7	15.2	18.9	22.8	26.9	31.0	35.0	38.9	42.6	46.1	49.3	52.3	55.1	57.6	59.9	62.0	63.9
20	4.20	8.48	11.6	15.0	18.6	22.4	26.4	30.3	34.2	38.1	41.7	45.1	48.3	51.2	54.0	56.4	58.7	60.7	62.5
25	4.23	8.36	11.3	14.5	17.9	21.6	25.3	29.0	32.7	36.4	39.9	43.1	46.2	49.1	51.7	54.1	56.3	58.2	59.9
30	4.27	8.24	11.0	14.0	17.3	20.7	24.2	27.7	31.2	34.7	38.0	41.1	44.1	46.9	49.5	51.8	53.9	55.7	57.3
35	4.26	8.08	10.6	13.5	16.5	19.6	22.8	26.1	29.3	32.5	35.6	38.5	41.3	43.9	46.3	48.4	50.3	52.0	53.5
40	4.24	7.92	10.3	12.9	15.7	18.6	21.5	24.5	27.4	30.4	33.2	35.9	38.4	40.8	43.0	45.0	46.8	48.4	49.8
45	4.25	7.73	9.88	12.2	14.7	17.2	19.8	22.4	25.1	27.6	30.1	32.5	34.8	36.9	38.8	40.6	42.2	43.6	44.8
50	4.26	7.54	9.45	11.5	13.6	15.9	18.1	20.4	22.7	24.9	27.0	29.1	31.1	32.9	34.6	36.2	37.6	38.9	39.9
55	4.26	7.33	8.99	10.8	12.6	14.4	16.3	18.2	20.1	21.9	23.7	25.4	27.0	28.5	29.9	31.2	32.4	33.4	34.3
60	4.25	7.11	8.52	9.99	11.5	12.9	14.5	16.0	17.5	18.9	20.3	21.6	22.9	24.1	25.2	26.2	27.1	27.9	28.6
65	4.29	6.91	8.05	9.23	10.4	11.5	12.7	13.8	14.9	15.9	16.9	17.9	18.8	19.6	20.4	21.1	21.7	22.4	22.9
70	4.32	6.70	7.58	8.46	9.31	10.1	10.9	11.6	12.3	12.9	13.5	14.1	14.6	15.1	15.5	16.0	16.4	16.8	17.2
75	4.28	6.39	7.02	7.63	8.17	8.67	9.13	9.52	9.86	10.2	10.4	10.6	10.8	10.9	11.1	11.2	11.4	11.6	11.9
80	4.24	6.08	6.47	6.79	7.04	7.22	7.35	7.40	7.40	7.37	7.34	7.12	6.94	6.76	6.58	6.47	6.41	6.41	6.53
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1297A P:3.113W PF:1.000 Lamp Flux:207.098x1 lm																		
NAME: LLS-COVE1-W40-8W-24V-G									TYPE:LED					WEIGHT:				
DIM.:									SPEC.:					SERIAL No.:202010029				
MFR.: 中山市泰然光电科技有限公司									SUR.:					PROTECTION ANGLE:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	5.08	5.47	5.98	6.58	7.23	7.93	8.64	9.34	9.98	10.5	11.0	11.3	11.5	11.5	9.39	7.41	5.30	6.28	
-75	10.3	10.7	11.2	11.7	12.2	12.7	13.2	13.6	13.9	14.1	14.2	14.1	13.8	13.4	11.4	8.01	5.49	5.77	
-70	15.4	15.9	16.3	16.8	17.2	17.5	17.8	17.9	17.9	17.7	17.4	16.9	16.1	15.2	13.5	8.60	5.68	5.26	
-65	21.3	21.8	22.3	22.6	22.9	23.1	23.1	22.9	22.5	21.9	21.0	20.0	18.6	17.1	15.1	10.1	5.96	5.26	
-60	27.2	27.8	28.2	28.5	28.6	28.6	28.4	27.9	27.1	26.0	24.7	23.0	21.2	19.1	16.8	11.7	6.23	5.26	
-55	33.1	33.7	34.2	34.4	34.5	34.2	33.8	32.9	31.7	30.2	28.4	26.2	23.7	21.0	18.2	12.6	7.32	4.45	
-50	39.0	39.7	40.2	40.4	40.3	39.8	39.1	38.0	36.4	34.4	32.1	29.3	26.3	23.0	19.6	13.6	8.40	3.64	
-45	44.3	45.1	45.6	45.8	45.6	45.0	44.1	42.6	40.7	38.3	35.4	32.2	28.5	24.7	20.7	15.5	8.66	3.55	
-40	49.6	50.4	51.0	51.2	50.9	50.2	49.0	47.3	45.0	42.2	38.8	35.0	30.8	26.4	21.9	17.5	8.91	3.47	
-35	53.7	54.6	55.2	55.4	55.1	54.4	53.1	51.2	48.7	45.5	41.8	37.5	32.8	27.9	22.9	18.1	10.8	3.43	
-30	57.9	58.9	59.5	59.6	59.3	58.5	57.1	55.1	52.3	48.8	44.7	40.0	34.8	29.4	24.0	18.7	12.6	3.38	
-25	60.6	61.7	62.4	62.6	62.3	61.5	60.0	57.8	54.9	51.2	46.8	41.8	36.3	30.5	24.7	19.0	13.3	3.39	
-20	63.3	64.5	65.3	65.5	65.3	64.4	62.8	60.6	57.5	53.6	48.9	43.5	37.7	31.5	25.3	19.3	14.0	3.40	
-15	64.9	66.2	67.0	67.2	67.0	66.2	64.6	62.4	59.2	55.2	50.3	44.7	38.7	32.2	25.8	19.7	14.1	3.37	
-10	66.5	67.9	68.7	69.0	68.7	67.9	66.4	64.1	60.9	56.8	51.7	46.0	39.6	33.0	26.3	20.0	14.2	3.34	
-5	67.2	68.5	69.3	69.6	69.4	68.5	67.0	64.7	61.4	57.3	52.2	46.3	39.9	33.1	26.4	19.9	14.1	3.52	
0	67.8	69.1	70.0	70.2	70.0	69.2	67.6	65.2	61.9	57.7	52.6	46.7	40.1	33.2	26.4	19.9	14.1	3.70	
5	67.4	68.7	69.5	69.8	69.6	68.7	67.2	64.8	61.6	57.4	52.3	46.4	39.9	33.1	26.3	19.9	14.0	5.03	
10	66.9	68.3	69.1	69.4	69.1	68.3	66.8	64.5	61.3	57.1	51.9	46.0	39.6	32.9	26.2	19.8	14.0	6.36	
15	65.5	66.7	67.5	67.8	67.6	66.8	65.3	62.9	59.8	55.6	50.6	44.9	38.6	32.1	25.6	19.4	13.8	6.48	
20	64.0	65.2	66.0	66.3	66.1	65.2	63.7	61.4	58.2	54.2	49.2	43.7	37.7	31.3	25.1	19.0	13.7	6.60	
25	61.3	62.4	63.2	63.4	63.2	62.4	60.9	58.7	55.7	51.8	47.2	41.9	36.2	30.2	24.3	18.6	13.5	6.65	
30	58.6	59.7	60.3	60.5	60.3	59.5	58.1	56.0	53.1	49.4	45.1	40.1	34.7	29.1	23.6	18.2	13.3	6.71	
35	54.8	55.7	56.3	56.4	56.2	55.4	54.1	52.1	49.4	46.1	42.1	37.6	32.7	27.6	22.5	17.6	13.0	6.71	
40	50.9	51.7	52.2	52.3	52.1	51.3	50.1	48.2	45.7	42.7	39.1	35.1	30.7	26.0	21.4	16.9	12.8	6.72	
45	45.8	46.5	47.0	47.1	46.8	46.2	45.2	43.6	41.4	38.8	35.8	32.2	28.4	24.3	20.2	16.2	12.5	6.90	
50	40.8	41.4	41.8	41.8	41.6	41.1	40.2	38.9	37.2	35.0	32.4	29.4	26.1	22.7	19.1	15.5	12.2	7.08	
55	35.0	35.6	35.9	36.0	35.9	35.6	34.9	33.9	32.5	30.8	28.7	26.3	23.6	20.7	17.7	14.7	11.8	7.14	
60	29.2	29.7	30.0	30.2	30.2	30.0	29.6	28.9	27.9	26.6	25.1	23.2	21.1	18.8	16.4	13.9	11.5	7.20	
65	23.4	23.8	24.2	24.4	24.5	24.5	24.3	24.0	23.4	22.6	21.5	20.2	18.7	16.9	15.0	13.1	11.1	7.14	
70	17.6	17.9	18.3	18.6	18.8	19.0	19.1	19.0	18.8	18.5	17.9	17.2	16.2	15.0	13.7	12.3	10.8	7.08	
75	12.2	12.5	12.9	13.3	13.7	14.1	14.4	14.7	14.9	14.9	14.8	14.5	14.0	13.3	12.5	11.6	10.5	7.23	
80	6.77	7.12	7.53	8.04	8.61	9.21	9.80	10.4	10.9	11.3	11.6	11.7	11.8	11.6	11.3	10.8	10.2	7.39	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks: