

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	363.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	155.7V x 175.4H
	At 50% of Imax	103.9V x 109.6H
	At 90% of Imax	43.6V x 47.5H

Beam Flux	Total	997.9 lumens per klm.
	To 10% of Imax	988.2 lumens per klm.
	To 50% of Imax	690.2 lumens per klm.
	To 90% of Imax	164.6 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.1054A P:2.530W PF:1.000 Lamp Flux:97.5712x1 lm		
NAME: LLS-COVE1-W40-8W-24V-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010028
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

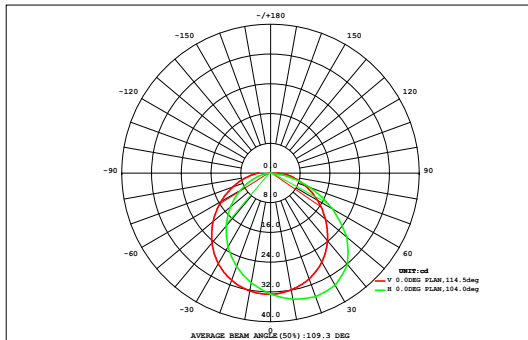

DATA OF LAMP		Eff:38.56lm/W	
MODELLS-COVE1-W40-8W-24V		Imax (cd)	35.41
NOMINAL POWER (W)	2.5	AVAILABILITY (%)	99.1
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	96.74
NOMINAL FLUX (lm)	97.5712	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	97.55
TEST VOLTAGE (V)	24	θ @50% (H,V)	110,104DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.55	2.55
80	0.01	0.04	0.07	0.11	0.15	0.18	0.21	0.23	0.24	0.24	0.23	0.22	0.20	0.16	0.12	0.08	0.04	0.01	4.15	4.14
70	0.01	0.04	0.08	0.15	0.22	0.30	0.37	0.42	0.45	0.46	0.43	0.38	0.31	0.23	0.15	0.09	0.04	0.01	6.02	6.02
60	0.01	0.05	0.11	0.19	0.31	0.43	0.54	0.64	0.69	0.70	0.65	0.56	0.45	0.32	0.20	0.11	0.05	0.01	7.64	7.64
50	0.01	0.05	0.13	0.24	0.38	0.54	0.70	0.82	0.89	0.90	0.84	0.72	0.56	0.40	0.25	0.13	0.06	0.01	8.75	8.74
40	0.01	0.06	0.14	0.28	0.44	0.63	0.81	0.95	1.02	1.02	0.95	0.82	0.64	0.45	0.28	0.15	0.06	0.01	9.26	9.26
30	0.01	0.06	0.16	0.30	0.48	0.68	0.86	1.00	1.07	1.07	1.00	0.86	0.68	0.49	0.31	0.16	0.07	0.01	9.31	9.31
20	0.01	0.06	0.16	0.31	0.49	0.69	0.86	0.99	1.06	1.06	0.99	0.86	0.69	0.50	0.32	0.17	0.07	0.01	9.02	9.02
10	0.01	0.06	0.16	0.31	0.48	0.67	0.83	0.95	1.02	1.01	0.95	0.84	0.67	0.49	0.31	0.17	0.07	0.01	8.48	8.48
0	0.01	0.06	0.15	0.27	0.42	0.57	0.71	0.81	0.86	0.86	0.81	0.71	0.58	0.43	0.28	0.16	0.07	0.01	7.75	7.75
-10	0.01	0.06	0.13	0.24	0.37	0.50	0.62	0.71	0.75	0.75	0.71	0.63	0.51	0.38	0.25	0.14	0.06	0.01	6.84	6.84
-20	0.01	0.05	0.12	0.21	0.31	0.42	0.52	0.59	0.63	0.63	0.59	0.53	0.43	0.33	0.22	0.13	0.06	0.01	5.78	5.78
-30	0.01	0.04	0.10	0.17	0.25	0.34	0.41	0.46	0.49	0.50	0.47	0.42	0.35	0.27	0.18	0.11	0.05	0.01	4.63	4.62
-40	0.01	0.04	0.08	0.14	0.19	0.25	0.30	0.34	0.36	0.36	0.34	0.31	0.26	0.20	0.14	0.09	0.04	0.01	3.45	3.44
-50	0.01	0.03	0.06	0.10	0.13	0.17	0.19	0.21	0.22	0.23	0.22	0.20	0.18	0.14	0.11	0.07	0.03	0.01	2.32	2.30
-60	0.00	0.02	0.05	0.07	0.08	0.09	0.10	0.10	0.11	0.11	0.11	0.10	0.10	0.09	0.07	0.05	0.03	0.01	1.29	0.86
-70	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.30	0.00
-80	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.30	0.00
-90	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.30	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	
Φ t	0.16	0.80	1.89	3.39	5.20	7.10	8.82	10.1	10.8	10.8	10.2	8.97	7.28	5.37	3.55	2.01	0.87	0.18	98	---
Φ a	0.12	0.77	1.85	3.35	5.15	7.05	8.77	10.1	10.8	10.8	10.1	8.92	7.23	5.33	3.51	1.99	0.84	0.15	---	97

one-half-peak spread: U:62.4,D:42.1 , L:55.3,R:55.0


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.1054A P:2.530W PF:1.000 Lamp Flux:97.5712x1 lm		
NAME: LLS-COVE1-W40-8W-24V-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010028
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

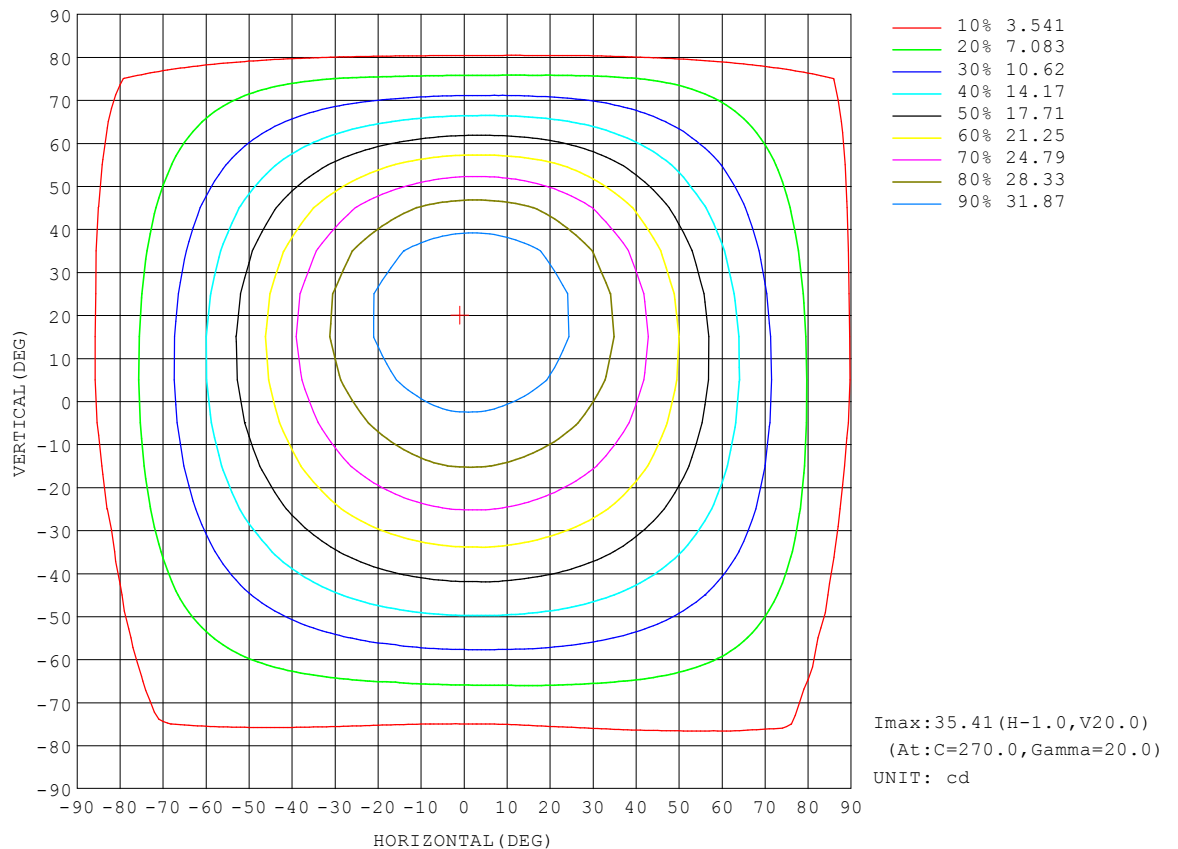


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.1054A P:2.530W PF:1.000 Lamp Flux:97.5712x1 lm		
NAME: LLS-COVE1-W40-8W-24V-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010028
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

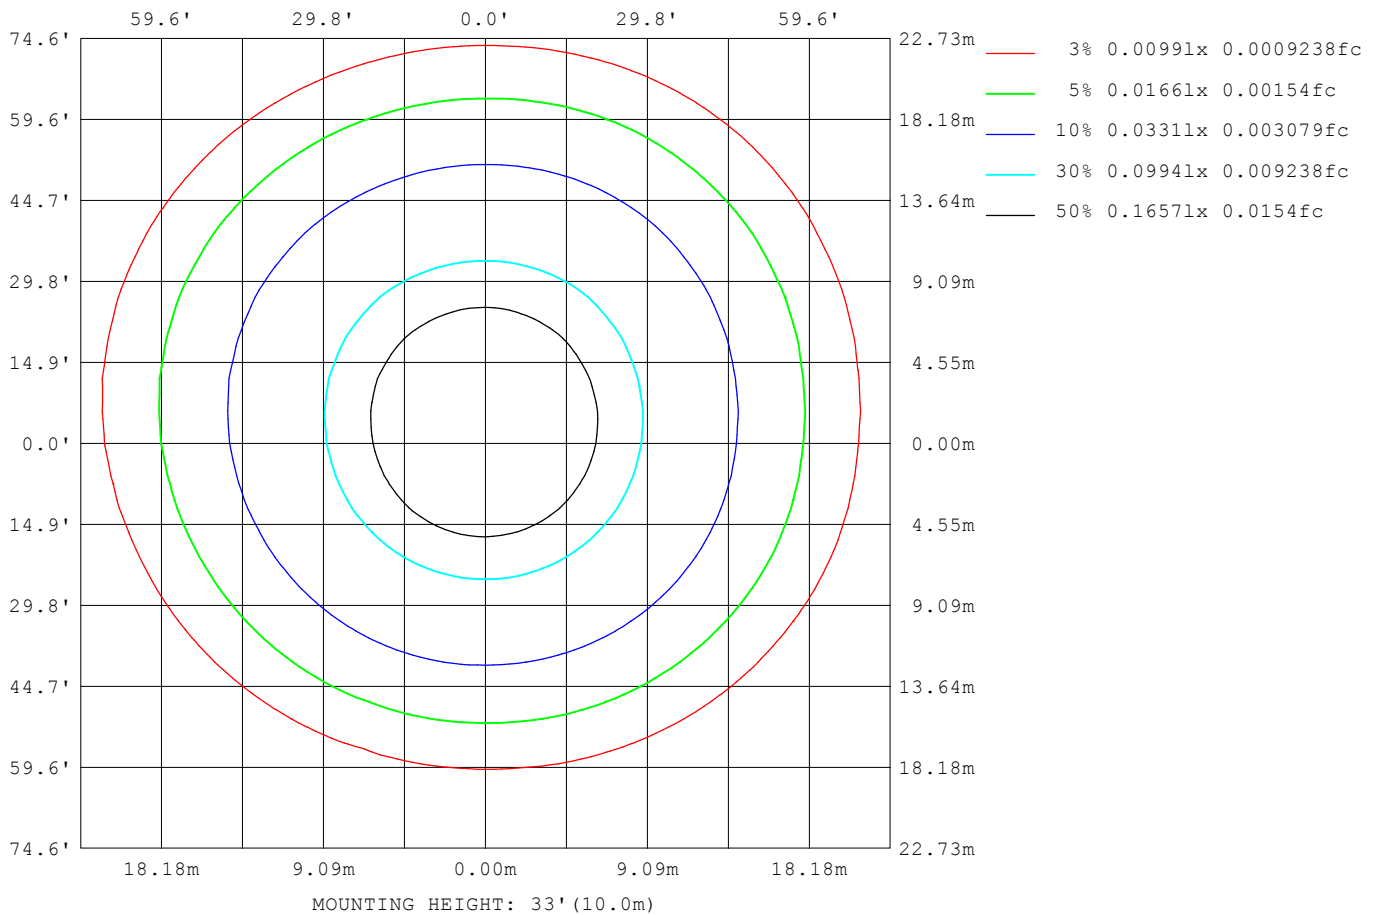


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.1054A P:2.530W PF:1.000 Lamp Flux:97.5712x1 lm		
NAME: LLS-COVE1-W40-8W-24V-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010028
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

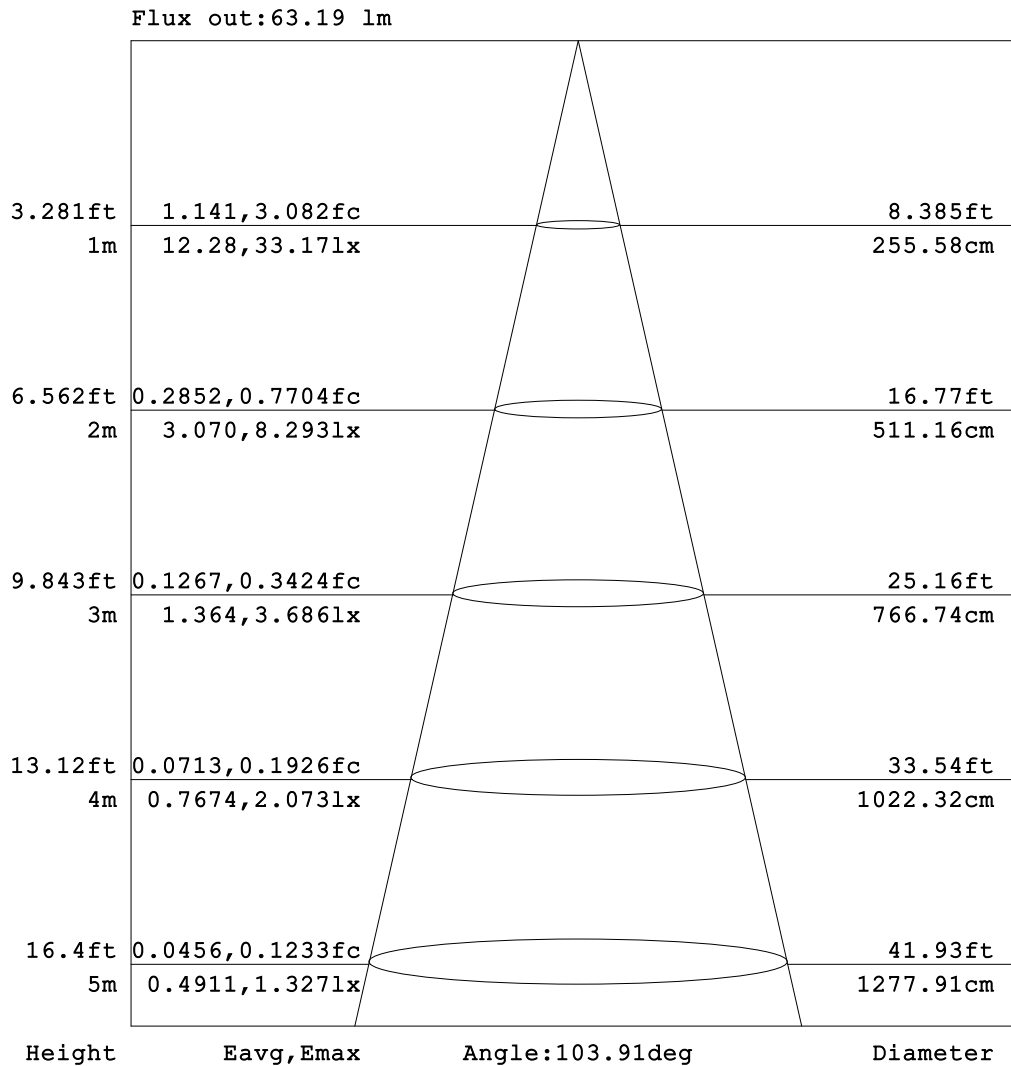


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

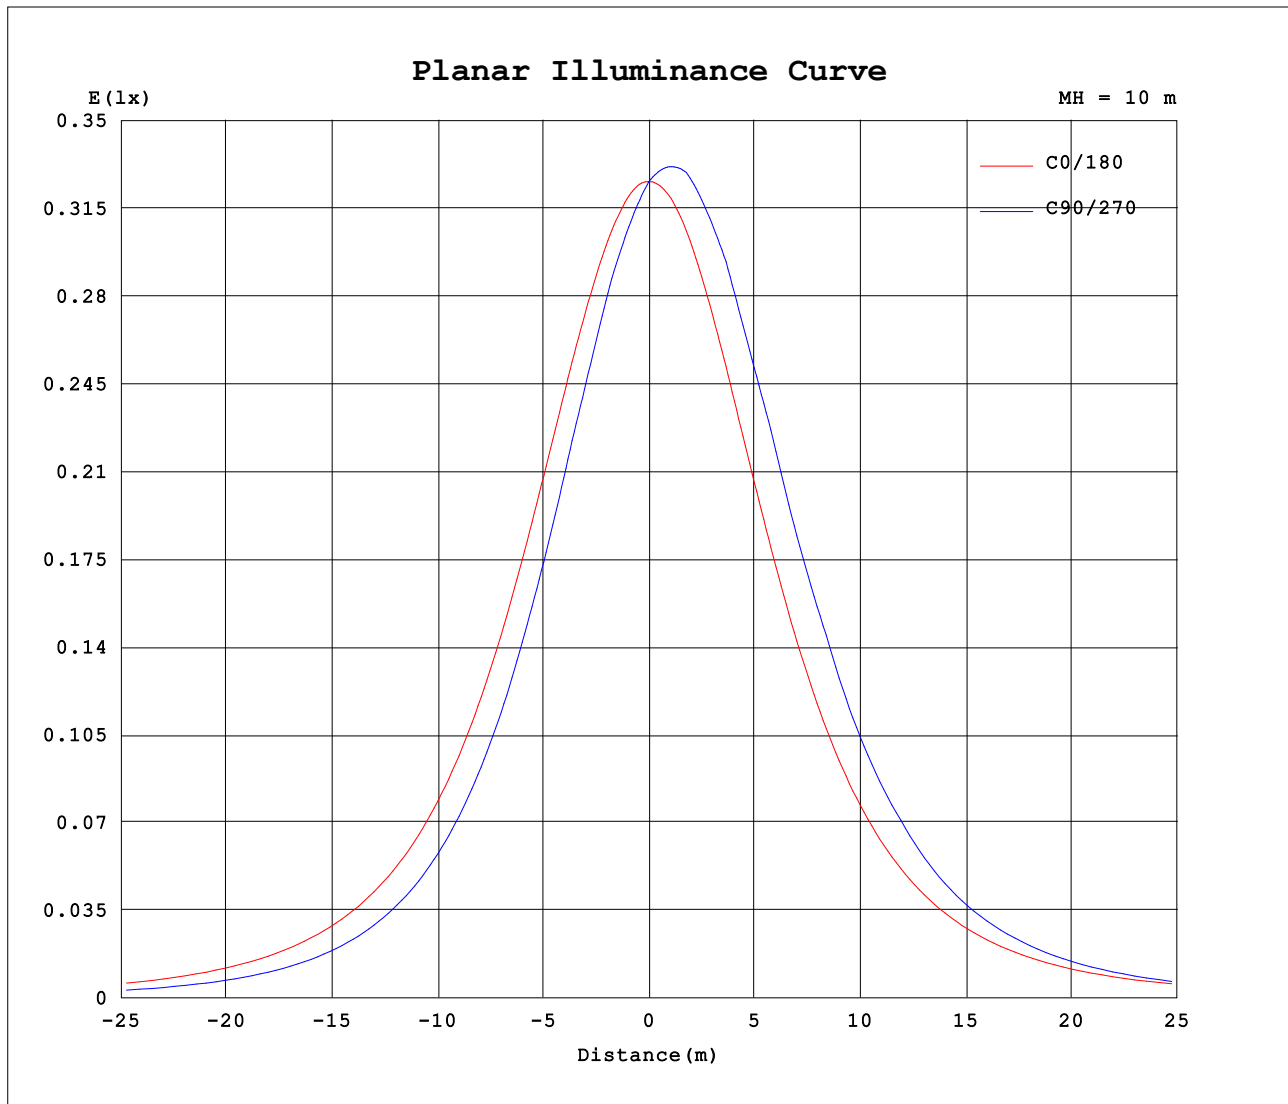

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1054A P:2.530W PF:1.000 Lamp Flux:97.5712x1 lm		
NAME: LLS-COVE1-W40-8W-24V-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010028
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.45	1.38	2.01	2.74	3.03	3.04	3.01	2.93	2.83	2.70	2.56	2.41	2.25	2.10	1.96	1.85	1.76	1.72	1.72
-75	1.60	1.31	1.95	2.67	3.49	3.63	3.75	3.81	3.85	3.86	3.85	3.81	3.76	3.71	3.65	3.59	3.55	3.53	3.53
-70	1.28	1.76	2.71	3.82	4.11	4.36	4.56	4.74	4.89	5.01	5.09	5.16	5.21	5.25	5.27	5.29	5.31	5.34	5.37
-65	1.64	1.43	2.24	3.44	4.41	4.83	5.23	5.57	5.89	6.18	6.43	6.65	6.84	7.01	7.14	7.22	7.34	7.41	7.45
-60	1.18	2.13	3.25	4.64	5.22	5.78	6.31	6.80	7.25	7.66	8.05	8.39	8.68	8.94	9.06	9.32	9.45	9.53	9.57
-55	1.14	1.53	2.73	4.44	5.38	6.12	6.84	7.53	8.18	8.78	9.34	9.86	10.3	10.7	11.1	11.3	11.6	11.7	11.8
-50	1.34	2.41	4.15	5.53	6.43	7.33	8.20	9.05	9.83	10.6	11.3	11.9	12.5	13.0	13.4	13.7	13.9	14.0	14.0
-45	0.33	1.72	3.34	5.28	6.34	7.42	8.48	9.52	10.5	11.5	12.4	13.2	13.9	14.6	15.2	15.6	16.0	16.2	16.3
-40	1.37	2.85	5.10	6.30	7.53	8.79	10.0	11.2	12.4	13.5	14.5	15.4	16.2	17.0	17.6	18.0	18.4	18.6	18.6
-35	0.18	2.01	4.15	5.86	7.21	8.62	10.0	11.4	12.8	14.1	15.3	16.5	17.5	18.4	19.2	19.9	20.3	20.6	20.8
-30	1.45	3.42	5.56	7.04	8.57	10.1	11.7	13.3	14.7	16.2	17.6	18.8	19.9	20.9	21.7	22.3	22.7	22.9	23.0
-25	0.14	2.38	4.88	6.42	8.04	9.74	11.5	13.2	14.9	16.5	18.1	19.6	20.9	22.0	23.0	23.8	24.3	24.7	24.9
-20	1.67	4.43	6.02	7.73	9.55	11.4	13.3	15.2	17.0	18.8	20.4	21.9	23.3	24.4	25.3	26.0	26.5	26.8	26.8
-15	0.00	3.13	5.16	6.88	8.77	10.7	12.7	14.7	16.7	18.7	20.5	22.3	23.8	25.1	26.3	27.1	27.8	28.3	28.4
-10	2.08	4.62	6.33	8.31	10.2	12.4	14.5	16.7	18.8	20.8	22.7	24.5	26.0	27.3	28.3	29.2	29.8	30.1	30.0
-5	0.00	3.71	5.34	7.20	9.26	11.4	13.6	15.9	18.2	20.4	22.5	24.4	26.1	27.6	28.9	29.9	30.6	31.1	31.3
0	3.16	4.72	6.54	8.57	10.8	13.1	15.4	17.8	20.2	22.4	24.5	26.5	28.1	29.5	30.7	31.6	32.2	32.5	32.6
5	0.00	3.77	5.43	7.34	9.46	11.7	14.1	16.6	19.1	21.5	23.8	25.9	27.9	29.5	30.9	32.0	32.8	33.4	33.5
10	3.26	4.75	6.57	8.61	10.8	13.2	15.7	18.3	20.8	23.3	25.7	27.8	29.7	31.3	32.5	33.5	34.2	34.5	34.5
15	0.23	3.77	5.40	7.29	9.41	11.7	14.1	16.7	19.3	21.9	24.3	26.7	28.8	30.7	32.2	33.4	34.2	34.8	34.9
20	3.19	4.68	6.46	8.47	10.7	13.1	15.6	18.2	20.8	23.4	25.9	28.2	30.2	31.9	33.3	34.3	35.0	35.4	35.4
25	0.42	3.73	5.26	7.06	9.07	11.3	13.6	16.1	18.7	21.3	23.9	26.3	28.6	30.5	32.2	33.4	34.4	34.9	35.1
30	3.20	4.55	6.18	8.02	10.1	12.3	14.7	17.2	19.8	22.3	24.8	27.2	29.3	31.1	32.6	33.7	34.5	34.9	34.9
35	0.54	3.66	5.03	6.64	8.46	10.5	12.6	14.9	17.3	19.8	22.2	24.5	26.7	28.7	30.3	31.7	32.6	33.3	33.5
40	3.16	4.34	5.77	7.39	9.21	11.2	13.3	15.5	17.8	20.1	22.4	24.5	26.6	28.3	29.7	30.9	31.6	32.1	32.2
45	0.58	3.55	4.71	6.08	7.61	9.30	11.1	13.1	15.1	17.2	19.2	21.2	23.1	24.9	26.4	27.6	28.5	29.1	29.5
50	3.09	4.10	5.26	6.57	8.01	9.60	11.3	13.0	14.9	16.7	18.5	20.2	21.8	23.3	24.5	25.5	26.2	26.7	26.8
55	0.71	3.39	4.33	5.40	6.58	7.88	9.26	10.7	12.2	13.8	15.3	16.8	18.1	19.4	20.5	21.4	22.2	22.7	23.0
60	2.98	3.78	4.66	5.63	6.69	7.81	8.98	10.2	11.4	12.7	13.8	15.0	16.0	16.9	17.7	18.3	18.8	19.1	19.2
65	0.97	3.24	3.93	4.68	5.48	6.35	7.24	8.16	9.09	10.0	10.9	11.7	12.5	13.2	13.8	14.3	14.7	15.0	15.2
70	2.86	3.51	4.08	4.68	5.31	5.95	6.60	7.23	7.86	8.45	9.00	9.49	9.93	10.3	10.6	10.9	11.1	11.2	11.2
75	1.38	3.05	3.48	3.90	4.34	4.77	5.19	5.59	5.97	6.30	6.60	6.87	7.10	7.26	7.38	7.48	7.56	7.62	7.67
80	2.54	3.10	3.38	3.65	3.88	4.09	4.25	4.39	4.48	4.53	4.53	4.53	4.47	4.38	4.28	4.19	4.14	4.11	4.11
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1054A P:2.530W PF:1.000 Lamp Flux:97.5712x1 lm																		
NAME: LLS-COVE1-W40-8W-24V-R									TYPE:LED					WEIGHT:				
DIM.:									SPEC.:					SERIAL No.:202010028				
MFR.: 中山市泰然光电科技有限公司									SUR.:					PROTECTION ANGLE:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.73	1.84	1.98	2.16	2.34	2.54	2.74	2.92	3.08	3.22	3.33	3.42	3.46	3.47	2.87	2.21	1.72	2.36	
-75	3.55	3.58	3.66	3.76	3.84	3.94	4.04	4.12	4.18	4.22	4.23	4.22	4.18	4.03	3.77	2.83	1.90	1.68	
-70	5.39	5.42	5.46	5.46	5.46	5.46	5.45	5.41	5.34	5.23	5.10	5.00	4.69	4.43	3.41	2.50	1.68	1.59	
-65	7.47	7.48	7.50	7.46	7.38	7.28	7.16	7.00	6.80	6.56	6.29	6.01	5.66	5.22	4.79	3.52	2.35	1.64	
-60	9.57	9.57	9.49	9.36	9.18	8.95	8.68	8.36	7.99	7.58	7.13	6.63	6.09	5.51	4.51	2.86	1.79	1.63	
-55	11.8	11.8	11.7	11.5	11.3	11.0	10.6	10.2	9.67	9.12	8.53	7.89	7.20	6.47	5.71	4.45	2.72	1.61	
-50	14.0	13.9	13.7	13.4	13.0	12.5	12.0	11.4	10.7	9.96	9.17	8.33	7.44	6.53	5.60	3.72	1.86	0.62	
-45	16.4	16.2	16.0	15.7	15.3	14.8	14.1	13.4	12.6	11.7	10.8	9.82	8.78	7.70	6.61	5.45	3.28	1.66	
-40	18.6	18.4	18.0	17.6	17.0	16.3	15.4	14.5	13.5	12.4	11.3	10.1	8.83	7.56	6.31	5.06	2.27	0.30	
-35	20.8	20.6	20.3	19.9	19.3	18.5	17.7	16.6	15.5	14.3	13.0	11.7	10.3	8.88	7.46	6.06	4.27	1.71	
-30	22.8	22.5	22.1	21.5	20.7	19.8	18.7	17.5	16.1	14.7	13.2	11.7	10.1	8.48	6.92	5.42	2.63	0.27	
-25	24.9	24.6	24.3	23.7	22.9	22.0	20.9	19.6	18.2	16.6	15.0	13.3	11.6	9.87	8.14	6.48	4.92	1.85	
-20	26.7	26.3	25.7	25.0	24.1	22.9	21.6	20.1	18.4	16.7	14.8	12.9	11.1	9.17	7.36	5.65	3.64	0.20	
-15	28.4	28.1	27.6	27.0	26.1	25.0	23.7	22.2	20.4	18.6	16.7	14.7	12.6	10.6	8.64	6.77	5.03	2.46	
-10	29.8	29.4	28.8	27.9	26.9	25.6	24.0	22.2	20.3	18.2	16.1	14.0	11.8	9.68	7.65	5.77	4.08	0.00	
-5	31.3	30.9	30.4	29.7	28.7	27.4	25.9	24.2	22.2	20.1	17.9	15.6	13.3	11.1	8.94	6.93	5.07	3.19	
0	32.4	31.9	31.2	30.3	29.1	27.6	25.8	23.8	21.6	19.3	16.9	14.5	12.2	9.91	7.77	5.81	4.09	0.00	
5	33.5	33.1	32.6	31.7	30.6	29.3	27.6	25.6	23.4	21.0	18.6	16.1	13.7	11.3	9.06	6.97	5.07	3.45	
10	34.2	33.7	33.0	31.9	30.6	28.9	27.0	24.8	22.3	19.9	17.3	14.8	12.3	9.99	7.79	5.79	4.05	0.24	
15	34.9	34.5	33.9	32.9	31.7	30.1	28.3	26.1	23.7	21.2	18.7	16.1	13.6	11.2	8.96	6.88	5.01	3.44	
20	35.1	34.6	33.7	32.5	31.0	29.2	27.1	24.7	22.2	19.6	17.0	14.4	12.0	9.70	7.57	5.66	4.01	0.44	
25	35.1	34.7	34.0	33.0	31.6	29.9	27.9	25.7	23.2	20.7	18.1	15.6	13.1	10.8	8.62	6.65	4.89	3.41	
30	34.6	34.0	33.1	31.8	30.2	28.3	26.1	23.7	21.2	18.7	16.2	13.7	11.4	9.23	7.25	5.47	3.92	0.58	
35	33.5	33.1	32.4	31.4	30.0	28.3	26.2	24.0	21.6	19.2	16.8	14.4	12.2	10.0	8.09	6.31	4.72	3.38	
40	32.0	31.4	30.5	29.3	27.7	25.8	23.7	21.4	19.1	16.8	14.6	12.4	10.4	8.46	6.74	5.20	3.86	0.66	
45	29.5	29.1	28.5	27.6	26.3	24.7	22.9	20.9	18.8	16.7	14.6	12.7	10.8	8.99	7.34	5.84	4.50	3.32	
50	26.6	26.2	25.4	24.4	23.1	21.5	19.8	17.9	16.1	14.1	12.4	10.7	9.03	7.50	6.10	4.82	3.71	0.99	
55	23.0	22.8	22.4	21.7	20.7	19.5	18.2	16.7	15.2	13.6	12.0	10.5	9.09	7.73	6.46	5.29	4.23	3.26	
60	19.2	19.0	18.5	17.9	17.0	15.9	14.8	13.6	12.4	11.1	9.86	8.65	7.49	6.41	5.39	4.45	3.60	1.18	
65	15.2	15.2	15.0	14.6	14.1	13.5	12.7	11.9	11.0	10.0	9.07	8.13	7.21	6.33	5.47	4.67	3.93	3.17	
70	11.2	11.2	11.0	10.8	10.5	10.1	9.58	9.03	8.43	7.80	7.15	6.51	5.85	5.21	4.58	3.99	3.40	1.26	
75	7.67	7.70	7.68	7.69	7.64	7.55	7.33	7.12	6.84	6.53	6.16	5.78	5.37	4.94	4.51	4.06	3.63	2.97	
80	4.15	4.27	4.34	4.53	4.66	4.77	4.86	4.89	4.89	4.83	4.71	4.56	4.37	4.15	3.89	3.62	3.29	1.98	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks: