

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	358.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	159.0V x 177.3H
	At 50% of Imax	105.1V x 113.1H
	At 90% of Imax	45.0V x 46.2H

Beam Flux	Total	997.1 lumens per klm.
	To 10% of Imax	989.4 lumens per klm.
	To 50% of Imax	681.6 lumens per klm.
	To 90% of Imax	156.3 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.1290A P:3.096W PF:1.000 Lamp Flux:200.004x1 lm		
NAME: LLS-COVE1-W40-8W-24V-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010031
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

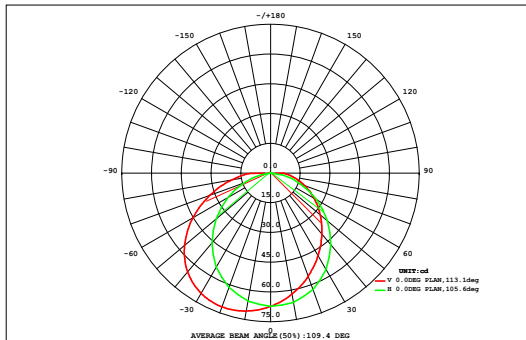

DATA OF LAMP		Eff: 64.60lm/W	
MODELLS-COVE1-W40-8W-24V		Imax (cd)	71.78
NOMINAL POWER (W)	3	AVAILABILITY (%)	99.5
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	198.9
NOMINAL FLUX (lm)	200.004	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	200.0
TEST VOLTAGE (V)	24	θ @50% (H,V)	113,105DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.04	0.12	0.21	0.29	0.34	0.38	0.39	0.38	0.36	0.34	0.32	0.30	0.28	0.24	0.19	0.13	0.07	0.02	4.39	4.32
70	0.03	0.12	0.24	0.36	0.48	0.57	0.64	0.67	0.66	0.63	0.57	0.50	0.41	0.32	0.23	0.14	0.07	0.02	6.67	6.67
60	0.03	0.14	0.30	0.48	0.67	0.82	0.93	0.99	0.99	0.94	0.85	0.72	0.58	0.43	0.30	0.18	0.08	0.02	9.48	9.48
50	0.04	0.16	0.36	0.60	0.85	1.07	1.23	1.32	1.32	1.24	1.11	0.93	0.74	0.54	0.36	0.21	0.09	0.02	12.2	12.2
40	0.04	0.18	0.41	0.71	1.03	1.31	1.51	1.62	1.61	1.52	1.35	1.12	0.87	0.63	0.42	0.24	0.10	0.02	14.7	14.7
30	0.04	0.20	0.46	0.80	1.17	1.50	1.74	1.86	1.86	1.74	1.54	1.27	0.99	0.71	0.46	0.26	0.11	0.02	16.7	16.7
	0.04	0.21	0.49	0.86	1.27	1.63	1.90	2.03	2.02	1.89	1.67	1.38	1.06	0.76	0.49	0.27	0.12	0.02	18.1	18.1
	0.04	0.21	0.50	0.89	1.31	1.69	1.96	2.10	2.09	1.96	1.73	1.43	1.10	0.79	0.51	0.28	0.12	0.03	18.7	18.7
	0.04	0.21	0.50	0.89	1.31	1.68	1.95	2.08	2.08	1.95	1.72	1.42	1.10	0.78	0.51	0.28	0.12	0.03	18.7	18.7
	0.04	0.20	0.48	0.85	1.25	1.61	1.86	1.99	1.99	1.87	1.66	1.37	1.06	0.76	0.49	0.28	0.12	0.02	17.9	17.9
	0.04	0.19	0.45	0.78	1.15	1.47	1.71	1.82	1.82	1.71	1.52	1.26	0.98	0.71	0.46	0.26	0.11	0.02	16.5	16.5
-30	0.03	0.17	0.40	0.69	1.00	1.28	1.48	1.58	1.58	1.49	1.33	1.11	0.87	0.63	0.42	0.24	0.11	0.02	14.4	14.4
-40	0.03	0.15	0.34	0.58	0.82	1.04	1.19	1.28	1.28	1.21	1.09	0.92	0.73	0.54	0.36	0.21	0.10	0.02	11.9	11.9
-50	0.02	0.13	0.28	0.46	0.63	0.78	0.89	0.94	0.95	0.90	0.82	0.70	0.57	0.43	0.30	0.18	0.08	0.01	9.08	9.07
-60	0.02	0.11	0.22	0.34	0.44	0.53	0.58	0.61	0.61	0.58	0.54	0.47	0.40	0.31	0.23	0.15	0.07	0.01	6.21	6.19
-70	0.02	0.08	0.16	0.22	0.27	0.30	0.30	0.30	0.29	0.28	0.26	0.25	0.23	0.20	0.16	0.11	0.06	0.01	3.51	3.20
-80	0.01	0.03	0.06	0.07	0.08	0.07	0.06	0.05	0.04	0.04	0.04	0.05	0.06	0.06	0.06	0.04	0.02	0.01	0.85	0.24
-90	0.01	0.03	0.06	0.07	0.08	0.07	0.06	0.05	0.04	0.04	0.04	0.05	0.06	0.06	0.06	0.04	0.02	0.01	0.85	0.24
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.54	2.62	5.87	9.89	14.1	17.7	20.3	21.6	21.5	20.3	18.1	15.2	12.0	8.85	5.94	3.47	1.57	0.34	200	---
Φ a	0.50	2.61	5.87	9.88	14.0	17.7	20.3	21.5	21.4	20.2	18.0	15.1	11.9	8.78	5.89	3.43	1.52	0.26	---	199

one-half-peak spread: U:52.1,D:53.6 , L:49.7,R:64.2


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.1290A P:3.096W PF:1.000 Lamp Flux:200.004x1 lm		
NAME: LLS-COVE1-W40-8W-24V-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010031
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

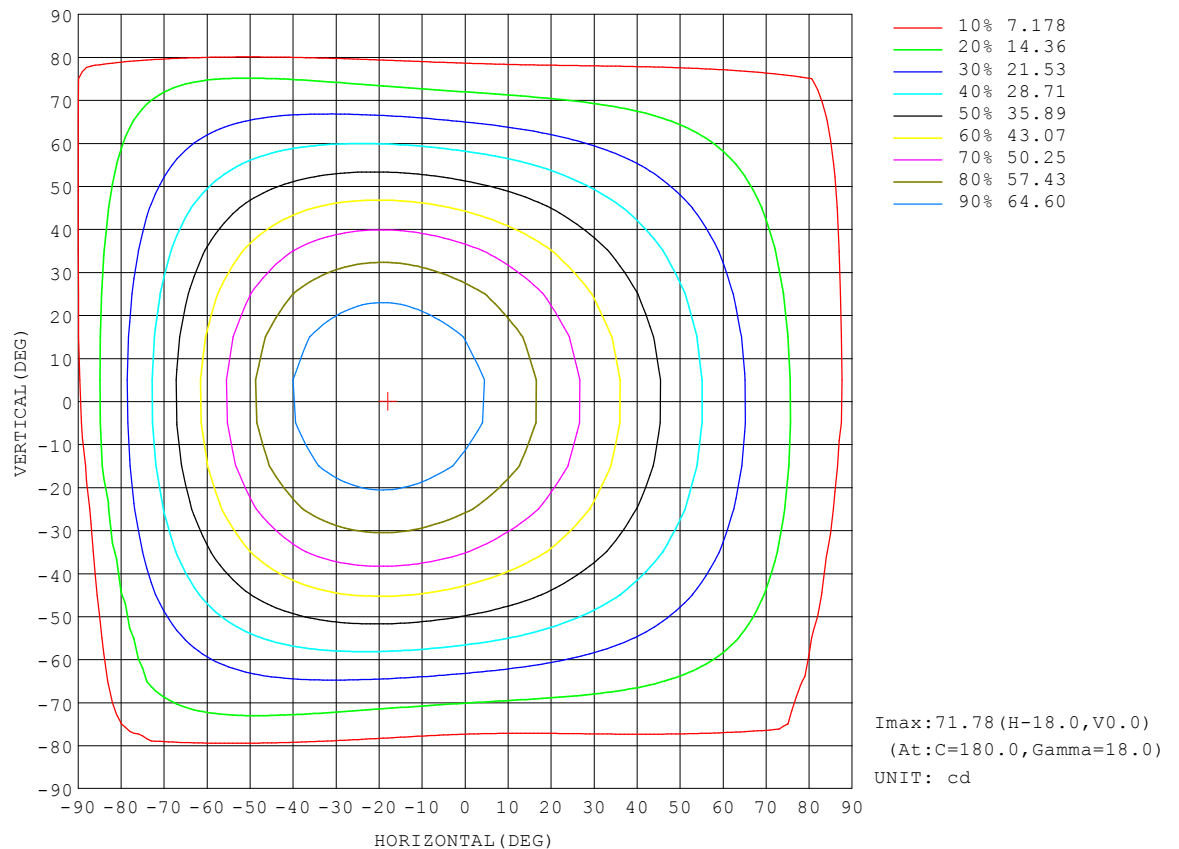


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.1290A P:3.096W PF:1.000 Lamp Flux:200.004x1 lm		
NAME: LLS-COVE1-W40-8W-24V-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010031
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

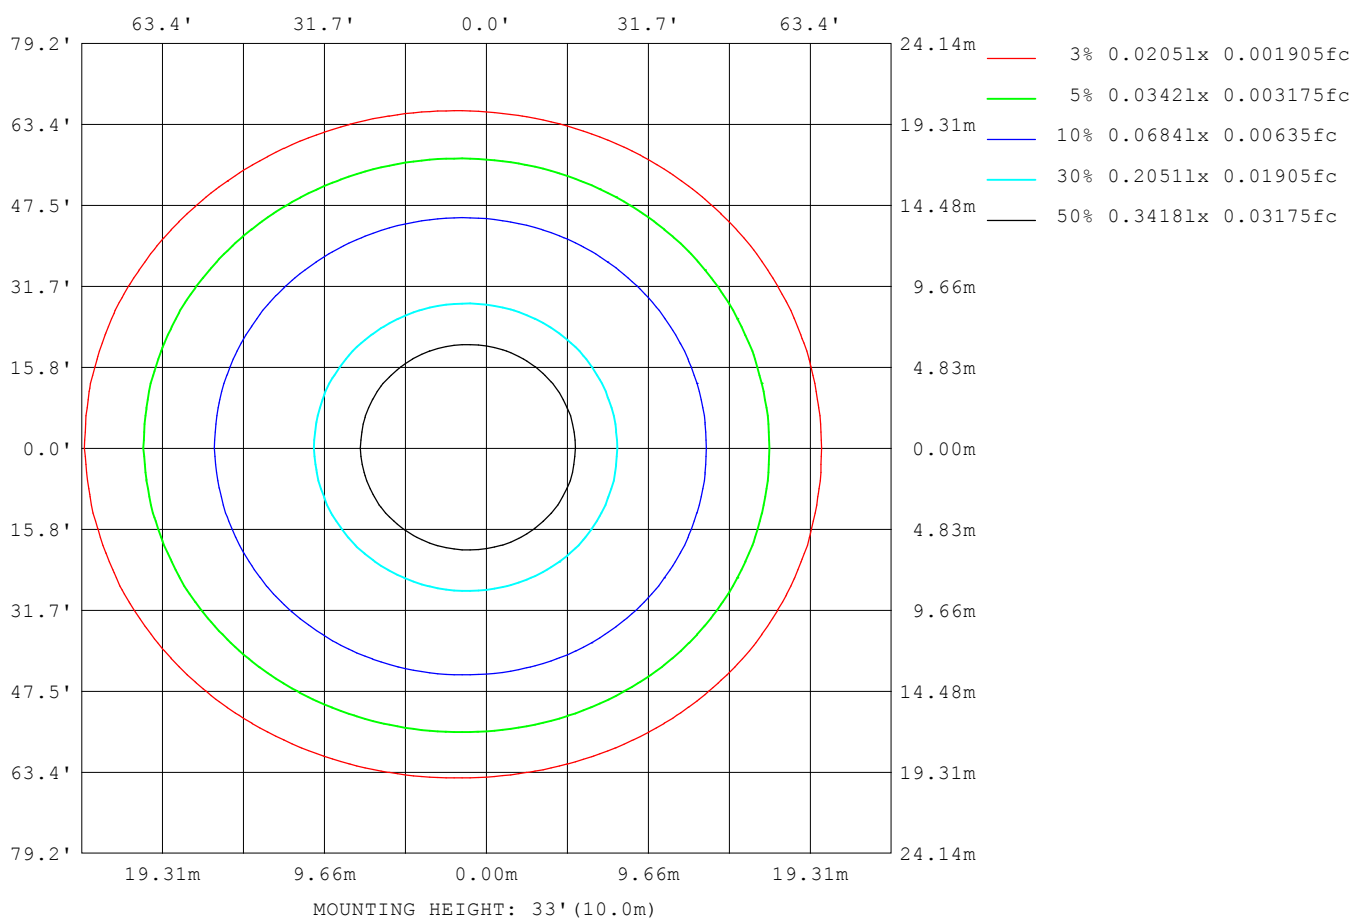


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.1290A P:3.096W PF:1.000 Lamp Flux:200.004x1 lm		
NAME: LLS-COVE1-W40-8W-24V-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010031
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

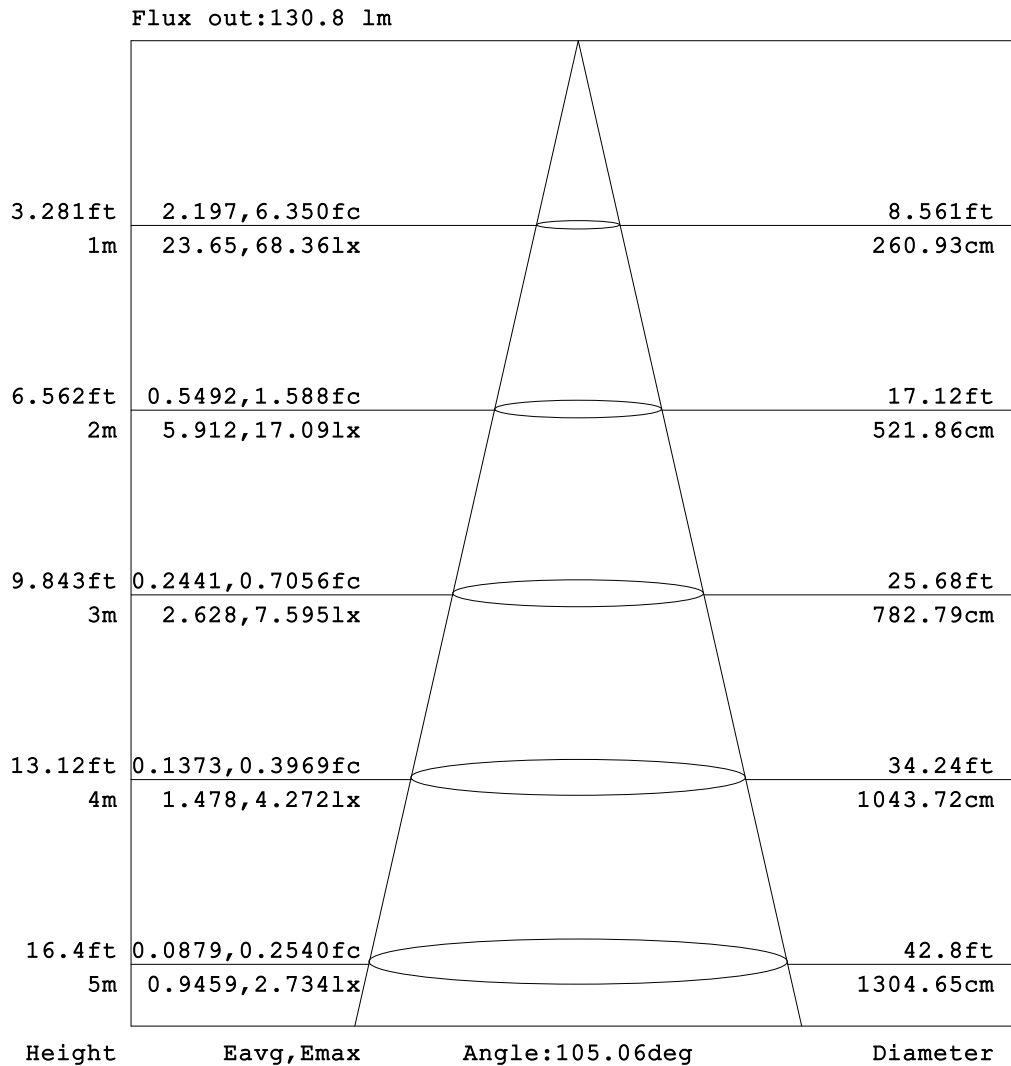


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

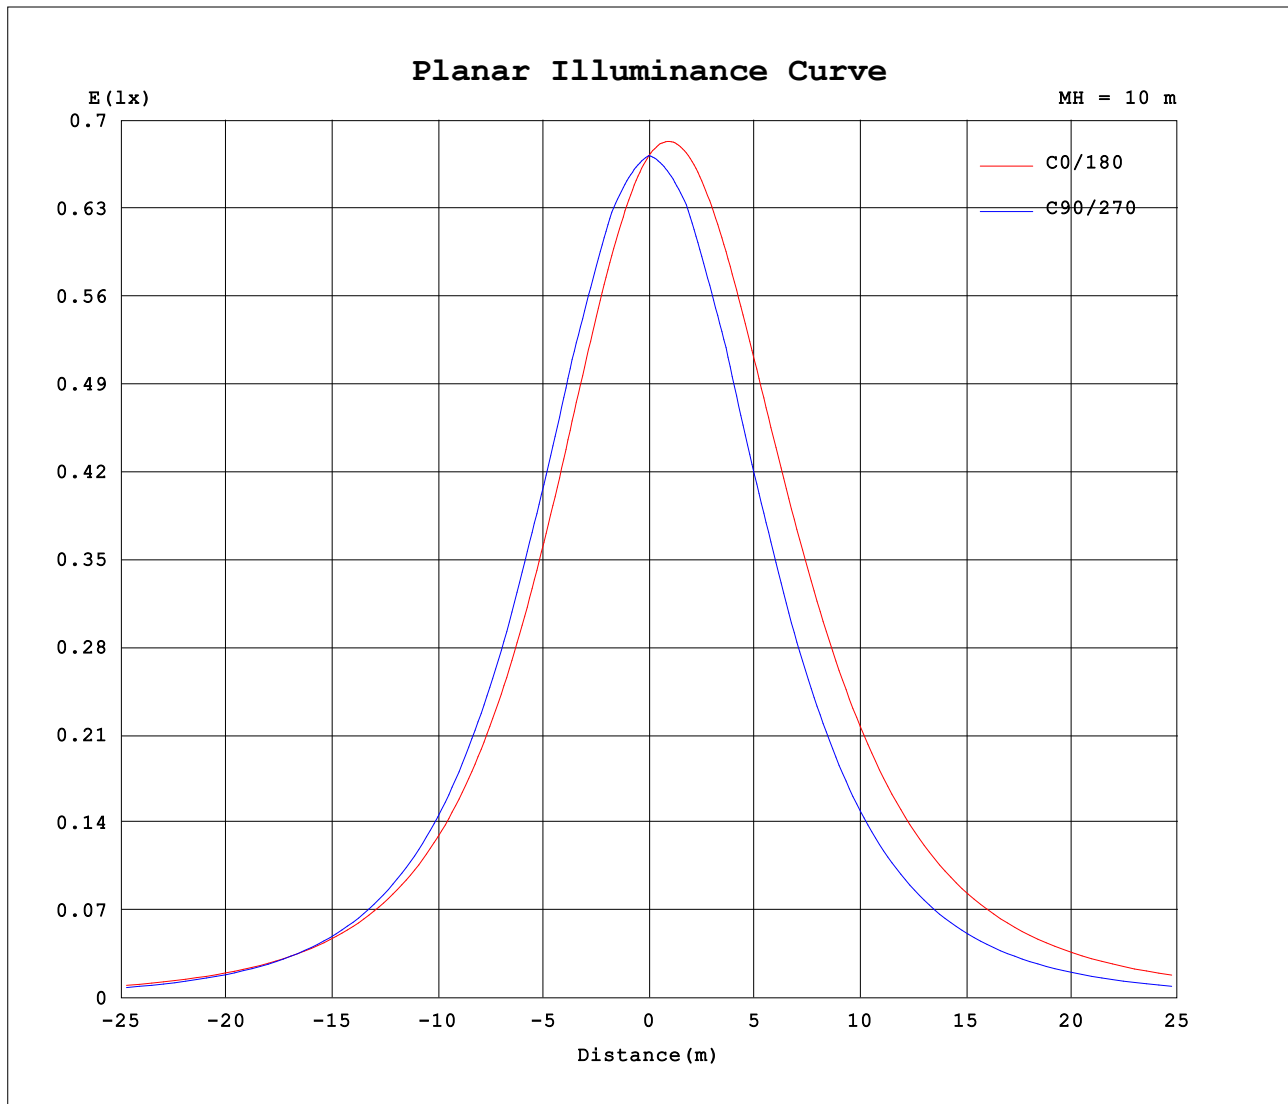

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1290A P:3.096W PF:1.000 Lamp Flux:200.004x1 lm		
NAME: LLS-COVE1-W40-8W-24V-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010031
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	5.29	4.71	6.59	8.47	10.5	10.5	10.4	10.1	9.64	9.14	8.55	7.93	7.30	6.68	6.09	5.57	5.14	4.83	4.67
-75	5.02	4.91	7.13	9.90	12.2	12.6	12.9	13.0	13.0	12.8	12.5	12.1	11.7	11.3	10.8	10.4	9.98	9.66	9.43
-70	4.74	5.12	7.67	11.3	13.9	14.7	15.4	16.0	16.3	16.5	16.5	16.4	16.1	15.9	15.5	15.2	14.8	14.5	14.2
-65	4.68	5.36	9.14	13.4	15.7	17.1	18.3	19.3	20.1	20.7	21.1	21.3	21.3	21.2	21.1	20.8	20.4	20.0	19.6
-60	4.62	5.60	10.6	15.4	17.5	19.4	21.1	22.7	23.9	24.9	25.7	26.2	26.5	26.6	26.6	26.4	26.0	25.6	25.1
-55	3.86	6.55	11.3	16.6	19.3	21.8	24.1	26.1	27.9	29.4	30.5	31.4	31.9	32.2	32.3	32.1	31.7	31.2	30.5
-50	3.09	7.49	12.1	17.9	21.1	24.1	27.0	29.6	31.9	33.8	35.3	36.5	37.4	37.8	37.9	37.8	37.4	36.7	35.9
-45	3.07	7.83	14.2	19.2	22.9	26.5	29.9	33.0	35.8	38.1	40.1	41.6	42.6	43.2	43.4	43.3	42.8	42.0	41.0
-40	3.05	8.16	16.3	20.5	24.8	28.9	32.8	36.4	39.7	42.5	44.8	46.6	47.9	48.6	48.9	48.8	48.2	47.3	46.1
-35	3.08	9.04	17.0	21.5	26.2	30.8	35.2	39.3	43.0	46.2	48.9	51.0	52.5	53.4	53.7	53.5	52.9	51.8	50.5
-30	3.10	9.92	17.7	22.6	27.6	32.7	37.6	42.2	46.4	50.0	53.0	55.4	57.1	58.1	58.5	58.3	57.5	56.4	54.9
-25	3.13	11.4	18.3	23.5	28.9	34.4	39.6	44.6	49.1	53.0	56.2	58.7	60.5	61.6	62.0	61.8	61.0	59.8	58.1
-20	3.15	12.8	18.9	24.5	30.2	36.1	41.7	47.0	51.8	56.0	59.4	62.1	64.0	65.2	65.6	65.4	64.6	63.2	61.4
-15	3.17	13.4	19.2	25.0	31.0	37.0	42.9	48.5	53.5	57.8	61.4	64.2	66.2	67.4	67.8	67.6	66.7	65.3	63.5
-10	3.19	14.0	19.4	25.5	31.7	38.0	44.1	49.9	55.1	59.7	63.4	66.3	68.3	69.6	70.0	69.8	68.9	67.5	65.7
-5	3.19	14.2	19.7	25.8	32.1	38.5	44.7	50.6	55.9	60.5	64.2	67.1	69.2	70.5	70.9	70.6	69.7	68.3	66.4
0	3.20	14.3	20.0	26.1	32.5	39.0	45.3	51.3	56.6	61.3	65.1	68.0	70.1	71.3	71.8	71.5	70.6	69.1	67.2
5	4.89	14.3	19.8	25.9	32.3	38.7	44.9	50.8	56.1	60.8	64.6	67.5	69.6	70.9	71.3	71.0	70.1	68.7	66.7
10	6.57	14.2	19.7	25.8	32.0	38.4	44.5	50.4	55.6	60.3	64.1	67.0	69.1	70.4	70.9	70.6	69.7	68.2	66.3
15	6.69	14.2	19.5	25.4	31.4	37.6	43.5	49.1	54.2	58.6	62.3	65.2	67.2	68.5	68.9	68.7	67.8	66.3	64.4
20	6.80	14.1	19.4	25.0	30.9	36.7	42.4	47.8	52.7	57.0	60.6	63.3	65.3	66.5	67.0	66.8	65.9	64.5	62.6
25	6.88	13.9	18.9	24.2	29.7	35.2	40.6	45.6	50.1	54.1	57.4	60.0	61.9	63.0	63.5	63.3	62.4	61.1	59.3
30	6.96	13.7	18.4	23.4	28.6	33.7	38.7	43.3	47.5	51.2	54.3	56.7	58.4	59.5	59.9	59.7	58.9	57.7	56.1
35	6.94	13.5	17.8	22.4	27.2	31.9	36.4	40.5	44.3	47.5	50.2	52.4	53.9	54.8	55.2	55.0	54.3	53.1	51.7
40	6.92	13.2	17.3	21.5	25.8	30.1	34.0	37.7	41.0	43.9	46.2	48.0	49.3	50.1	50.4	50.3	49.6	48.6	47.3
45	6.95	12.9	16.5	20.3	24.1	27.8	31.2	34.4	37.2	39.6	41.6	43.1	44.2	44.8	45.0	44.8	44.3	43.4	42.3
50	6.97	12.5	15.7	19.0	22.3	25.5	28.4	31.1	33.4	35.3	36.9	38.1	39.0	39.5	39.6	39.4	38.9	38.2	37.3
55	6.96	12.2	14.9	17.7	20.5	23.1	25.5	27.7	29.5	31.0	32.2	33.1	33.7	34.0	34.0	33.8	33.4	32.8	32.0
60	6.96	11.8	14.2	16.5	18.7	20.8	22.6	24.2	25.6	26.7	27.5	28.0	28.4	28.5	28.5	28.3	27.9	27.4	26.8
65	7.00	11.5	13.3	15.2	16.9	18.4	19.8	20.9	21.8	22.5	22.9	23.2	23.3	23.2	23.1	22.8	22.4	22.0	21.5
70	7.04	11.1	12.5	13.8	15.0	16.1	16.9	17.5	18.0	18.3	18.3	18.3	18.2	17.9	17.6	17.3	16.9	16.5	16.1
75	7.01	10.6	11.6	12.5	13.2	13.8	14.2	14.4	14.5	14.4	14.2	13.9	13.5	13.1	12.7	12.3	11.9	11.5	11.2
80	6.98	10.1	10.7	11.1	11.4	11.5	11.5	11.3	11.0	10.5	10.0	9.48	8.90	8.32	7.76	7.25	6.83	6.50	6.28
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1290A P:3.096W PF:1.000 Lamp Flux:200.004x1 lm																		
NAME: LLS-COVE1-W40-8W-24V-W									TYPE:LED					WEIGHT:				
DIM.:									SPEC.:					SERIAL No.:202010031				
MFR.: 中山市泰然光电科技有限公司									SUR.:					PROTECTION ANGLE:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	4.62	4.70	4.91	5.22	5.57	5.95	6.31	6.65	6.94	7.16	7.34	7.44	7.47	7.45	6.10	4.76	3.44	3.99	
-75	9.26	9.17	9.16	9.19	9.26	9.33	9.39	9.42	9.40	9.31	9.19	8.99	8.73	8.40	7.21	5.08	3.54	3.66	
-70	13.9	13.6	13.4	13.2	13.0	12.7	12.5	12.2	11.9	11.5	11.0	10.5	9.98	9.36	8.31	5.39	3.63	3.33	
-65	19.2	18.7	18.2	17.7	17.1	16.6	15.9	15.3	14.6	13.8	13.0	12.2	11.3	10.4	9.22	6.30	3.81	3.31	
-60	24.5	23.8	23.0	22.2	21.3	20.4	19.4	18.4	17.3	16.2	15.0	13.9	12.7	11.4	10.1	7.21	3.98	3.28	
-55	29.7	28.8	27.8	26.6	25.4	24.1	22.8	21.4	19.9	18.5	17.0	15.5	13.9	12.4	10.8	7.73	4.58	2.83	
-50	34.9	33.8	32.5	31.1	29.5	27.9	26.1	24.4	22.6	20.7	18.9	17.1	15.2	13.3	11.5	8.25	5.18	2.37	
-45	39.8	38.4	36.8	35.1	33.2	31.2	29.1	27.0	24.9	22.8	20.6	18.5	16.3	14.2	12.0	9.31	5.34	2.30	
-40	44.7	43.0	41.2	39.1	36.9	34.6	32.1	29.7	27.2	24.8	22.3	19.8	17.4	15.0	12.6	10.4	5.49	2.23	
-35	48.8	47.0	44.9	42.6	40.1	37.4	34.7	31.9	29.2	26.5	23.8	21.1	18.4	15.7	13.1	10.6	6.53	2.21	
-30	53.0	50.9	48.6	46.0	43.3	40.3	37.3	34.1	31.2	28.2	25.2	22.3	19.3	16.5	13.6	10.9	7.56	2.20	
-25	56.2	53.9	51.4	48.6	45.6	42.4	39.2	35.8	32.6	29.5	26.3	23.1	20.0	16.9	14.0	11.1	8.07	2.20	
-20	59.3	56.9	54.2	51.2	48.0	44.5	41.0	37.5	34.0	30.7	27.3	23.9	20.6	17.4	14.3	11.3	8.57	2.21	
-15	61.4	58.9	56.0	52.9	49.5	45.9	42.3	38.6	35.0	31.5	28.0	24.5	21.1	17.8	14.5	11.4	8.60	2.18	
-10	63.4	60.9	57.8	54.6	51.0	47.3	43.5	39.7	36.0	32.3	28.6	25.1	21.6	18.1	14.8	11.6	8.64	2.15	
-5	64.1	61.5	58.4	55.0	51.4	47.7	43.8	40.0	36.2	32.5	28.8	25.2	21.6	18.1	14.8	11.6	8.62	2.29	
0	64.8	62.1	58.9	55.5	51.8	48.0	44.1	40.2	36.4	32.7	29.0	25.3	21.7	18.2	14.8	11.6	8.60	2.42	
5	64.4	61.6	58.5	55.1	51.5	47.7	43.9	40.0	36.2	32.5	28.8	25.2	21.6	18.1	14.7	11.5	8.57	3.27	
10	63.9	61.1	58.0	54.7	51.1	47.4	43.6	39.8	36.0	32.3	28.6	25.1	21.5	18.1	14.7	11.5	8.55	4.12	
15	62.1	59.4	56.4	53.2	49.7	46.1	42.4	38.7	35.0	31.5	27.9	24.5	21.0	17.7	14.4	11.3	8.46	4.21	
20	60.3	57.7	54.8	51.7	48.3	44.8	41.2	37.6	34.1	30.7	27.2	23.8	20.5	17.3	14.1	11.1	8.38	4.30	
25	57.2	54.8	52.1	49.1	46.0	42.7	39.3	36.0	32.7	29.5	26.2	23.0	19.9	16.8	13.8	10.9	8.28	4.32	
30	54.1	51.9	49.4	46.6	43.7	40.6	37.5	34.4	31.3	28.2	25.2	22.2	19.2	16.3	13.4	10.7	8.18	4.35	
35	49.9	47.9	45.7	43.2	40.5	37.7	34.9	32.1	29.3	26.5	23.7	20.9	18.2	15.5	12.9	10.4	8.04	4.35	
40	45.8	44.0	42.0	39.8	37.4	34.9	32.4	29.9	27.3	24.8	22.3	19.7	17.2	14.7	12.4	10.1	7.90	4.35	
45	41.0	39.5	37.7	35.8	33.8	31.6	29.5	27.3	25.0	22.8	20.6	18.3	16.1	13.9	11.8	9.68	7.73	4.44	
50	36.2	34.9	33.5	31.9	30.1	28.4	26.5	24.6	22.7	20.8	18.9	16.9	15.0	13.1	11.2	9.32	7.56	4.53	
55	31.1	30.1	28.9	27.6	26.2	24.7	23.2	21.7	20.2	18.6	17.0	15.3	13.7	12.1	10.5	8.92	7.39	4.58	
60	26.1	25.2	24.3	23.3	22.3	21.1	20.0	18.8	17.6	16.3	15.1	13.8	12.5	11.1	9.83	8.52	7.22	4.63	
65	20.9	20.3	19.6	18.9	18.2	17.4	16.6	15.8	14.9	14.0	13.1	12.2	11.2	10.2	9.13	8.07	7.02	4.59	
70	15.7	15.3	14.9	14.5	14.1	13.7	13.2	12.8	12.3	11.7	11.2	10.5	9.88	9.17	8.42	7.63	6.82	4.54	
75	10.9	10.7	10.5	10.4	10.3	10.2	10.1	9.96	9.80	9.59	9.34	9.04	8.68	8.26	7.78	7.24	6.67	4.62	
80	6.15	6.12	6.17	6.32	6.53	6.76	6.98	7.17	7.34	7.45	7.53	7.53	7.48	7.35	7.13	6.86	6.51	4.70	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks: