

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	394.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	157.8V x 176.2H
	At 50% of Imax	96.6V x 101.1H
	At 90% of Imax	35.5V x 34.6H

Beam Flux	Total	996.8 lumens per klm.
	To 10% of Imax	986.4 lumens per klm.
	To 50% of Imax	614.4 lumens per klm.
	To 90% of Imax	105.6 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.4674A P:11.22W PF:1.000 Lamp Flux:419.036x1 lm		
NAME: LLS-COVE1-W40-8W-24V-全亮	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010037
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

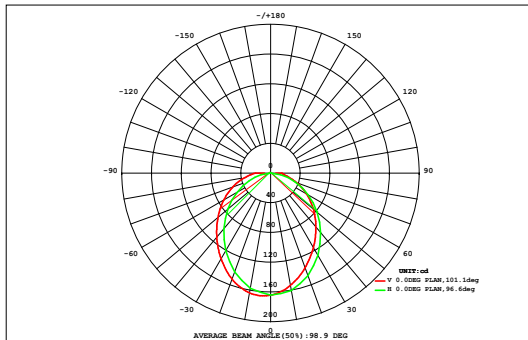

DATA OF LAMP		Eff:37.35lm/W	
MODELLS-COVE1-W40-8W-24V		Imax (cd)	165.4
NOMINAL POWER (W)	11	AVAILABILITY (%)	99.2
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	415.8
NOMINAL FLUX (lm)	419.036	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	419.0
TEST VOLTAGE (V)	24	θ @50% (H,V)	101,97DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.07	0.24	0.43	0.61	0.76	0.86	0.90	0.87	0.81	0.75	0.72	0.66	0.58	0.48	0.37	0.26	0.16	0.05	9.59	9.28
70	0.06	0.23	0.46	0.71	0.96	1.18	1.35	1.43	1.45	1.39	1.28	1.12	0.91	0.68	0.46	0.27	0.14	0.04	14.1	14.1
60	0.07	0.27	0.55	0.89	1.26	1.60	1.88	2.07	2.14	2.08	1.90	1.64	1.31	0.96	0.62	0.35	0.16	0.04	19.8	19.8
50	0.07	0.29	0.63	1.06	1.54	2.01	2.42	2.72	2.85	2.77	2.51	2.14	1.69	1.22	0.78	0.42	0.18	0.05	25.4	25.4
40	0.08	0.32	0.71	1.21	1.79	2.39	2.94	3.36	3.54	3.45	3.10	2.60	2.03	1.45	0.92	0.49	0.20	0.05	30.6	30.6
30	0.08	0.34	0.77	1.33	1.99	2.71	3.40	3.94	4.19	4.07	3.63	3.00	2.31	1.64	1.03	0.55	0.21	0.05	35.2	35.2
	0.08	0.35	0.81	1.41	2.14	2.95	3.76	4.40	4.71	4.56	4.03	3.30	2.51	1.77	1.11	0.58	0.22	0.05	38.7	38.7
	0.08	0.36	0.82	1.44	2.21	3.06	3.93	4.64	4.98	4.82	4.25	3.46	2.62	1.83	1.15	0.60	0.23	0.05	40.5	40.5
	0.08	0.35	0.81	1.43	2.19	3.04	3.89	4.60	4.93	4.78	4.22	3.44	2.61	1.83	1.15	0.60	0.23	0.05	40.2	40.2
	0.07	0.34	0.78	1.37	2.08	2.86	3.64	4.27	4.58	4.46	3.96	3.26	2.49	1.76	1.11	0.59	0.23	0.05	37.9	37.9
-30	0.07	0.32	0.73	1.27	1.90	2.58	3.23	3.75	4.01	3.91	3.51	2.93	2.27	1.62	1.03	0.55	0.22	0.05	34.0	33.9
-40	0.06	0.30	0.66	1.13	1.67	2.23	2.75	3.14	3.33	3.26	2.96	2.50	1.97	1.42	0.92	0.50	0.20	0.04	29.0	29.0
-50	0.05	0.27	0.59	0.98	1.42	1.85	2.23	2.50	2.63	2.57	2.35	2.02	1.61	1.18	0.77	0.42	0.18	0.04	23.7	23.6
-60	0.04	0.24	0.50	0.81	1.13	1.44	1.70	1.87	1.94	1.90	1.75	1.51	1.22	0.91	0.60	0.35	0.16	0.03	18.1	18.0
-70	0.04	0.20	0.41	0.63	0.84	1.03	1.18	1.26	1.28	1.24	1.15	1.00	0.82	0.63	0.44	0.27	0.13	0.03	12.6	12.5
-80	0.03	0.16	0.32	0.45	0.56	0.63	0.68	0.70	0.67	0.64	0.60	0.53	0.46	0.38	0.30	0.21	0.12	0.02	7.47	6.45
-90	0.02	0.07	0.13	0.16	0.18	0.18	0.17	0.16	0.14	0.13	0.13	0.12	0.11	0.12	0.11	0.09	0.05	0.01	2.09	0.48
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	1.05	4.66	10.1	16.9	24.6	32.6	40.0	45.7	48.2	46.8	42.1	35.2	27.5	19.9	12.9	7.11	3.02	0.69	419	---
Φ a	0.92	4.64	10.1	16.9	24.5	32.5	39.9	45.5	47.9	46.5	41.8	35.0	27.3	19.6	12.6	6.89	2.79	0.46	---	416

one-half-peak spread: U:47.1,D:50.2 , L:51.4,R:50.6


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4674A P:11.22W PF:1.000 Lamp Flux:419.036x1 lm		
NAME: LLS-COVE1-W40-8W-24V-全亮	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010037
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

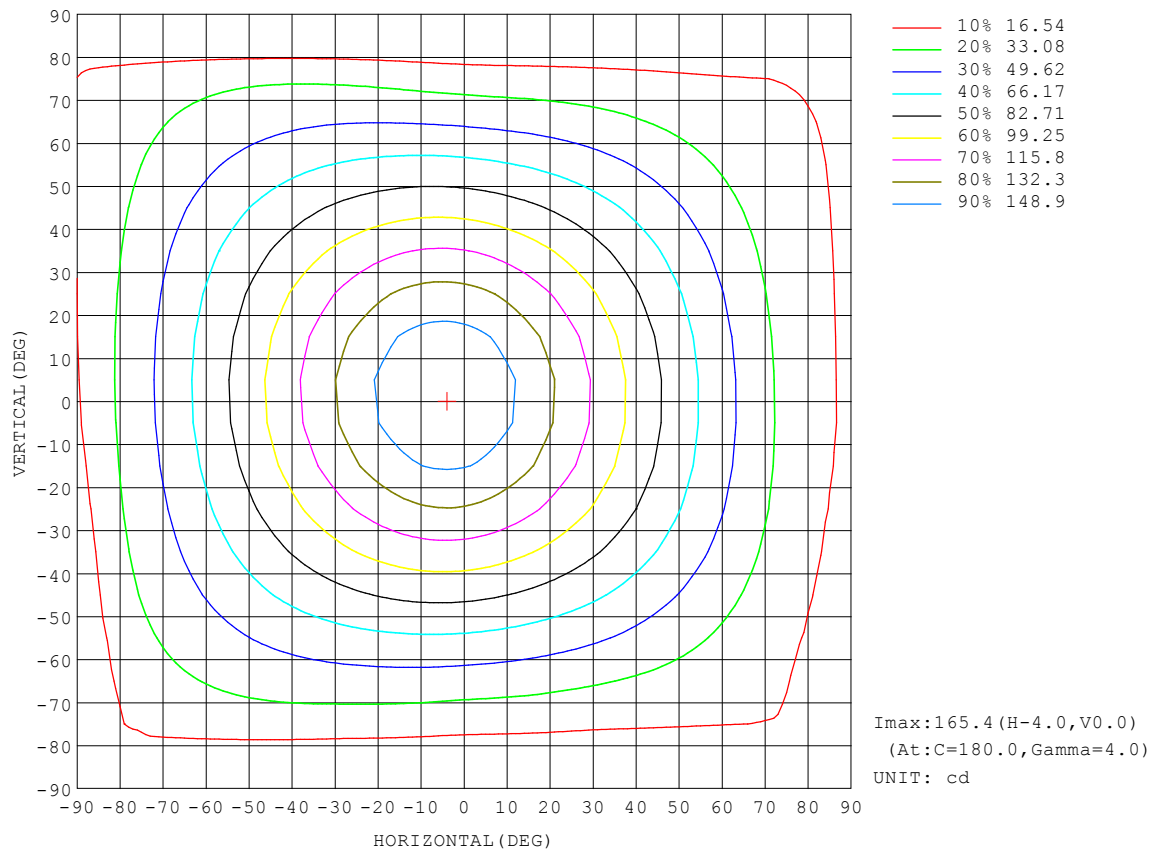


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.4674A P:11.22W PF:1.000 Lamp Flux:419.036x1 lm		
NAME: LLS-COVE1-W40-8W-24V-全亮	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010037
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

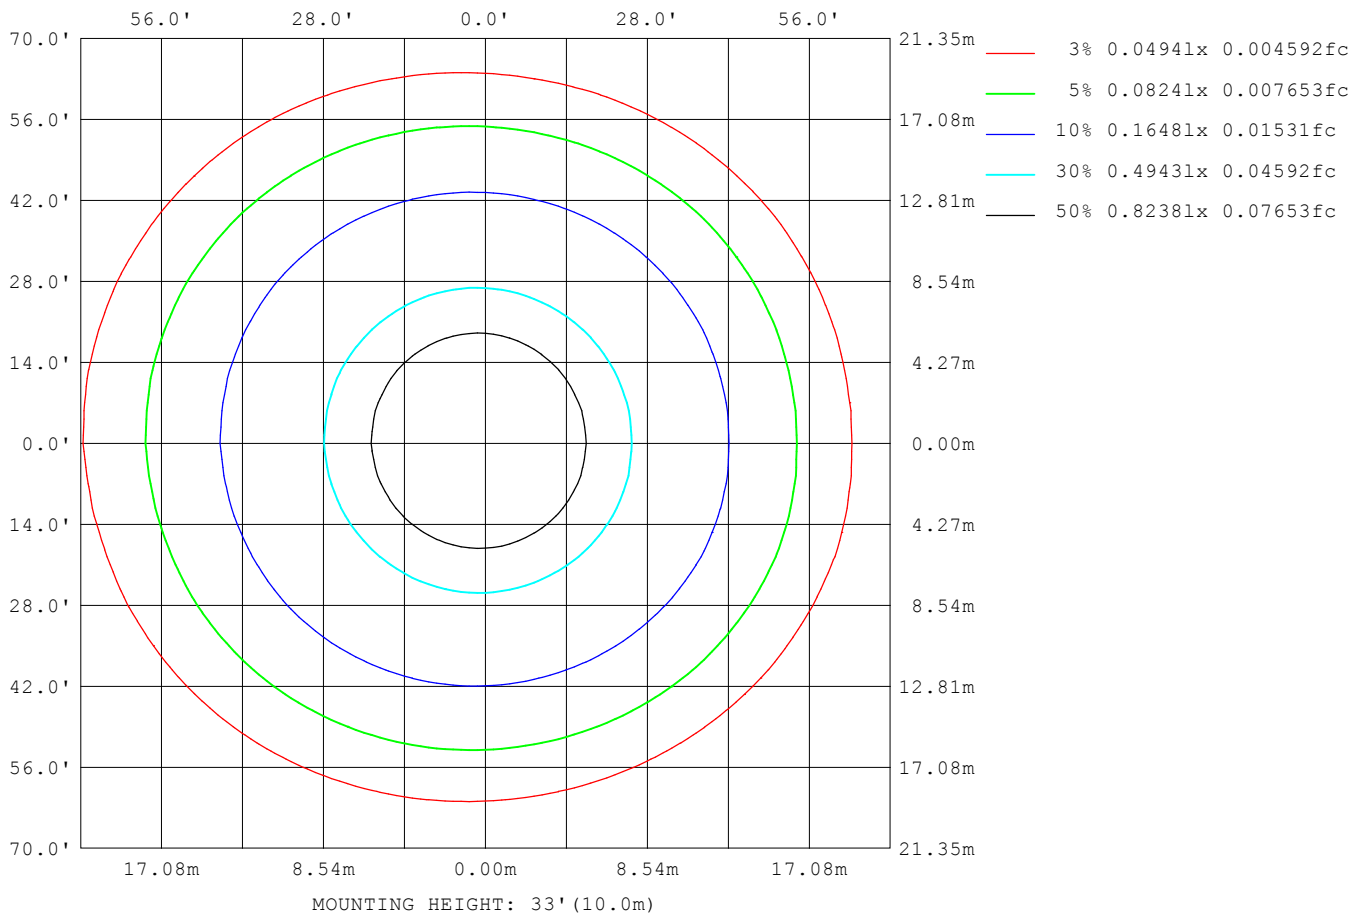


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.4674A P:11.22W PF:1.000 Lamp Flux:419.036x1 lm		
NAME: LLS-COVE1-W40-8W-24V-全亮	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010037
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

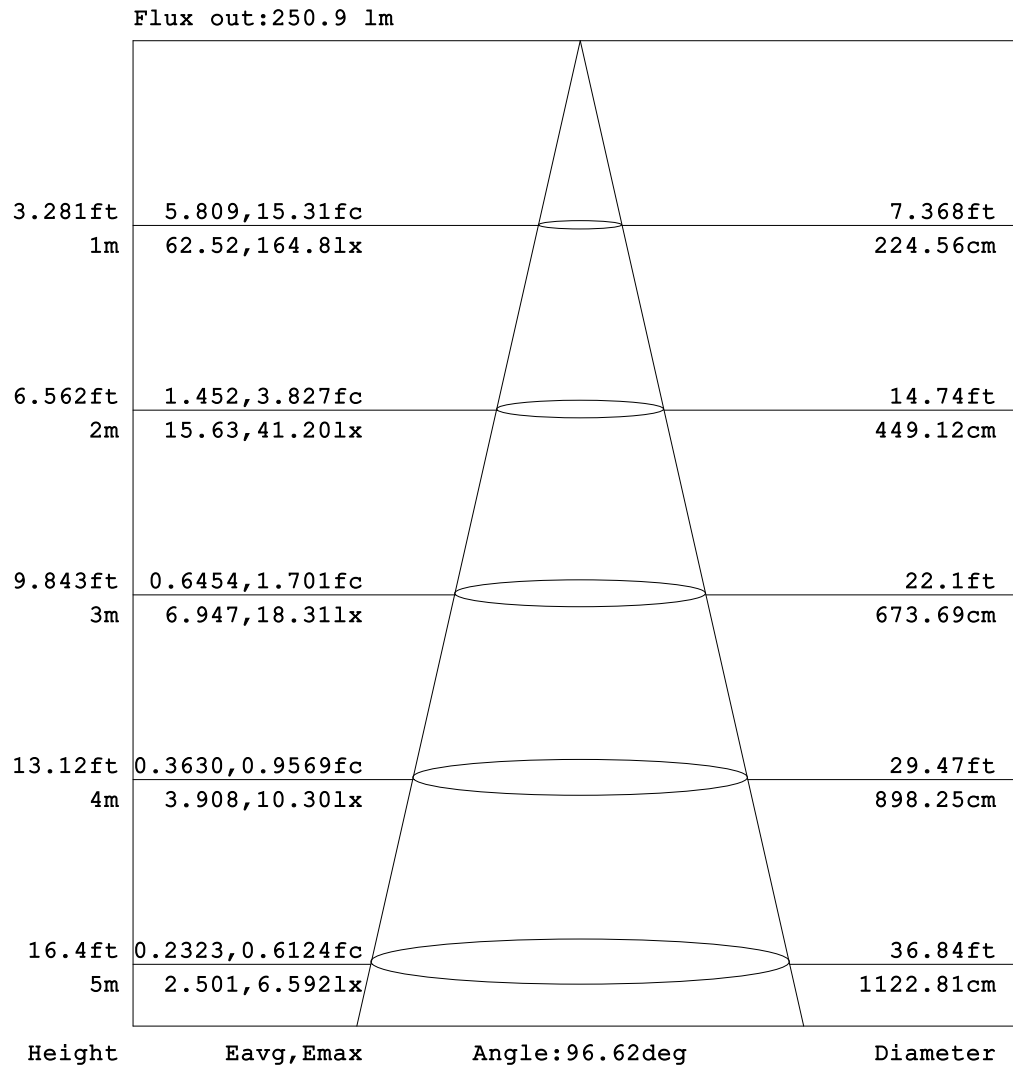


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 23.5DEG
Operators: QC1
Test Date: 2020-11-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity: 34%
Test Distance: 8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

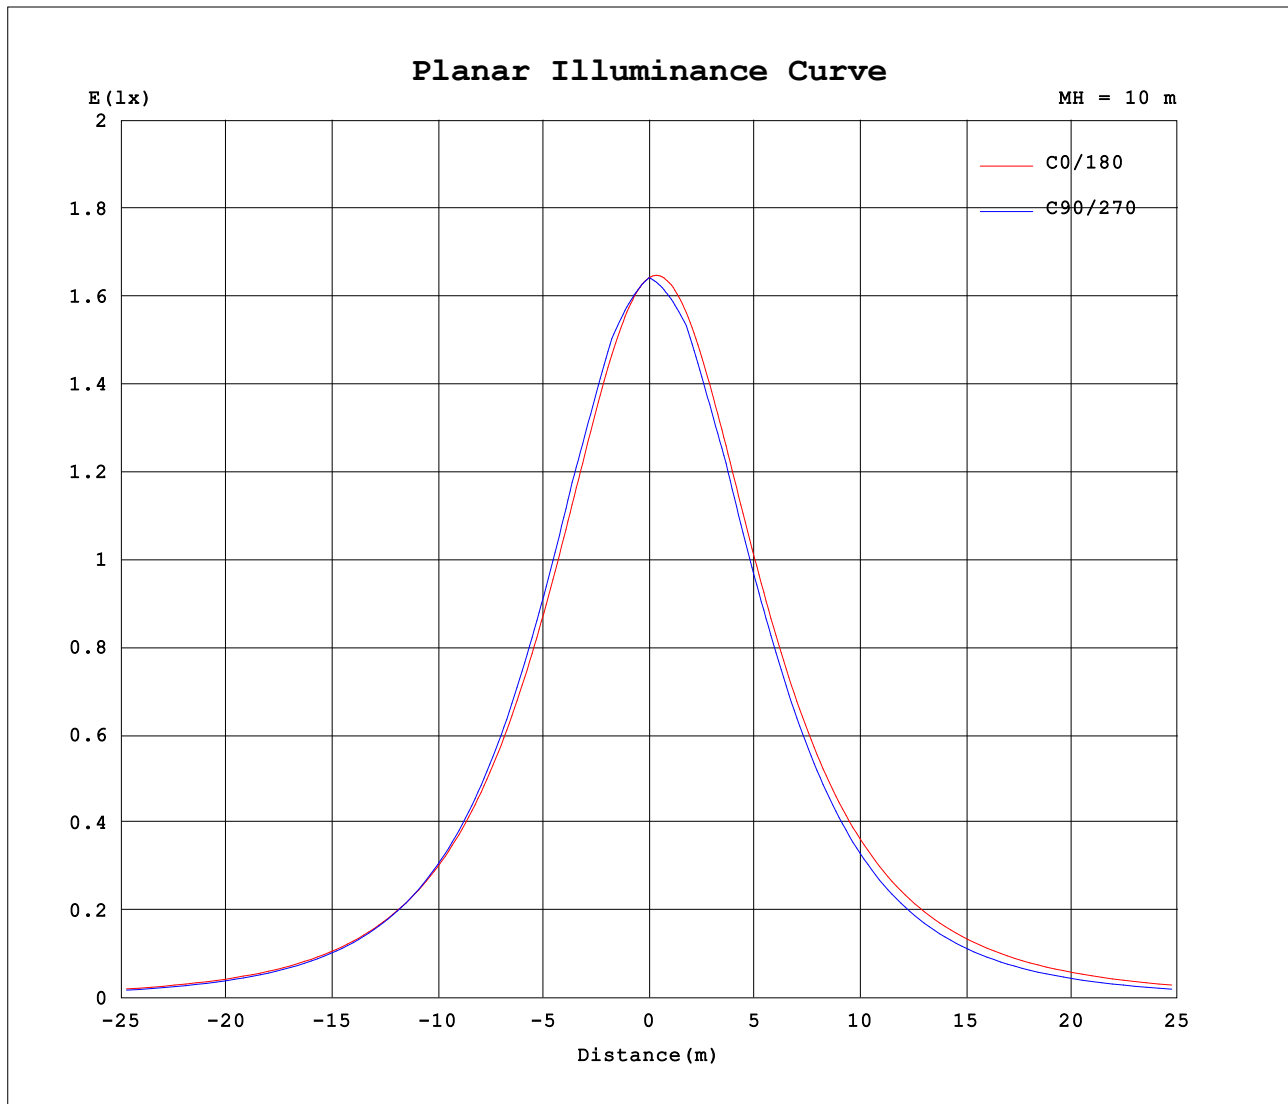

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4674A P:11.22W PF:1.000 Lamp Flux:419.036x1 lm		
NAME: LLS-COVE1-W40-8W-24V-全亮	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010037
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	10.3	10.3	14.3	18.1	21.3	21.4	21.3	21.0	20.5	19.9	19.1	18.1	17.1	16.4	16.2	15.5	14.7	13.8	13.3
-75	9.95	10.7	15.3	20.5	23.8	24.6	25.3	25.8	26.0	26.1	25.9	25.6	25.2	24.8	24.6	24.2	23.6	22.7	22.1
-70	9.64	11.1	16.3	22.9	26.2	27.9	29.3	30.5	31.5	32.3	32.8	33.2	33.3	33.2	33.1	32.8	32.4	31.6	30.8
-65	9.51	11.9	18.4	25.6	29.0	31.4	33.7	35.7	37.6	39.1	40.4	41.4	42.2	42.7	42.9	43.0	42.9	42.3	41.7
-60	9.39	12.8	20.6	28.3	31.7	35.0	38.1	41.0	43.6	46.0	48.0	49.7	51.1	52.1	52.8	53.2	53.4	53.1	52.6
-55	8.26	14.0	21.8	30.2	34.3	38.4	42.3	46.0	49.5	52.6	55.4	57.9	60.0	61.6	62.9	63.8	64.3	64.3	63.7
-50	7.13	15.2	23.0	32.0	36.9	41.8	46.5	51.0	55.3	59.3	62.9	66.1	68.9	71.2	73.0	74.4	75.2	75.4	74.9
-45	7.17	15.9	26.0	33.8	39.4	45.0	50.5	55.8	60.9	65.6	70.1	74.1	77.7	80.8	83.3	85.3	86.5	86.9	86.4
-40	7.20	16.5	29.0	35.6	41.9	48.3	54.5	60.6	66.4	72.0	77.3	82.1	86.5	90.3	93.6	96.1	97.8	98.3	97.9
-35	7.51	18.1	30.0	37.0	43.9	50.9	57.8	64.6	71.1	77.5	83.6	89.3	94.6	99.4	104	107	109	110	109
-30	7.82	19.6	31.0	38.4	45.9	53.6	61.1	68.5	75.8	83.0	89.9	96.5	103	109	113	118	120	121	121
-25	7.98	22.0	32.0	39.8	47.8	55.9	64.0	72.0	79.9	87.8	95.5	103	110	117	123	127	131	132	131
-20	8.13	24.4	33.0	41.2	49.7	58.3	66.9	75.5	84.0	92.6	101	109	117	125	132	137	141	142	142
-15	8.24	25.3	33.6	42.1	50.9	59.9	68.8	77.7	86.8	95.8	105	114	123	131	139	145	149	150	150
-10	8.34	26.2	34.2	43.1	52.2	61.4	70.6	80.0	89.5	99.1	109	118	128	137	145	152	156	158	157
-5	8.38	26.6	34.8	43.7	53.0	62.4	71.8	81.3	91.0	101	111	121	131	140	149	155	160	162	161
0	8.43	26.9	35.3	44.4	53.8	63.3	72.9	82.6	92.5	103	113	123	133	143	152	159	164	165	164
5	11.8	27.0	35.2	44.3	53.6	63.0	72.5	82.1	91.9	102	112	122	132	142	150	157	162	163	162
10	15.1	27.0	35.2	44.1	53.3	62.7	72.1	81.6	91.3	101	111	121	131	140	149	155	160	162	160
15	15.7	27.0	35.0	43.7	52.7	61.8	71.0	80.2	89.5	98.8	108	118	127	135	143	149	153	155	154
20	16.3	27.0	34.8	43.3	52.1	61.0	69.8	78.7	87.6	96.6	105	114	123	131	138	143	147	148	147
25	16.5	26.7	34.1	42.2	50.6	59.0	67.4	75.7	84.0	92.3	100	108	116	123	129	134	137	138	137
30	16.6	26.4	33.5	41.2	49.0	57.0	64.9	72.7	80.4	88.0	95.4	102	109	115	121	125	127	128	127
35	16.6	26.1	32.7	39.8	47.2	54.6	61.8	69.0	76.0	82.8	89.3	95.4	101	106	111	114	116	117	116
40	16.7	25.8	31.9	38.5	45.3	52.1	58.8	65.3	71.5	77.5	83.2	88.4	93.3	97.5	101	104	105	106	105
45	16.7	25.3	30.8	36.7	42.9	48.9	54.8	60.6	66.0	71.2	76.1	80.4	84.5	87.8	90.6	92.7	93.9	94.1	93.3
50	16.8	24.8	29.7	34.9	40.4	45.8	50.9	55.9	60.6	65.0	69.0	72.5	75.6	78.1	80.2	81.6	82.4	82.4	81.7
55	16.8	24.3	28.6	33.1	37.8	42.4	46.7	50.9	54.8	58.3	61.5	64.3	66.6	68.4	69.7	70.6	71.1	70.9	70.1
60	16.9	23.9	27.5	31.3	35.2	39.0	42.5	45.9	49.0	51.7	54.1	56.1	57.6	58.7	59.3	59.6	59.7	59.3	58.5
65	17.0	23.3	26.3	29.3	32.4	35.3	38.0	40.6	42.8	44.8	46.4	47.6	48.5	49.0	49.1	48.9	48.5	47.9	47.1
70	17.0	22.8	25.0	27.3	29.6	31.6	33.6	35.2	36.7	37.8	38.7	39.2	39.4	39.3	38.8	38.1	37.3	36.4	35.6
75	17.1	22.2	23.9	25.4	26.9	28.1	29.2	30.1	30.7	31.0	31.1	31.0	30.5	29.9	29.0	27.9	26.7	25.6	24.7
80	17.2	21.7	22.7	23.5	24.2	24.6	24.8	24.9	24.7	24.3	23.6	22.8	21.7	20.5	19.1	17.6	16.1	14.7	13.9
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4674A P:11.22W PF:1.000 Lamp Flux:419.036x1 lm		
NAME: LLS-COVE1-W40-8W-24V-全亮	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010037
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	13.3	13.0	13.0	12.9	12.5	12.1	12.3	12.7	13.2	13.6	14.1	14.5	15.0	15.4	13.4	10.6	7.81	8.72	
-75	21.8	21.4	21.1	20.5	19.8	19.2	18.8	18.4	18.1	17.7	17.3	16.9	16.6	16.3	14.7	11.1	8.00	8.33	
-70	30.3	29.9	29.1	28.1	27.2	26.2	25.2	24.1	23.0	21.8	20.5	19.3	18.2	17.3	15.9	11.6	8.18	7.94	
-65	41.0	40.2	39.2	37.8	36.4	34.8	33.1	31.3	29.3	27.2	25.0	22.9	20.9	19.0	17.2	12.6	8.60	7.80	
-60	51.7	50.5	49.2	47.5	45.6	43.4	41.0	38.4	35.6	32.6	29.5	26.5	23.5	20.8	18.5	13.7	9.02	7.65	
-55	62.7	61.2	59.5	57.3	54.9	52.1	49.0	45.6	42.1	38.3	34.4	30.4	26.6	22.9	19.8	14.9	9.79	6.85	
-50	73.7	71.9	69.7	67.1	64.1	60.7	57.0	52.9	48.6	44.0	39.2	34.4	29.6	25.1	21.1	16.2	10.6	6.04	
-45	85.0	82.8	80.0	76.8	73.0	68.9	64.4	59.6	54.5	49.2	43.7	38.0	32.5	27.1	22.3	17.7	10.9	5.92	
-40	96.2	93.6	90.3	86.4	82.0	77.1	71.9	66.3	60.4	54.4	48.1	41.7	35.3	29.2	23.6	19.2	11.2	5.81	
-35	107	104	100	95.6	90.4	84.7	78.6	72.3	65.7	58.9	52.0	45.0	38.0	31.1	24.9	19.9	13.2	5.97	
-30	119	115	110	105	98.8	92.3	85.4	78.3	71.0	63.5	56.0	48.3	40.6	33.1	26.2	20.5	15.2	6.14	
-25	129	125	119	113	106	98.3	90.6	82.7	74.8	66.8	58.7	50.5	42.3	34.3	26.9	20.8	16.2	6.26	
-20	139	134	128	120	113	104	95.8	87.2	78.6	70.0	61.4	52.7	44.0	35.5	27.7	21.1	17.1	6.38	
-15	146	141	134	126	117	108	99.3	90.2	81.1	72.1	63.1	54.1	45.1	36.2	28.1	21.2	17.1	6.32	
-10	154	148	140	132	122	113	103	93.1	83.7	74.2	64.8	55.4	46.1	37.0	28.5	21.4	17.1	6.27	
-5	157	151	143	134	124	114	104	94.1	84.3	74.7	65.2	55.7	46.3	37.0	28.4	21.3	17.1	6.67	
0	160	154	145	136	126	115	105	95.0	85.0	75.3	65.6	55.9	46.4	37.0	28.4	21.2	17.1	7.08	
5	158	152	144	134	125	114	104	94.3	84.5	74.8	65.2	55.6	46.1	36.8	28.2	21.1	17.0	9.50	
10	157	150	142	133	123	114	104	93.6	84.0	74.3	64.8	55.3	45.7	36.7	28.1	21.1	17.0	11.9	
15	150	144	137	128	119	110	100	90.8	81.5	72.2	63.0	53.8	44.6	35.7	27.4	20.7	17.0	12.4	
20	144	138	131	123	115	106	97.0	88.0	79.1	70.2	61.2	52.3	43.4	34.7	26.8	20.4	16.9	12.9	
25	134	129	123	116	108	100	92.2	83.9	75.5	67.1	58.7	50.2	41.7	33.5	26.0	20.0	16.9	12.9	
30	125	120	115	109	102	94.9	87.3	79.7	72.0	64.0	56.1	48.0	40.0	32.3	25.2	19.7	16.8	12.9	
35	114	110	105	100.0	94.1	87.7	81.0	74.1	67.1	59.8	52.5	45.0	37.6	30.5	24.1	19.2	16.7	13.1	
40	103	99.7	95.7	91.2	86.1	80.6	74.7	68.5	62.1	55.6	48.8	42.0	35.2	28.7	23.0	18.7	16.7	13.2	
45	91.5	88.9	85.5	81.7	77.4	72.7	67.5	62.1	56.5	50.6	44.6	38.5	32.5	26.8	21.9	18.2	16.6	13.3	
50	80.2	78.0	75.3	72.2	68.7	64.7	60.4	55.7	50.8	45.6	40.4	35.0	29.8	24.9	20.7	17.8	16.5	13.4	
55	68.8	67.0	64.9	62.3	59.4	56.1	52.5	48.6	44.4	40.1	35.6	31.2	26.9	22.9	19.6	17.4	16.4	13.4	
60	57.4	56.0	54.4	52.4	50.0	47.4	44.5	41.4	38.0	34.5	30.9	27.3	23.9	20.8	18.4	17.0	16.3	13.5	
65	46.1	45.1	43.9	42.4	40.7	38.8	36.6	34.2	31.7	29.1	26.4	23.8	21.3	19.2	17.6	16.7	16.2	13.5	
70	34.8	34.1	33.4	32.4	31.4	30.1	28.7	27.1	25.4	23.7	21.9	20.3	18.8	17.6	16.8	16.4	16.1	13.4	
75	24.2	23.8	23.5	23.1	22.7	22.1	21.5	20.7	20.0	19.1	18.4	17.7	17.1	16.6	16.3	16.2	16.1	13.4	
80	13.5	13.4	13.6	13.8	14.0	14.1	14.3	14.4	14.5	14.6	14.8	15.0	15.3	15.6	15.9	16.0	16.0	13.4	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks: