

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	392.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	157.7V x 173.8H
	At 50% of Imax	97.6V x 102.4H
	At 90% of Imax	36.0V x 35.2H

Beam Flux	Total	996.9 lumens per klm.
	To 10% of Imax	985.1 lumens per klm.
	To 50% of Imax	625.7 lumens per klm.
	To 90% of Imax	107.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:50.053x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010035
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

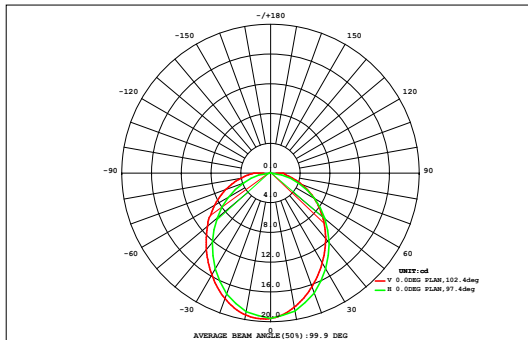

DATA OF LAMP		Eff:16.10lm/W	
MODELLS-COVE1-W40-8W-24V		Imax (cd)	19.63
NOMINAL POWER (W)	3.1	AVAILABILITY (%)	99.1
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	49.59
NOMINAL FLUX (lm)	50.053	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	50.05
TEST VOLTAGE (V)	24	θ @50% (H,V)	102,98DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.01	0.03	0.05	0.07	0.09	0.10	0.10	0.10	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	1.07	1.01
70	0.01	0.03	0.05	0.08	0.11	0.14	0.16	0.16	0.17	0.16	0.15	0.13	0.10	0.08	0.05	0.03	0.02	0.00	1.62	1.61
60	0.01	0.03	0.06	0.10	0.15	0.19	0.22	0.24	0.25	0.24	0.22	0.19	0.15	0.11	0.07	0.04	0.02	0.00	2.31	2.30
50	0.01	0.03	0.07	0.13	0.18	0.24	0.28	0.32	0.33	0.32	0.29	0.25	0.20	0.14	0.09	0.05	0.02	0.00	2.96	2.96
40	0.01	0.04	0.08	0.14	0.21	0.28	0.34	0.39	0.41	0.40	0.36	0.31	0.24	0.17	0.11	0.06	0.02	0.01	3.59	3.59
30	0.01	0.04	0.09	0.16	0.24	0.32	0.40	0.46	0.49	0.47	0.43	0.35	0.28	0.19	0.12	0.06	0.02	0.01	4.14	4.14
20	0.01	0.04	0.10	0.17	0.25	0.35	0.44	0.52	0.55	0.54	0.48	0.39	0.30	0.21	0.13	0.07	0.03	0.01	4.57	4.57
10	0.01	0.04	0.10	0.17	0.26	0.36	0.46	0.55	0.59	0.57	0.50	0.41	0.31	0.22	0.14	0.07	0.03	0.01	4.82	4.81
0	0.01	0.04	0.10	0.17	0.26	0.36	0.46	0.55	0.59	0.57	0.51	0.42	0.32	0.22	0.14	0.07	0.03	0.01	4.83	4.82
-10	0.01	0.04	0.09	0.16	0.25	0.34	0.44	0.52	0.55	0.54	0.48	0.40	0.30	0.22	0.14	0.07	0.03	0.01	4.59	4.59
-20	0.01	0.04	0.09	0.15	0.23	0.31	0.39	0.46	0.49	0.48	0.43	0.36	0.28	0.20	0.13	0.07	0.03	0.01	4.15	4.15
-30	0.01	0.04	0.08	0.14	0.21	0.27	0.34	0.39	0.41	0.40	0.37	0.31	0.24	0.17	0.11	0.06	0.02	0.00	3.57	3.57
-40	0.01	0.03	0.07	0.12	0.17	0.23	0.28	0.31	0.33	0.32	0.29	0.25	0.20	0.14	0.09	0.05	0.02	0.00	2.92	2.92
-50	0.00	0.03	0.06	0.10	0.14	0.18	0.21	0.23	0.24	0.24	0.22	0.19	0.15	0.11	0.07	0.04	0.02	0.00	2.23	2.23
-60	0.00	0.02	0.05	0.07	0.10	0.13	0.14	0.16	0.16	0.16	0.14	0.12	0.10	0.08	0.05	0.03	0.01	0.00	1.54	1.53
-70	0.00	0.02	0.04	0.05	0.07	0.08	0.08	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.89	0.76
-80	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.24	0.05
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.12	0.54	1.19	2.01	2.94	3.89	4.78	5.45	5.76	5.60	5.04	4.23	3.31	2.38	1.53	0.84	0.35	0.08	50	---
Φ a	0.10	0.54	1.19	2.01	2.93	3.88	4.76	5.43	5.73	5.57	5.01	4.20	3.28	2.35	1.50	0.79	0.30	0.03	---	50

one-half-peak spread: U:48.9,D:49.4 , L:51.6,R:49.6


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:50.053x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010035
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

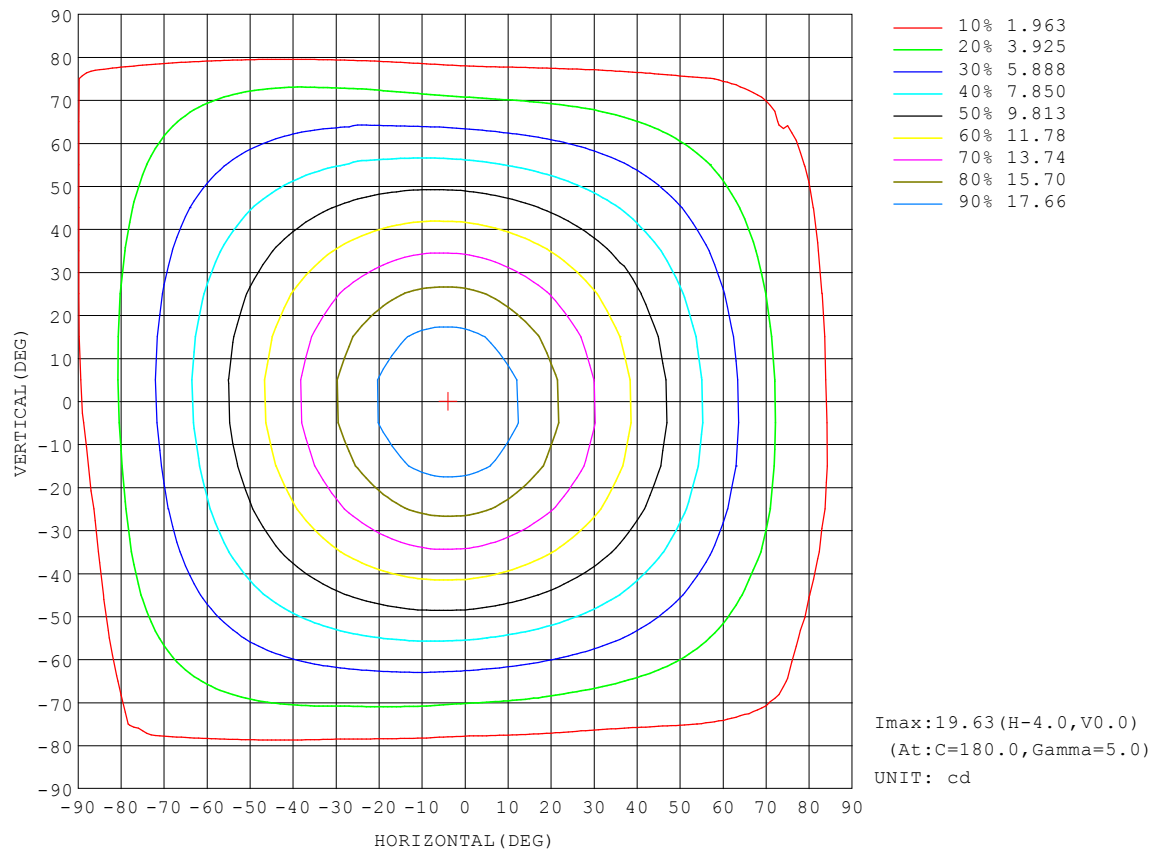


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:50.053x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010035
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

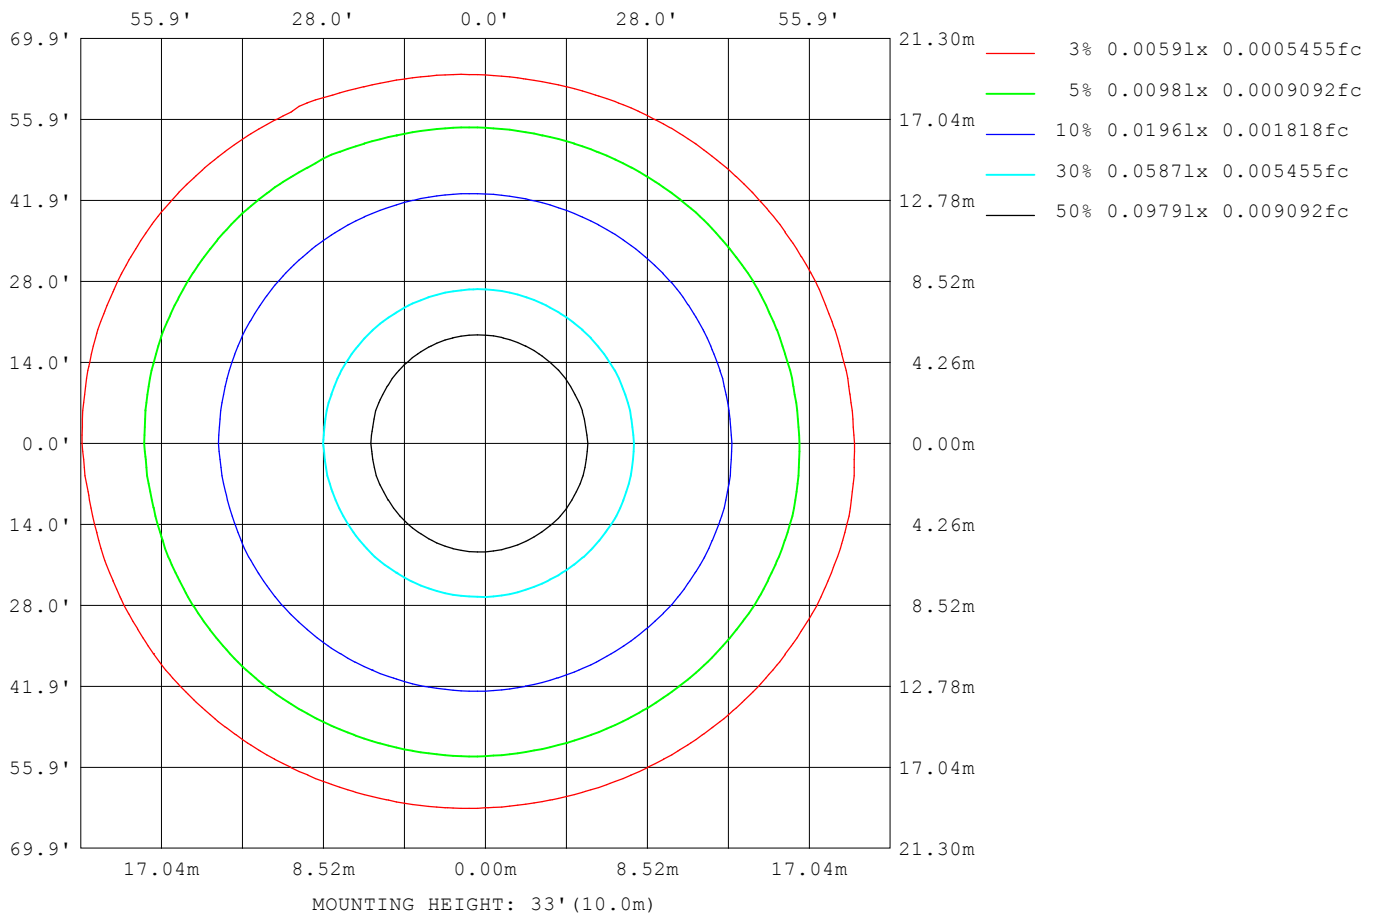


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:50.053x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010035
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

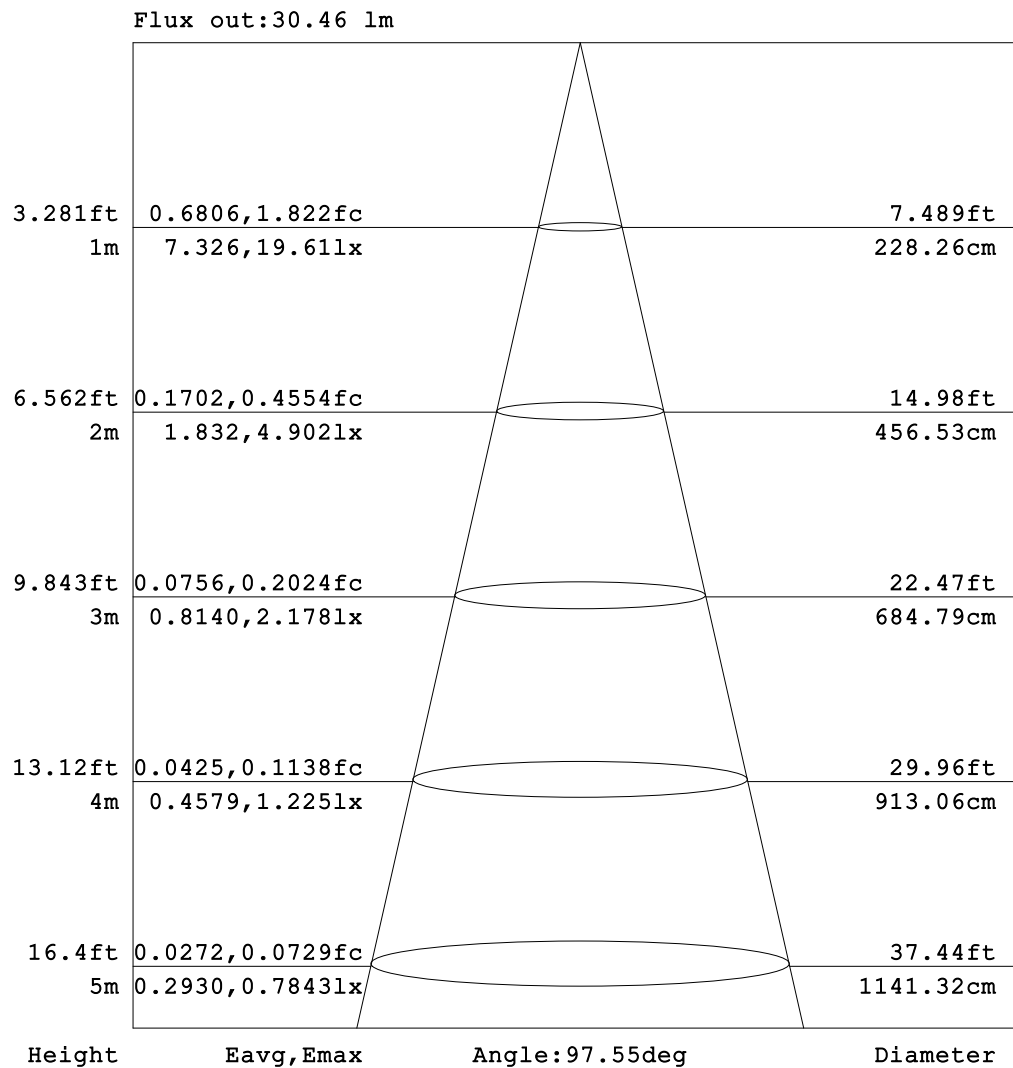


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 23.5DEG
Operators: QC1
Test Date: 2020-11-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity: 34%
Test Distance: 8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

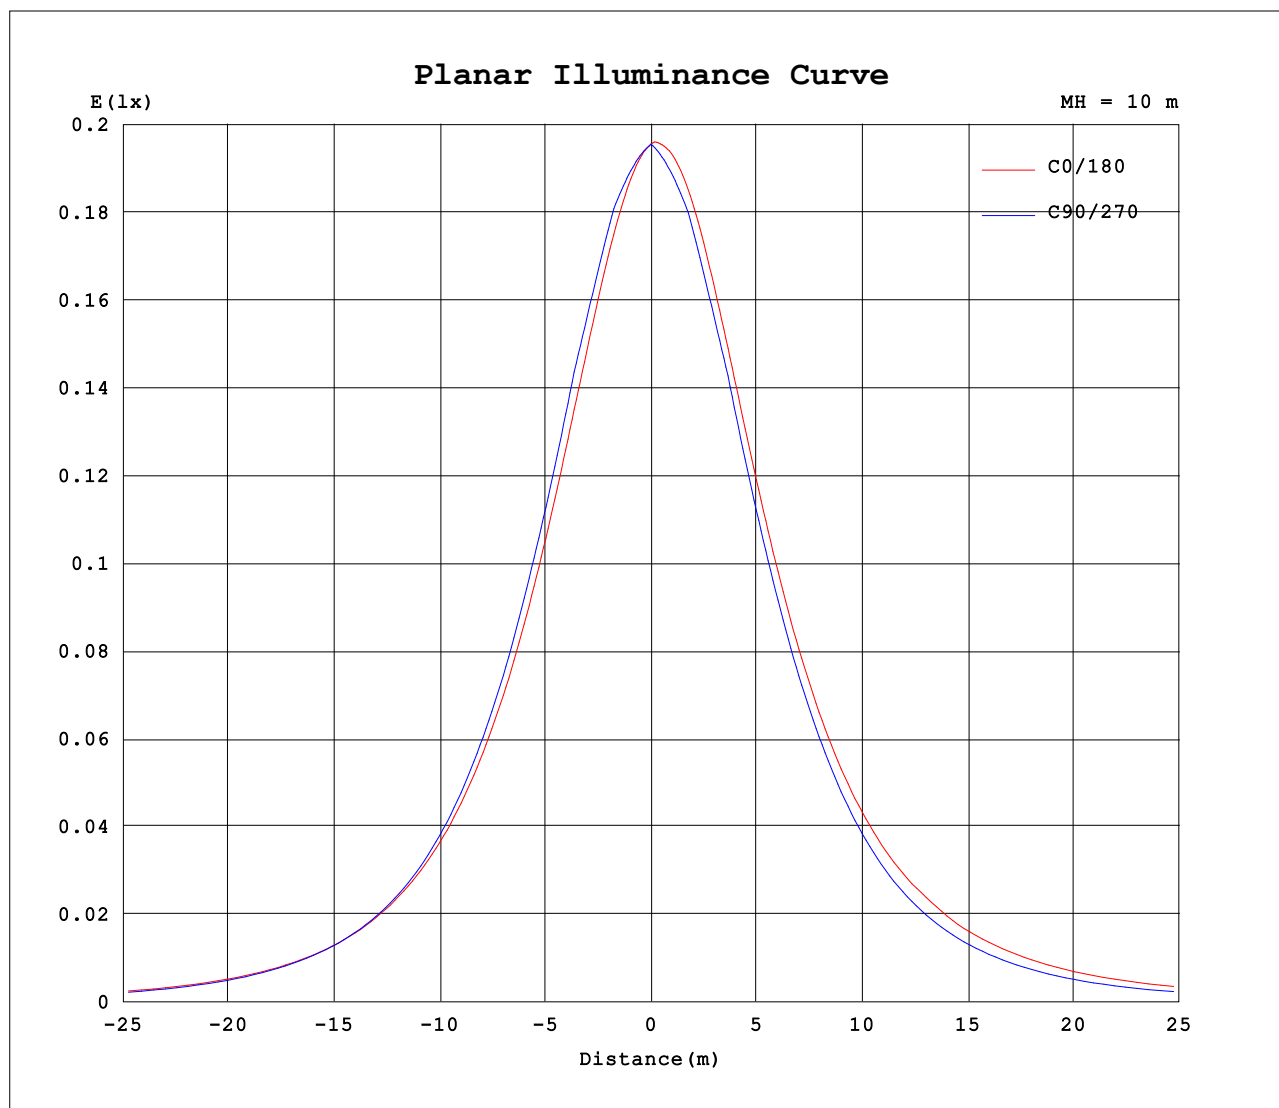

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:50.053x1 lm		
NAME: LLS-COVE1-W40-8W-24V-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010035
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.11	1.10	1.56	2.01	2.40	2.45	2.45	2.44	2.40	2.34	2.24	2.13	2.02	1.96	1.96	1.89	1.80	1.71	1.64
-75	1.07	1.17	1.71	2.33	2.74	2.87	2.97	3.05	3.10	3.13	3.12	3.09	3.04	3.01	3.00	2.96	2.92	2.82	2.73
-70	1.04	1.24	1.86	2.65	3.08	3.29	3.48	3.65	3.80	3.92	3.99	4.06	4.06	4.06	4.05	4.04	4.03	3.93	3.83
-65	1.02	1.32	2.09	2.96	3.39	3.71	4.00	4.28	4.53	4.75	4.93	5.08	5.18	5.25	5.31	5.34	5.36	5.31	5.23
-60	1.00	1.40	2.32	3.27	3.70	4.12	4.53	4.91	5.27	5.58	5.86	6.11	6.30	6.45	6.56	6.64	6.68	6.68	6.63
-55	0.88	1.56	2.49	3.52	4.04	4.57	5.08	5.56	6.03	6.43	6.81	7.15	7.43	7.66	7.83	7.97	8.05	8.05	7.99
-50	0.77	1.73	2.66	3.77	4.39	5.01	5.63	6.21	6.78	7.29	7.76	8.19	8.56	8.86	9.11	9.31	9.41	9.41	9.35
-45	0.78	1.77	3.01	3.97	4.68	5.40	6.11	6.78	7.44	8.04	8.62	9.14	9.61	10.0	10.3	10.6	10.8	10.8	10.8
-40	0.79	1.82	3.35	4.17	4.97	5.78	6.58	7.35	8.09	8.80	9.47	10.1	10.7	11.1	11.6	11.9	12.1	12.2	12.2
-35	0.83	2.03	3.50	4.36	5.24	6.12	6.99	7.84	8.68	9.48	10.2	11.0	11.6	12.2	12.8	13.2	13.5	13.6	13.6
-30	0.87	2.23	3.64	4.55	5.50	6.47	7.41	8.34	9.26	10.2	11.0	11.9	12.6	13.3	14.0	14.5	14.8	15.0	14.9
-25	0.80	2.48	3.70	4.67	5.68	6.70	7.71	8.71	9.69	10.7	11.6	12.5	13.4	14.2	15.0	15.6	16.0	16.1	16.1
-20	0.74	2.72	3.77	4.80	5.86	6.94	8.01	9.07	10.1	11.2	12.2	13.2	14.2	15.1	16.0	16.6	17.1	17.3	17.3
-15	0.82	2.85	3.87	4.93	6.03	7.14	8.24	9.35	10.4	11.6	12.6	13.7	14.8	15.8	16.7	17.4	18.0	18.2	18.1
-10	0.90	2.98	3.97	5.06	6.20	7.34	8.48	9.63	10.8	11.9	13.1	14.2	15.4	16.5	17.4	18.3	18.8	19.0	18.9
-5	0.90	3.01	4.02	5.13	6.28	7.43	8.59	9.75	10.9	12.1	13.3	14.4	15.6	16.7	17.7	18.5	19.1	19.3	19.2
0	0.91	3.04	4.08	5.20	6.36	7.53	8.70	9.87	11.1	12.3	13.4	14.6	15.8	17.0	18.0	18.8	19.4	19.6	19.6
5	1.31	3.07	4.09	5.20	6.35	7.50	8.66	9.82	11.0	12.2	13.3	14.5	15.6	16.7	17.7	18.5	19.1	19.3	19.2
10	1.71	3.09	4.10	5.20	6.34	7.48	8.62	9.77	10.9	12.1	13.2	14.3	15.5	16.5	17.5	18.3	18.8	19.0	18.8
15	1.78	3.07	4.06	5.13	6.24	7.35	8.45	9.56	10.6	11.7	12.8	13.9	14.9	15.9	16.8	17.5	18.0	18.1	18.0
20	1.84	3.05	4.02	5.06	6.14	7.21	8.28	9.34	10.4	11.4	12.4	13.4	14.4	15.3	16.1	16.7	17.1	17.3	17.2
25	1.86	3.04	3.96	4.95	5.98	7.00	8.00	8.99	9.97	10.9	11.9	12.8	13.6	14.4	15.1	15.6	16.0	16.1	16.0
30	1.88	3.03	3.90	4.84	5.81	6.78	7.72	8.65	9.56	10.4	11.3	12.1	12.8	13.5	14.1	14.6	14.9	14.9	14.8
35	1.88	2.97	3.77	4.65	5.55	6.45	7.32	8.17	8.98	9.77	10.5	11.2	11.9	12.4	12.9	13.3	13.6	13.6	13.5
40	1.88	2.90	3.64	4.46	5.29	6.11	6.92	7.68	8.41	9.11	9.76	10.4	10.9	11.4	11.8	12.1	12.2	12.3	12.2
45	1.89	2.87	3.54	4.27	5.01	5.74	6.46	7.14	7.78	8.38	8.94	9.43	9.88	10.3	10.6	10.8	10.9	10.9	10.9
50	1.90	2.84	3.43	4.08	4.73	5.37	6.00	6.59	7.15	7.65	8.11	8.52	8.86	9.15	9.38	9.54	9.60	9.59	9.49
55	1.89	2.75	3.27	3.82	4.37	4.92	5.45	5.94	6.41	6.81	7.19	7.50	7.76	8.03	8.14	8.23	8.26	8.25	8.15
60	1.89	2.65	3.10	3.56	4.02	4.47	4.90	5.30	5.66	5.98	6.27	6.48	6.66	6.92	6.90	6.91	6.92	6.90	6.82
65	1.90	2.61	2.97	3.34	3.70	4.05	4.38	4.68	4.95	5.17	5.37	5.49	5.58	5.70	5.68	5.63	5.58	5.52	5.43
70	1.91	2.57	2.84	3.12	3.38	3.62	3.86	4.06	4.23	4.36	4.47	4.49	4.49	4.47	4.45	4.35	4.24	4.14	4.05
75	1.91	2.47	2.67	2.86	3.03	3.17	3.31	3.42	3.50	3.55	3.56	3.53	3.46	3.38	3.29	3.15	3.02	2.89	2.79
80	1.91	2.38	2.51	2.60	2.69	2.72	2.76	2.78	2.78	2.73	2.66	2.57	2.44	2.29	2.13	1.96	1.79	1.64	1.54
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1295A P:3.108W PF:1.000 Lamp Flux:50.053x1 lm																		
NAME: LLS-COVE1-W40-8W-24V-B									TYPE:LED					WEIGHT:				
DIM.:									SPEC.:					SERIAL No.:202010035				
MFR.: 中山市泰然光电科技有限公司									SUR.:					PROTECTION ANGLE:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.63	1.60	1.59	1.56	1.48	1.41	1.40	1.41	1.45	1.51	1.55	1.61	1.64	1.69	1.50	1.17	0.84	0.91	
-75	2.70	2.65	2.58	2.49	2.38	2.28	2.21	2.14	2.07	2.02	1.95	1.90	1.84	1.81	1.63	1.20	0.85	0.87	
-70	3.76	3.69	3.58	3.43	3.28	3.14	3.01	2.86	2.70	2.52	2.36	2.19	2.04	1.93	1.77	1.23	0.85	0.84	
-65	5.14	5.02	4.87	4.69	4.48	4.27	4.04	3.78	3.51	3.23	2.95	2.67	2.40	2.17	1.94	1.39	0.92	0.82	
-60	6.51	6.36	6.17	5.94	5.68	5.39	5.06	4.70	4.33	3.94	3.54	3.14	2.75	2.40	2.12	1.54	0.99	0.79	
-55	7.85	7.66	7.43	7.15	6.81	6.44	6.04	5.59	5.13	4.62	4.12	3.61	3.10	2.64	2.24	1.65	1.05	0.70	
-50	9.19	8.96	8.69	8.35	7.94	7.50	7.01	6.48	5.92	5.31	4.69	4.07	3.46	2.88	2.37	1.77	1.10	0.60	
-45	10.6	10.3	9.97	9.55	9.07	8.54	7.95	7.33	6.67	5.98	5.27	4.55	3.84	3.16	2.55	1.98	1.17	0.61	
-40	12.0	11.7	11.3	10.8	10.2	9.57	8.90	8.18	7.42	6.65	5.85	5.03	4.22	3.44	2.74	2.19	1.23	0.62	
-35	13.3	12.9	12.4	11.8	11.2	10.5	9.69	8.89	8.05	7.19	6.31	5.42	4.53	3.71	2.87	2.24	1.45	0.63	
-30	14.6	14.2	13.6	12.9	12.2	11.3	10.5	9.60	8.67	7.73	6.78	5.81	4.84	3.99	3.00	2.28	1.67	0.64	
-25	15.8	15.3	14.6	13.8	13.0	12.1	11.1	10.2	9.17	8.15	7.14	6.11	5.08	4.12	3.13	2.36	1.80	0.66	
-20	17.0	16.4	15.6	14.8	13.8	12.8	11.8	10.7	9.66	8.58	7.50	6.41	5.33	4.25	3.27	2.44	1.94	0.67	
-15	17.8	17.1	16.3	15.3	14.3	13.2	12.1	11.0	9.92	8.80	7.68	6.56	5.43	4.33	3.30	2.44	1.91	0.66	
-10	18.5	17.8	17.0	15.9	14.8	13.7	12.5	11.4	10.2	9.02	7.86	6.71	5.54	4.40	3.33	2.44	1.89	0.65	
-5	18.8	18.1	17.2	16.1	15.0	13.8	12.6	11.4	10.3	9.09	7.91	6.74	5.57	4.42	3.34	2.45	1.91	0.71	
0	19.1	18.3	17.4	16.3	15.1	13.9	12.7	11.5	10.3	9.15	7.96	6.77	5.59	4.43	3.34	2.46	1.92	0.77	
5	18.7	18.0	17.1	16.0	14.9	13.7	12.6	11.4	10.2	9.04	7.87	6.69	5.52	4.37	3.29	2.41	1.89	1.05	
10	18.4	17.7	16.8	15.8	14.7	13.5	12.4	11.2	10.1	8.93	7.77	6.61	5.45	4.30	3.24	2.36	1.86	1.33	
15	17.6	17.0	16.1	15.2	14.1	13.1	12.0	10.9	9.79	8.68	7.56	6.43	5.31	4.20	3.18	2.34	1.88	1.39	
20	16.8	16.2	15.4	14.6	13.6	12.6	11.6	10.5	9.50	8.43	7.34	6.25	5.17	4.09	3.12	2.32	1.90	1.45	
25	15.7	15.1	14.4	13.7	12.8	11.9	11.0	10.0	9.01	8.01	6.99	5.96	4.93	3.91	2.99	2.25	1.86	1.44	
30	14.5	14.0	13.4	12.7	12.0	11.2	10.3	9.48	8.53	7.58	6.64	5.66	4.69	3.73	2.86	2.18	1.82	1.43	
35	13.3	12.9	12.3	11.7	11.1	10.4	9.59	8.80	7.95	7.08	6.20	5.30	4.40	3.52	2.74	2.14	1.85	1.45	
40	12.0	11.7	11.2	10.7	10.1	9.51	8.83	8.11	7.36	6.58	5.76	4.93	4.12	3.32	2.63	2.10	1.87	1.47	
45	10.7	10.4	10.00	9.57	9.07	8.53	7.95	7.32	6.65	5.95	5.22	4.49	3.76	3.06	2.46	2.02	1.83	1.48	
50	9.31	9.06	8.77	8.42	8.01	7.55	7.06	6.52	5.95	5.31	4.68	4.04	3.40	2.80	2.29	1.94	1.79	1.48	
55	8.00	7.79	7.55	7.27	6.93	6.55	6.13	5.67	5.19	4.66	4.13	3.59	3.07	2.58	2.18	1.92	1.81	1.49	
60	6.69	6.53	6.34	6.11	5.85	5.55	5.20	4.83	4.43	4.01	3.58	3.14	2.73	2.36	2.07	1.89	1.83	1.50	
65	5.32	5.20	5.06	4.90	4.70	4.49	4.21	3.93	3.64	3.31	3.00	2.68	2.38	2.12	1.94	1.84	1.78	1.49	
70	3.95	3.88	3.79	3.69	3.55	3.43	3.22	3.03	2.85	2.62	2.41	2.21	2.03	1.89	1.81	1.79	1.74	1.47	
75	2.72	2.68	2.63	2.59	2.53	2.48	2.38	2.29	2.20	2.09	2.01	1.91	1.84	1.79	1.76	1.75	1.73	1.48	
80	1.49	1.48	1.48	1.48	1.50	1.54	1.54	1.54	1.55	1.56	1.60	1.62	1.64	1.69	1.70	1.72	1.72	1.49	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks: