

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	394.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	157.0V x 178.2H
	At 50% of Imax	96.5V x 101.6H
	At 90% of Imax	35.4V x 35.1H

Beam Flux	Total	996.9 lumens per klm.
	To 10% of Imax	987.3 lumens per klm.
	To 50% of Imax	617.5 lumens per klm.
	To 90% of Imax	107.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.1264A P:3.034W PF:1.000 Lamp Flux:164.571x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010034
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

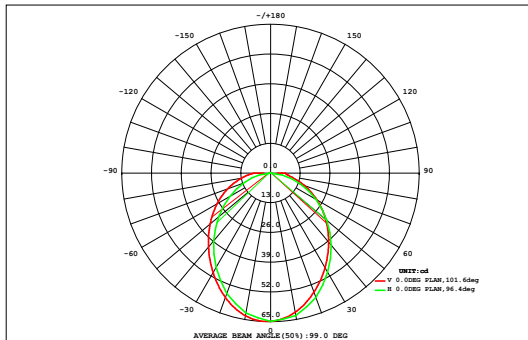

DATA OF LAMP		Eff:54.25lm/W	
MODELLS-COVE1-W40-8W-24V		Imax(cd)	64.85
NOMINAL POWER(W)	3	AVAILABILITY(%)	99.3
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	163.4
NOMINAL FLUX(lm)	164.571	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	164.6
TEST VOLTAGE(V)	24	θ @50%(H,V)	102,96DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.03	0.09	0.16	0.22	0.28	0.32	0.33	0.33	0.31	0.29	0.28	0.26	0.23	0.19	0.15	0.11	0.06	0.02	3.66	3.57
70	0.02	0.09	0.17	0.26	0.36	0.44	0.51	0.54	0.56	0.54	0.51	0.45	0.37	0.28	0.19	0.11	0.06	0.02	5.47	5.47
60	0.02	0.10	0.20	0.33	0.47	0.60	0.71	0.79	0.83	0.82	0.76	0.66	0.53	0.39	0.26	0.14	0.06	0.02	7.71	7.71
50	0.03	0.11	0.24	0.40	0.58	0.76	0.92	1.05	1.11	1.09	1.01	0.86	0.69	0.50	0.32	0.17	0.07	0.02	9.91	9.91
40	0.03	0.12	0.26	0.45	0.67	0.90	1.12	1.29	1.38	1.36	1.24	1.06	0.83	0.60	0.38	0.20	0.08	0.02	12.0	12.0
30	0.03	0.13	0.28	0.50	0.75	1.02	1.29	1.52	1.63	1.61	1.46	1.22	0.95	0.68	0.43	0.23	0.09	0.02	13.8	13.8
	0.03	0.13	0.30	0.53	0.80	1.11	1.42	1.69	1.84	1.81	1.63	1.35	1.04	0.73	0.46	0.24	0.09	0.02	15.2	15.2
	0.03	0.13	0.30	0.54	0.83	1.15	1.49	1.78	1.94	1.92	1.72	1.42	1.09	0.76	0.48	0.25	0.10	0.02	16.0	16.0
	0.03	0.13	0.30	0.53	0.82	1.14	1.48	1.77	1.93	1.91	1.71	1.41	1.08	0.76	0.48	0.25	0.10	0.02	15.9	15.9
	0.03	0.12	0.29	0.51	0.78	1.08	1.38	1.64	1.79	1.78	1.61	1.34	1.04	0.74	0.47	0.25	0.10	0.02	14.9	14.9
-30	0.02	0.12	0.27	0.47	0.71	0.98	1.23	1.45	1.57	1.56	1.42	1.20	0.94	0.67	0.43	0.23	0.09	0.02	13.4	13.4
-40	0.02	0.11	0.25	0.43	0.63	0.85	1.05	1.22	1.31	1.30	1.19	1.02	0.81	0.59	0.38	0.21	0.08	0.02	11.5	11.5
-50	0.02	0.10	0.22	0.37	0.54	0.70	0.86	0.97	1.03	1.03	0.95	0.82	0.66	0.49	0.32	0.18	0.08	0.01	9.34	9.33
-60	0.02	0.09	0.19	0.30	0.43	0.55	0.65	0.73	0.76	0.76	0.70	0.62	0.50	0.38	0.25	0.14	0.07	0.01	7.14	7.11
-70	0.01	0.07	0.15	0.23	0.32	0.39	0.45	0.49	0.50	0.49	0.46	0.41	0.34	0.26	0.18	0.11	0.06	0.01	4.93	4.90
-80	0.01	0.06	0.12	0.17	0.21	0.24	0.26	0.27	0.26	0.25	0.24	0.21	0.19	0.16	0.12	0.09	0.05	0.01	2.91	2.57
-90	0.01	0.03	0.05	0.06	0.07	0.07	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.02	0.00	0.81	0.15
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.38	1.72	3.74	6.30	9.22	12.3	15.2	17.6	18.8	18.6	17.0	14.4	11.3	8.22	5.34	2.95	1.26	0.29	165	---
Φ a	0.33	1.70	3.74	6.28	9.19	12.2	15.2	17.5	18.7	18.5	16.9	14.3	11.2	8.12	5.27	2.90	1.20	0.23	---	163

one-half-peak spread: U:47.3,D:49.9 , L:52.3,R:50.2


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.1264A P:3.034W PF:1.000 Lamp Flux:164.571x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010034
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

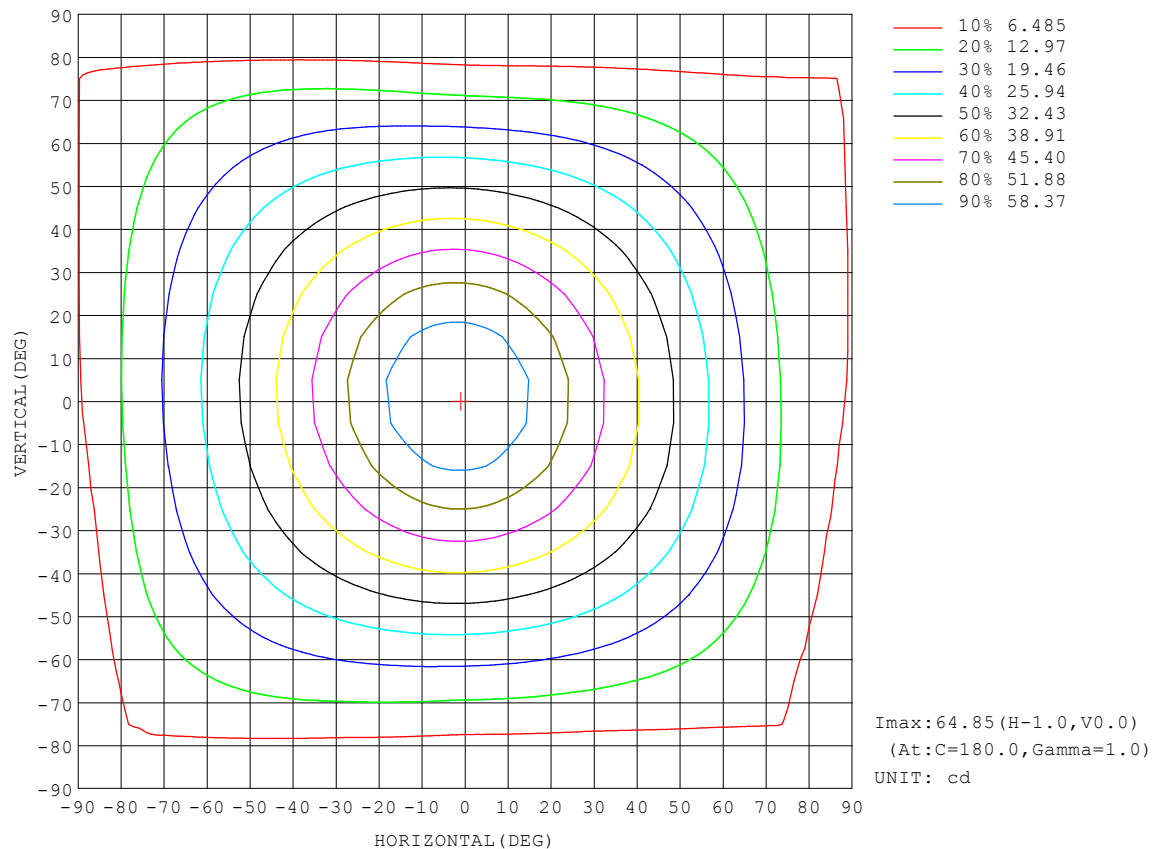


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.1264A P:3.034W PF:1.000 Lamp Flux:164.571x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010034
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

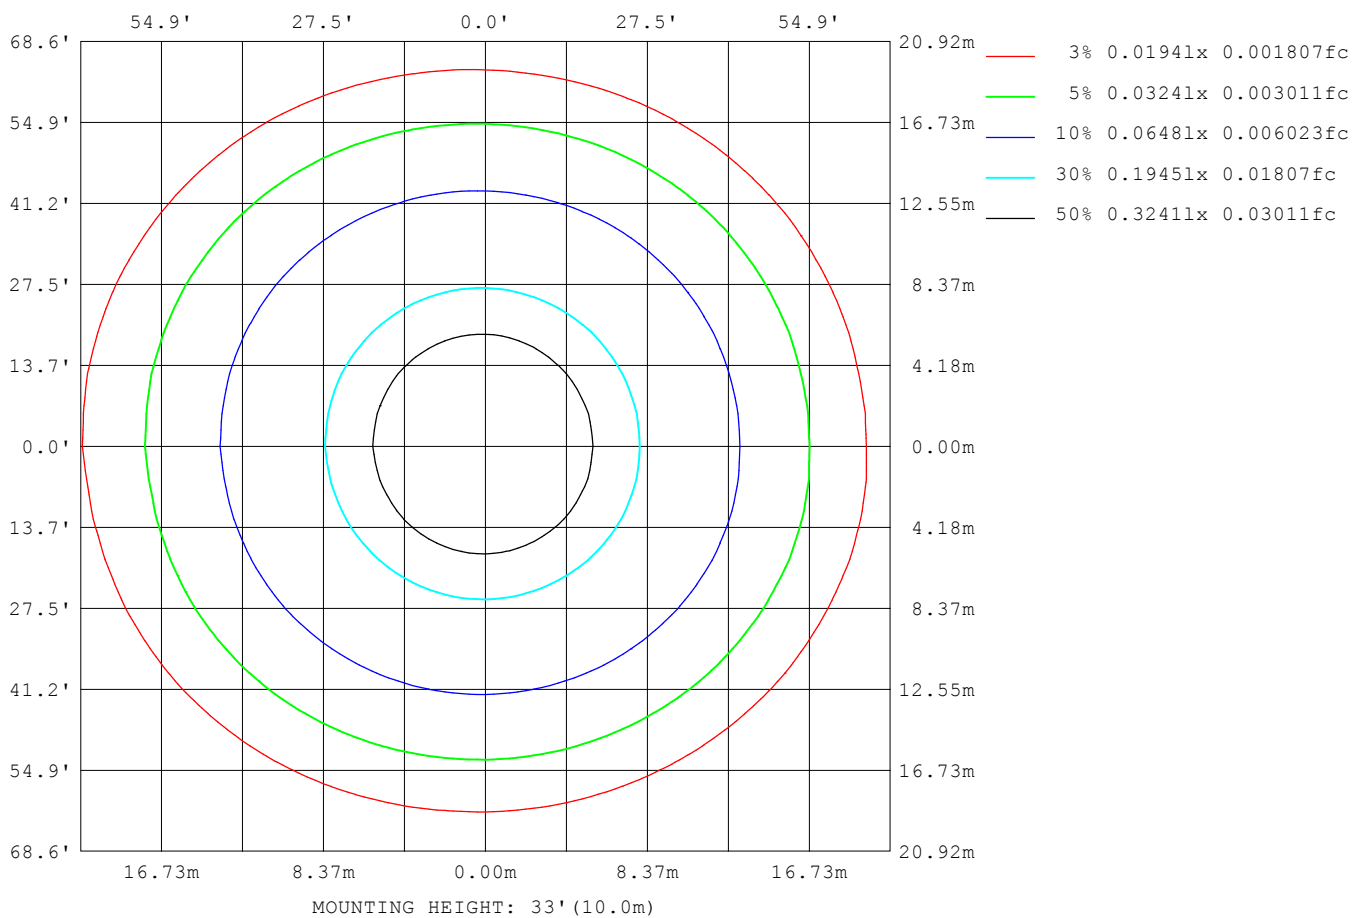


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.1264A P:3.034W PF:1.000 Lamp Flux:164.57lx1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010034
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

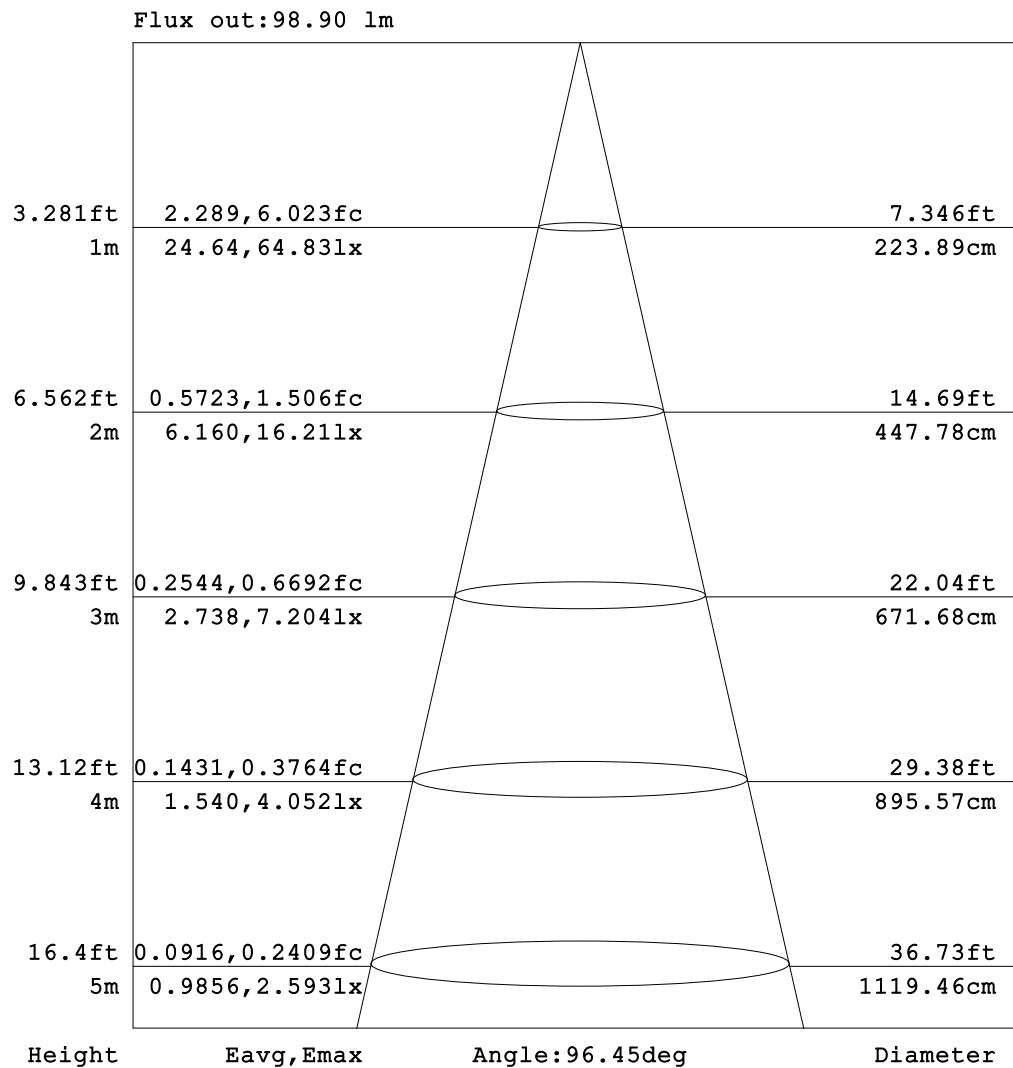


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

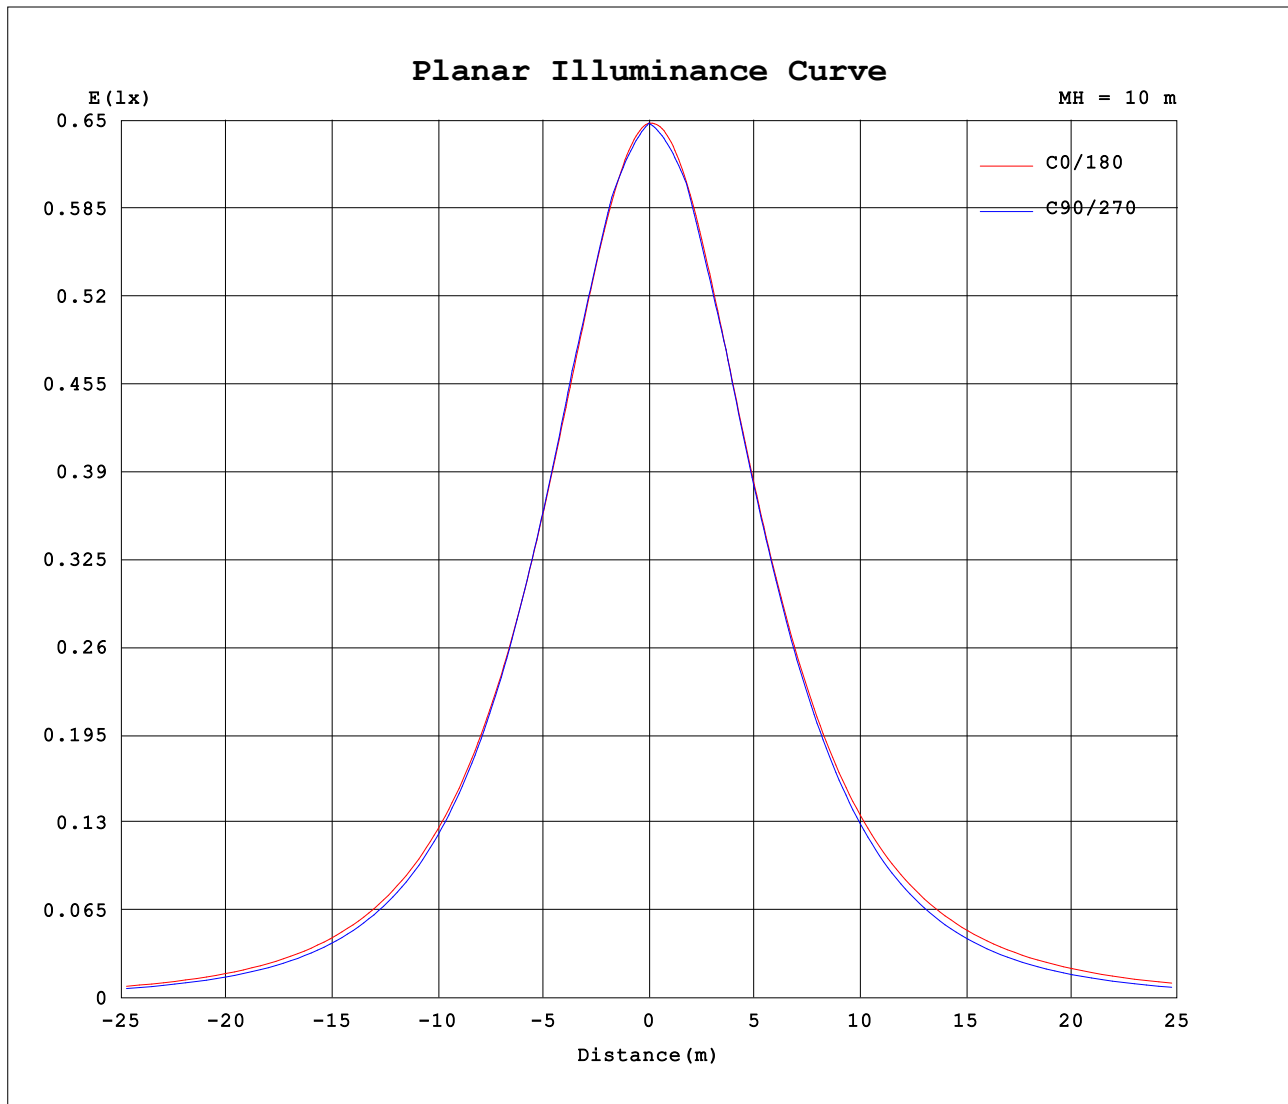

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1264A P:3.034W PF:1.000 Lamp Flux:164.571x1 lm		
NAME: LLS-COVE1-W40-8W-24V-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202010034
MFR.: 中山市泰然光电科技有限公司	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	3.72	3.85	5.27	6.70	7.87	7.90	7.90	7.82	7.65	7.42	7.13	6.79	6.43	6.19	6.14	5.92	5.62	5.33	5.16
-75	3.62	3.96	5.65	7.59	8.81	9.13	9.41	9.60	9.73	9.77	9.75	9.67	9.53	9.42	9.38	9.23	9.05	8.78	8.61
-70	3.52	4.07	6.03	8.48	9.75	10.4	10.9	11.4	11.8	12.1	12.4	12.5	12.6	12.6	12.6	12.5	12.5	12.2	12.1
-65	3.45	4.40	6.82	9.48	10.8	11.7	12.5	13.3	14.1	14.7	15.3	15.7	16.1	16.3	16.5	16.6	16.6	16.5	16.4
-60	3.38	4.72	7.61	10.5	11.8	13.0	14.2	15.3	16.4	17.3	18.1	18.9	19.5	20.0	20.3	20.6	20.8	20.8	20.8
-55	2.99	5.18	8.07	11.2	12.7	14.3	15.8	17.2	18.6	19.9	21.0	22.0	22.9	23.7	24.3	24.7	25.1	25.2	25.2
-50	2.60	5.64	8.54	11.9	13.7	15.6	17.4	19.2	20.8	22.4	23.9	25.2	26.3	27.3	28.2	28.9	29.4	29.7	29.6
-45	2.61	5.86	9.62	12.5	14.7	16.8	18.9	21.0	22.9	24.8	26.5	28.2	29.7	31.0	32.1	33.1	33.8	34.2	34.2
-40	2.62	6.09	10.7	13.2	15.6	18.0	20.4	22.7	25.0	27.2	29.2	31.2	33.0	34.6	36.1	37.3	38.2	38.7	38.8
-35	2.75	6.66	11.1	13.7	16.3	19.0	21.6	24.2	26.8	29.2	31.6	33.9	36.1	38.1	39.9	41.4	42.5	43.2	43.3
-30	2.87	7.23	11.5	14.2	17.1	20.0	22.9	25.7	28.5	31.3	34.0	36.6	39.2	41.5	43.7	45.5	46.9	47.7	47.8
-25	2.90	8.04	11.8	14.7	17.7	20.8	23.9	26.9	30.0	33.0	36.0	38.9	41.8	44.6	47.1	49.2	50.8	51.7	51.9
-20	2.94	8.85	12.0	15.1	18.4	21.6	24.9	28.2	31.4	34.7	38.0	41.3	44.5	47.6	50.4	52.9	54.7	55.8	56.0
-15	2.97	9.18	12.3	15.5	18.8	22.2	25.6	29.0	32.4	35.9	39.4	42.9	46.4	49.8	52.9	55.6	57.7	58.9	59.1
-10	3.01	9.51	12.5	15.8	19.2	22.7	26.2	29.8	33.4	37.0	40.8	44.5	48.3	52.0	55.4	58.4	60.6	61.9	62.1
-5	3.03	9.67	12.7	16.1	19.6	23.1	26.7	30.3	34.0	37.7	41.5	45.4	49.3	53.1	56.7	59.7	62.0	63.3	63.5
0	3.06	9.82	12.9	16.4	19.9	23.5	27.1	30.8	34.5	38.4	42.3	46.3	50.3	54.2	57.9	61.0	63.3	64.6	64.8
5	4.28	9.83	12.9	16.3	19.8	23.4	27.0	30.6	34.3	38.1	42.0	45.9	49.8	53.7	57.3	60.3	62.6	63.9	64.0
10	5.50	9.84	12.8	16.3	19.7	23.3	26.8	30.4	34.1	37.8	41.6	45.5	49.4	53.1	56.6	59.6	61.9	63.1	63.2
15	5.72	9.84	12.8	16.1	19.5	23.0	26.4	29.9	33.4	37.0	40.6	44.2	47.8	51.4	54.6	57.3	59.3	60.4	60.5
20	5.94	9.84	12.8	16.0	19.3	22.6	26.0	29.3	32.7	36.1	39.5	42.9	46.3	49.6	52.5	55.0	56.8	57.8	57.9
25	6.02	9.77	12.5	15.6	18.7	21.9	25.1	28.2	31.4	34.5	37.7	40.8	43.8	46.7	49.3	51.5	53.1	53.9	54.0
30	6.10	9.69	12.3	15.2	18.2	21.2	24.2	27.1	30.1	33.0	35.8	38.6	41.3	43.8	46.1	48.0	49.4	50.1	50.0
35	6.09	9.57	12.0	14.7	17.5	20.3	23.0	25.7	28.4	31.0	33.5	36.0	38.3	40.4	42.4	43.9	45.1	45.6	45.6
40	6.08	9.44	11.7	14.2	16.8	19.4	21.9	24.3	26.7	29.0	31.3	33.4	35.3	37.1	38.6	39.9	40.8	41.2	41.2
45	6.12	9.27	11.3	13.5	15.8	18.1	20.4	22.6	24.7	26.7	28.6	30.3	31.9	33.4	34.6	35.6	36.3	36.6	36.6
50	6.15	9.09	10.9	12.9	14.9	16.9	18.9	20.8	22.6	24.3	25.9	27.3	28.6	29.7	30.6	31.3	31.8	32.0	31.9
55	6.15	8.90	10.5	12.2	13.9	15.6	17.3	18.9	20.4	21.8	23.0	24.2	25.1	25.9	26.6	27.1	27.4	27.5	27.4
60	6.16	8.70	10.0	11.5	12.9	14.3	15.7	17.0	18.2	19.2	20.2	21.0	21.7	22.2	22.5	22.8	22.9	23.0	22.8
65	6.19	8.52	9.60	10.7	11.9	13.0	14.0	15.0	15.8	16.6	17.3	17.8	18.2	18.4	18.6	18.6	18.6	18.5	18.3
70	6.22	8.33	9.17	10.0	10.8	11.6	12.3	13.0	13.5	14.0	14.4	14.6	14.7	14.7	14.6	14.4	14.2	14.0	13.8
75	6.21	8.10	8.69	9.26	9.78	10.3	10.7	11.0	11.3	11.4	11.5	11.5	11.3	11.1	10.8	10.5	10.1	9.76	9.51
80	6.21	7.86	8.21	8.50	8.74	8.90	8.98	9.03	8.99	8.85	8.62	8.33	7.97	7.54	7.06	6.53	5.99	5.54	5.25
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1264A P:3.034W PF:1.000 Lamp Flux:164.571x1 lm																		
NAME: LLS-COVE1-W40-8W-24V-G									TYPE:LED					WEIGHT:				
DIM.:									SPEC.:					SERIAL No.:202010034				
MFR.: 中山市泰然光电科技有限公司									SUR.:					PROTECTION ANGLE:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	5.17	5.12	5.12	5.10	5.00	4.93	5.03	5.23	5.43	5.63	5.82	6.03	6.21	6.38	5.59	4.41	3.24	3.58	
-75	8.56	8.48	8.37	8.20	7.98	7.79	7.66	7.56	7.44	7.30	7.15	7.01	6.88	6.78	6.11	4.59	3.29	3.41	
-70	11.9	11.8	11.6	11.3	11.0	10.7	10.3	9.88	9.45	8.97	8.48	7.99	7.55	7.17	6.64	4.77	3.35	3.24	
-65	16.3	16.1	15.7	15.3	14.8	14.2	13.6	12.8	12.1	11.2	10.4	9.50	8.67	7.92	7.18	5.24	3.55	3.19	
-60	20.6	20.3	19.9	19.3	18.6	17.8	16.8	15.8	14.7	13.5	12.3	11.0	9.79	8.66	7.73	5.71	3.75	3.13	
-55	25.0	24.6	24.0	23.3	22.4	21.3	20.1	18.8	17.4	15.8	14.3	12.6	11.0	9.53	8.25	6.20	4.05	2.79	
-50	29.4	28.8	28.1	27.2	26.1	24.9	23.4	21.8	20.1	18.2	16.2	14.3	12.3	10.4	8.76	6.69	4.34	2.46	
-45	33.9	33.2	32.3	31.2	29.8	28.2	26.5	24.6	22.5	20.4	18.1	15.8	13.5	11.3	9.29	7.35	4.48	2.42	
-40	38.4	37.6	36.5	35.1	33.5	31.6	29.6	27.4	25.0	22.5	19.9	17.3	14.7	12.1	9.82	8.01	4.61	2.37	
-35	42.9	41.9	40.6	38.9	37.0	34.8	32.4	29.9	27.2	24.5	21.6	18.7	15.8	12.9	10.3	8.25	5.47	2.45	
-30	47.3	46.2	44.6	42.7	40.4	37.9	35.2	32.4	29.4	26.4	23.3	20.1	16.9	13.7	10.9	8.49	6.32	2.52	
-25	51.3	50.1	48.2	46.0	43.4	40.5	37.5	34.4	31.1	27.8	24.5	21.1	17.7	14.3	11.2	8.68	6.75	2.58	
-20	55.4	54.0	51.8	49.2	46.3	43.1	39.8	36.3	32.8	29.3	25.7	22.1	18.4	14.9	11.6	8.87	7.18	2.64	
-15	58.4	56.8	54.4	51.5	48.3	44.8	41.2	37.6	33.9	30.2	26.4	22.7	18.9	15.2	11.8	8.93	7.16	2.59	
-10	61.3	59.6	57.0	53.8	50.3	46.6	42.7	38.9	34.9	31.0	27.2	23.3	19.4	15.5	12.0	8.98	7.13	2.53	
-5	62.6	60.7	57.9	54.6	51.0	47.1	43.2	39.2	35.2	31.2	27.3	23.3	19.4	15.5	11.9	8.94	7.13	2.72	
0	63.8	61.8	58.9	55.4	51.7	47.7	43.6	39.5	35.5	31.4	27.4	23.4	19.4	15.5	11.9	8.89	7.13	2.90	
5	63.0	61.0	58.2	54.9	51.2	47.3	43.2	39.2	35.2	31.2	27.2	23.2	19.3	15.4	11.9	8.83	7.09	3.92	
10	62.2	60.3	57.6	54.3	50.7	46.8	42.9	38.9	34.9	31.0	27.0	23.1	19.1	15.3	11.9	8.76	7.05	4.93	
15	59.6	57.8	55.3	52.2	48.8	45.2	41.4	37.7	33.9	30.1	26.2	22.4	18.6	14.9	11.5	8.62	7.04	5.13	
20	57.0	55.3	52.9	50.1	46.9	43.5	40.0	36.4	32.8	29.1	25.4	21.7	18.0	14.4	11.1	8.48	7.03	5.33	
25	53.2	51.7	49.6	47.1	44.2	41.2	37.9	34.6	31.2	27.8	24.3	20.8	17.3	13.9	10.8	8.30	6.98	5.33	
30	49.4	48.1	46.3	44.1	41.6	38.8	35.9	32.8	29.7	26.5	23.2	19.9	16.6	13.4	10.4	8.13	6.93	5.33	
35	45.0	43.9	42.3	40.4	38.2	35.8	33.2	30.5	27.6	24.7	21.7	18.6	15.5	12.6	9.97	7.92	6.91	5.38	
40	40.7	39.7	38.4	36.8	34.9	32.8	30.5	28.1	25.5	22.9	20.1	17.3	14.5	11.8	9.49	7.72	6.89	5.43	
45	36.1	35.3	34.2	32.9	31.3	29.5	27.5	25.4	23.1	20.8	18.3	15.8	13.4	11.0	8.99	7.50	6.83	5.45	
50	31.6	30.9	30.0	29.0	27.7	26.2	24.5	22.7	20.7	18.7	16.5	14.4	12.2	10.2	8.50	7.28	6.76	5.46	
55	27.1	26.5	25.8	25.0	23.9	22.7	21.3	19.8	18.1	16.4	14.6	12.8	11.0	9.39	8.04	7.15	6.74	5.50	
60	22.6	22.1	21.6	20.9	20.1	19.2	18.0	16.8	15.5	14.1	12.6	11.2	9.81	8.57	7.59	7.01	6.73	5.54	
65	18.1	17.8	17.4	16.9	16.3	15.6	14.8	13.9	12.9	11.8	10.8	9.72	8.73	7.89	7.22	6.86	6.67	5.50	
70	13.6	13.4	13.1	12.9	12.5	12.1	11.5	10.9	10.3	9.59	8.91	8.25	7.65	7.22	6.86	6.72	6.61	5.46	
75	9.37	9.27	9.22	9.13	9.01	8.84	8.62	8.35	8.07	7.77	7.46	7.19	6.94	6.79	6.66	6.61	6.56	5.47	
80	5.16	5.16	5.28	5.39	5.53	5.62	5.70	5.78	5.86	5.94	6.02	6.12	6.23	6.37	6.46	6.51	6.51	5.47	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:23.5DEG
Operators:QC1
Test Date:2020-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:34%
Test Distance:8.300m [K=1.0000]
Remarks: