

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1385.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	91.1V x 91.4H
	At 50% of Imax	47.7V x 35.0H
	At 90% of Imax	17.6V x 13.2H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	851.6 lumens per klm.
	To 50% of Imax	389.1 lumens per klm.
	To 90% of Imax	70.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.4V I:0.0607A P:7.602W PF:0.5192 Lamp Flux:283.901x1 lm		
NAME: 8.02.003.0402 20X40°LLS-COVE2-W40-L3-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500085
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

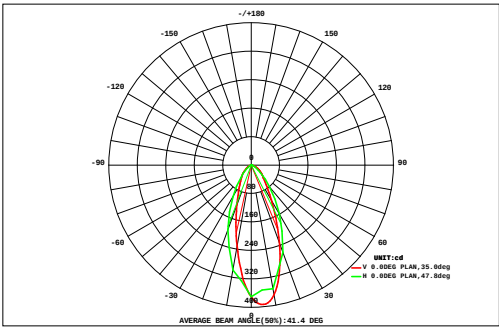

DATA OF LAMP		Eff:37.35lm/W	
MODELLS-COVE2-W40-L3-DMX	Imax(cd)	393.2	
NOMINAL POWER(W)	8	AVAILABILITY(%)	85.3
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	242.1
NOMINAL FLUX(lm)	283.901	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	283.9
TEST VOLTAGE(V)	241.4	θ @50%(H,V)	35,48DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.00	0.02	0.07	0.10	0.11	0.09	0.08	0.12	0.14	0.14	0.11	0.07	0.03	0.01	0.00	1.09	0.00
	64	0.00	0.00	0.01	0.04	0.10	0.18	0.23	0.26	0.27	0.28	0.29	0.29	0.27	0.23	0.15	0.09	0.04	0.01	2.75	0.00
	56	0.00	0.01	0.04	0.10	0.21	0.32	0.41	0.48	0.54	0.57	0.58	0.53	0.46	0.38	0.28	0.16	0.08	0.03	5.19	0.00
	48	0.00	0.02	0.08	0.19	0.35	0.50	0.65	0.84	1.04	1.15	1.11	0.93	0.72	0.54	0.39	0.24	0.12	0.05	8.92	5.15
	40	0.00	0.05	0.14	0.30	0.51	0.70	0.98	1.39	1.87	2.14	1.98	1.51	1.04	0.70	0.49	0.31	0.16	0.06	14.3	12.0
	32	0.01	0.07	0.18	0.38	0.62	0.90	1.36	2.11	3.02	3.54	3.21	2.30	1.44	0.88	0.57	0.37	0.19	0.08	21.2	19.4
	24	0.01	0.08	0.22	0.44	0.70	1.07	1.74	2.90	4.39	5.28	4.74	3.25	1.89	1.06	0.64	0.41	0.22	0.09	29.1	27.6
		0.02	0.09	0.24	0.47	0.75	1.18	1.99	3.48	5.50	6.79	6.14	4.10	2.29	1.22	0.70	0.44	0.24	0.10	35.7	34.3
		0.02	0.10	0.25	0.48	0.77	1.24	2.13	3.79	6.09	7.57	6.82	4.49	2.45	1.28	0.72	0.45	0.25	0.10	39.0	37.6
		0.02	0.10	0.25	0.49	0.77	1.24	2.13	3.75	5.96	7.24	6.37	4.15	2.26	1.19	0.69	0.43	0.23	0.09	37.4	35.9
		0.02	0.09	0.22	0.45	0.70	1.09	1.80	3.09	4.76	5.76	5.11	3.42	1.95	1.08	0.65	0.41	0.22	0.09	30.9	29.4
	-24	0.01	0.07	0.18	0.38	0.61	0.89	1.37	2.19	3.24	3.89	3.55	2.51	1.53	0.91	0.59	0.38	0.20	0.08	22.6	20.8
-32	0.00	0.04	0.13	0.30	0.50	0.70	1.00	1.47	2.06	2.40	2.24	1.68	1.12	0.73	0.51	0.33	0.17	0.07	15.5	13.2	
-40	0.00	0.02	0.09	0.21	0.37	0.53	0.69	0.91	1.16	1.28	1.22	1.00	0.75	0.55	0.41	0.26	0.13	0.05	9.62	6.41	
-48	0.00	0.01	0.05	0.13	0.25	0.36	0.44	0.52	0.58	0.60	0.59	0.54	0.47	0.39	0.29	0.17	0.08	0.03	5.49	0.34	
-56	0.00	0.00	0.01	0.05	0.12	0.20	0.25	0.28	0.28	0.29	0.30	0.30	0.28	0.25	0.17	0.09	0.04	0.01	2.94	0.00	
-64	0.00	0.00	0.00	0.01	0.04	0.09	0.12	0.14	0.13	0.13	0.15	0.17	0.16	0.13	0.08	0.04	0.01	0.00	1.40	0.00	
-72	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.04	0.02	0.02	0.04	0.06	0.06	0.04	0.02	0.01	0.00	0.00	0.37	0.00	
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72
Φ t	0.11	0.74	2.10	4.41	7.39	11.3	17.4	27.7	41.0	49.0	44.5	31.4	19.3	11.7	7.42	4.64	2.41	0.93	283	---	
Φ a	0.00	0.00	0.00	0.26	4.09	8.48	15.0	25.5	39.0	47.1	42.5	29.2	17.1	8.97	4.33	0.46	0.00	0.00	---	242	


one-half-peak spread: U:20.8,D:27.2 , L:17.7,R:17.6 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.4V I:0.0607A P:7.602W PF:0.5192 Lamp Flux:283.901x1 lm		
NAME: 8.02.003.0402 20X40°LLS-COVE2-W40-L3-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500085
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

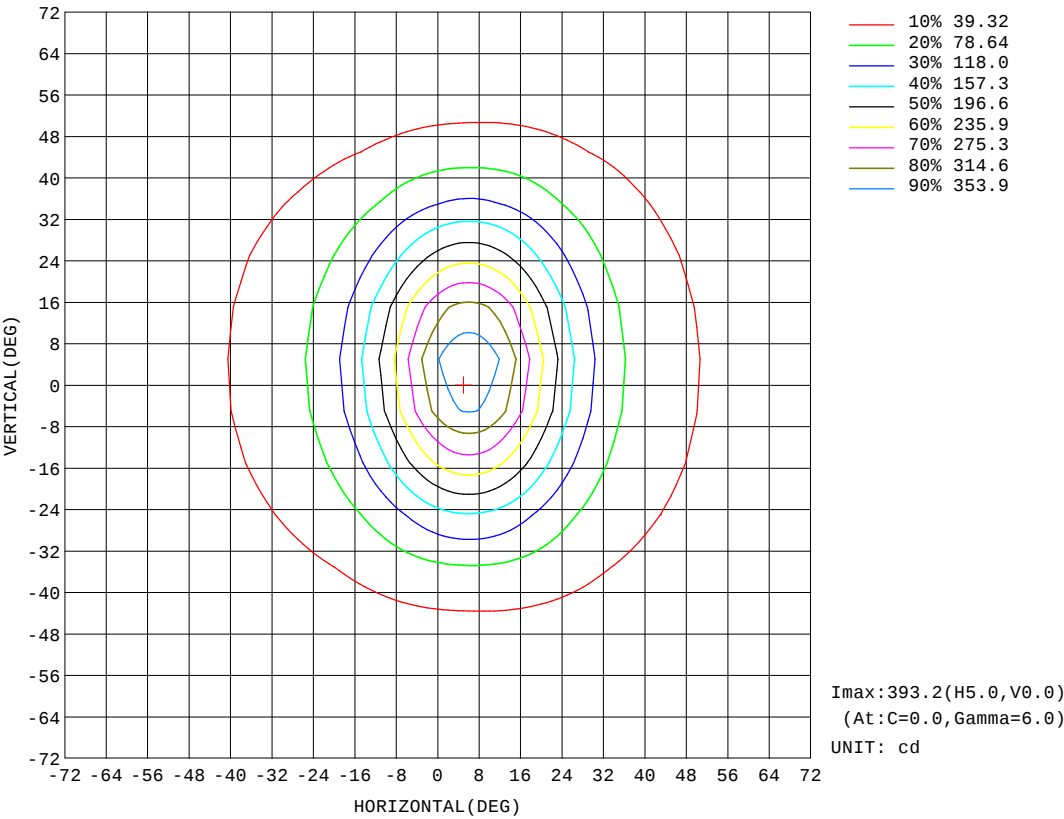


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:241.4V I:0.0607A P:7.602W PF:0.5192 Lamp Flux:283.90lx 1m		
NAME: 8.02.003.0402 20X40°LLS-COVE2-W40-L3-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500085
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

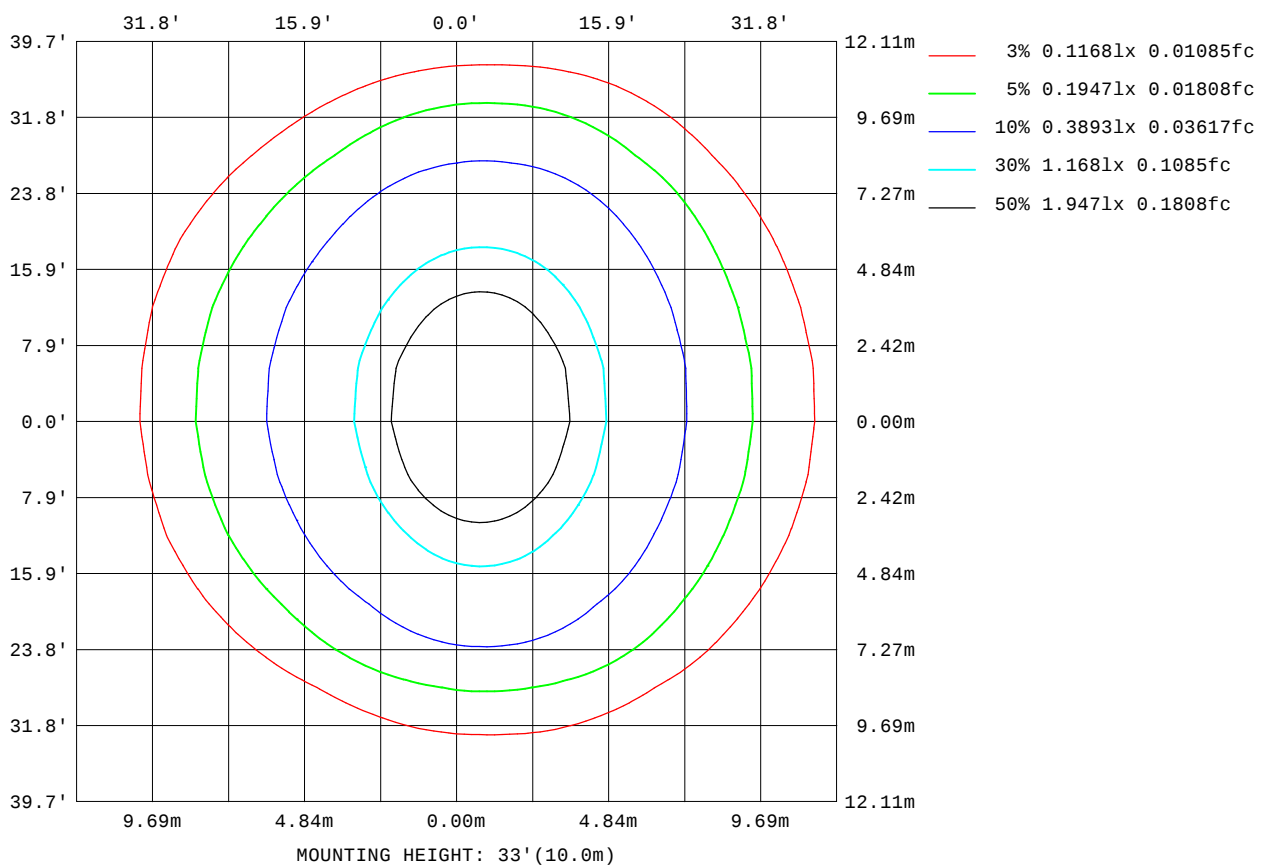


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:241.4V I:0.0607A P:7.602W PF:0.5192 Lamp Flux:283.90lx1 lm		
NAME: 8.02.003.0402 20X40°LLS-COVE2-W40-L3-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500085
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

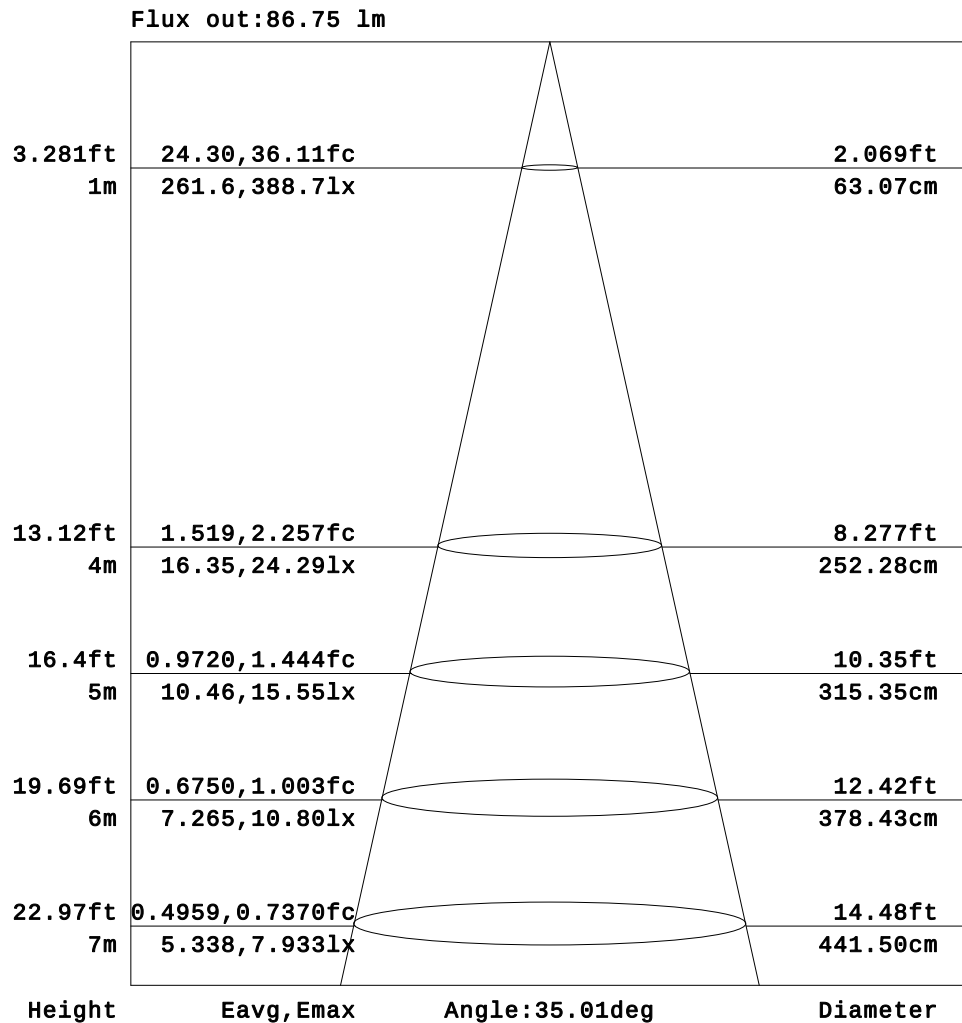


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

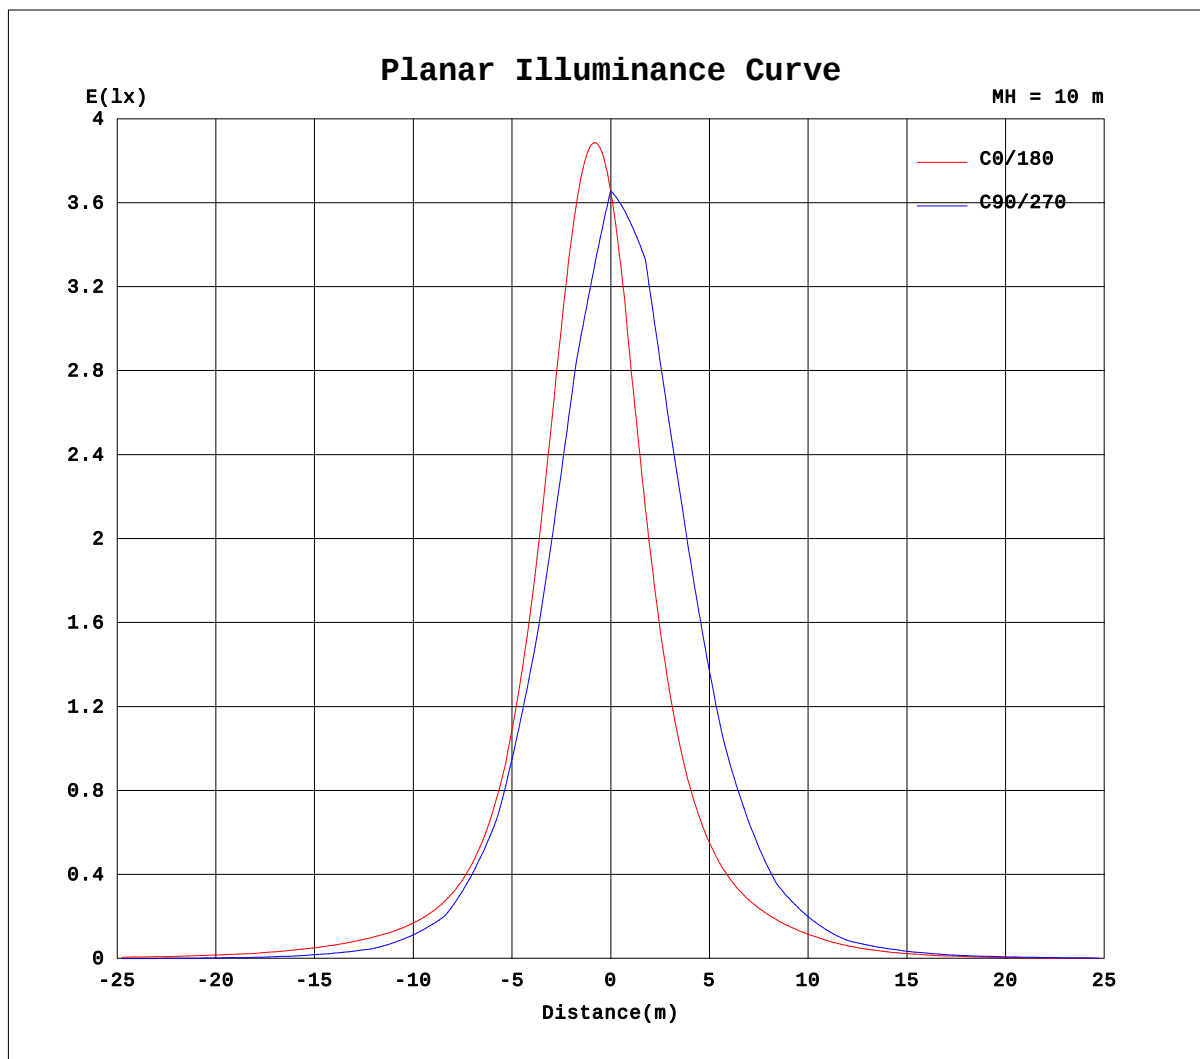

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.4V I:0.0607A P:7.602W PF:0.5192 Lamp Flux:283.901x1 lm		
NAME: 8.02.003.0402 20X40°LLS-COVE2-W40-L3-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500085
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	0.69	0.58	0.37	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.19	1.31	1.12	0.51	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	1.46	2.27	3.58	4.09	4.26	4.01	3.47	3.30	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	1.51	3.27	4.89	6.43	6.88	7.42	7.21	6.88	6.58	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.97	2.09	3.81	6.14	8.69	10.5	11.5	12.2	12.6	12.8	12.8	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	2.36	4.60	7.02	10.1	13.3	15.1	16.4	17.3	18.0	18.7	19.0	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.81	4.22	7.11	10.6	14.8	18.5	20.8	23.0	25.3	27.7	30.2	32.1	
-40	0.00	0.00	0.00	0.00	0.00	0.00	1.40	3.99	7.10	10.9	15.9	21.0	24.8	27.5	30.6	34.2	38.5	42.7	45.8	
-35	0.00	0.00	0.00	0.00	0.00	0.29	2.24	5.32	9.11	13.8	19.7	25.3	29.8	34.1	39.5	46.6	55.5	65.3	73.2	
-30	0.00	0.00	0.00	0.00	0.00	1.14	4.15	8.07	12.8	18.8	26.0	31.5	36.5	42.6	51.0	62.4	76.5	91.5	103	
-25	0.00	0.00	0.00	0.00	0.00	1.52	4.91	9.19	14.5	21.3	28.7	34.9	41.1	49.4	61.2	77.8	99.6	124	145	
-20	0.00	0.00	0.00	0.00	0.09	3.13	7.25	12.2	18.6	26.8	33.9	40.6	48.6	60.2	77.2	101	132	166	193	
-15	0.00	0.00	0.00	0.00	0.09	3.01	7.27	12.5	19.1	27.4	35.1	42.5	51.6	65.0	85.0	114	154	200	241	
-10	0.00	0.00	0.00	0.00	0.71	4.41	9.28	15.1	22.5	31.5	39.2	47.6	59.2	76.6	103	141	194	252	300	
-5	0.00	0.00	0.00	0.00	0.35	3.97	8.80	14.6	21.9	31.0	39.1	47.8	59.6	77.3	104	144	200	266	326	
0	0.00	0.00	0.00	0.00	1.24	5.24	10.5	16.8	24.6	33.9	42.3	52.0	65.9	87.1	119	167	231	308	370	
5	0.00	0.00	0.00	0.00	0.46	4.25	9.25	15.2	22.7	31.9	40.2	49.5	62.1	81.2	110	154	214	286	352	
10	0.00	0.00	0.00	0.00	1.09	5.01	10.2	16.4	24.0	33.3	41.7	51.3	64.8	85.2	116	163	224	295	353	
15	0.00	0.00	0.00	0.00	0.28	3.82	8.54	14.2	21.3	30.2	38.4	47.0	58.3	75.0	100	137	187	246	299	
20	0.00	0.00	0.00	0.00	0.67	4.28	8.98	14.5	21.6	30.6	38.5	46.7	57.4	73.4	96.8	130	174	222	261	
25	0.00	0.00	0.00	0.00	0.08	2.79	6.76	11.7	17.9	25.7	33.9	41.3	49.6	61.5	78.9	103	136	173	205	
30	0.00	0.00	0.00	0.00	0.00	2.74	6.42	11.1	16.9	24.4	32.3	38.9	45.9	55.7	69.5	88.4	112	138	158	
35	0.00	0.00	0.00	0.00	0.00	1.26	4.36	8.29	13.0	19.0	26.5	32.9	38.6	45.5	54.9	67.7	84.1	102	117	
40	0.00	0.00	0.00	0.00	0.00	0.95	3.75	7.21	11.2	16.5	23.5	29.3	33.8	38.6	44.9	53.1	62.9	73.0	80.5	
45	0.00	0.00	0.00	0.00	0.00	0.22	1.79	4.47	7.64	11.6	16.6	22.1	26.5	30.1	34.1	39.1	45.0	51.3	56.2	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.85	2.95	5.54	8.39	12.1	17.0	20.7	23.1	25.2	27.3	29.7	31.9	33.5	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.23	1.25	2.87	5.04	7.81	11.2	14.6	17.0	18.5	20.1	21.4	22.7	23.6	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	2.69	4.74	6.94	9.69	11.6	12.5	13.3	13.6	13.9	14.0	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	1.15	2.17	3.55	5.67	7.48	8.40	8.91	9.09	8.75	8.45	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	2.58	3.88	4.55	4.67	4.45	3.44	2.88	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	1.12	1.84	2.25	2.30	2.31	1.82	1.46	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.4V I:0.0607A P:7.602W PF:0.5192 Lamp Flux:283.901x1 lm		
NAME: 8.02.003.0402 20X40°LLS-COVE2-W40-L3-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500085
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.68	0.88	1.07	1.07	0.70	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.22	1.42	1.87	2.19	2.04	1.15	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	3.33	3.78	4.89	5.45	5.61	5.60	4.93	3.62	2.67	1.99	1.30	0.64	0.04	0.00	0.00	0.00	0.00	0.00
-60	6.82	7.74	8.57	9.18	9.07	9.04	8.14	6.49	5.04	3.70	2.33	1.03	0.00	0.00	0.00	0.00	0.00	0.00
-55	12.9	13.7	14.3	14.6	14.5	14.1	13.4	11.9	9.68	7.35	5.32	3.47	1.74	0.64	0.00	0.00	0.00	0.00
-50	19.2	19.9	20.2	20.1	19.7	18.9	18.2	16.5	13.3	10.2	7.56	5.18	2.94	0.90	0.00	0.00	0.00	0.00
-45	33.0	33.4	32.7	31.0	28.9	26.5	24.5	22.5	19.5	15.6	11.6	8.32	5.38	2.66	0.61	0.00	0.00	0.00
-40	47.0	46.9	44.7	41.1	37.1	33.3	30.0	27.6	24.2	19.3	14.3	10.2	6.66	3.44	0.74	0.00	0.00	0.00
-35	77.0	76.1	70.4	61.6	52.4	44.2	37.8	33.2	29.4	24.6	19.0	13.7	9.34	5.41	2.06	0.03	0.00	0.00
-30	107	104	92.8	78.3	64.1	52.3	43.4	37.3	32.9	27.8	21.4	15.4	10.4	5.95	2.22	0.00	0.00	0.00
-25	155	151	134	110	86.3	67.1	52.9	43.3	37.1	31.8	25.5	18.6	12.8	7.82	3.51	0.26	0.00	0.00
-20	203	193	166	131	100.0	75.4	57.9	46.4	39.2	33.4	26.8	19.3	13.2	7.80	3.30	0.06	0.00	0.00
-15	260	252	217	171	128	93.1	68.9	53.1	43.3	36.6	30.0	22.3	15.5	9.68	4.64	0.74	0.00	0.00
-10	319	300	251	192	140	99.6	72.4	55.0	44.4	37.3	30.4	22.3	15.3	9.35	4.23	0.32	0.00	0.00
-5	355	343	293	225	163	114	81.4	60.4	47.6	39.5	32.5	24.6	17.2	10.8	5.33	1.10	0.00	0.00
0	393	371	308	232	165	114	80.4	59.6	47.0	38.9	31.7	23.6	16.2	9.96	4.51	0.45	0.00	0.00
5	383	370	316	242	174	121	85.4	62.7	48.8	40.3	33.1	25.2	17.6	11.2	5.54	1.23	0.00	0.00
10	375	354	294	223	159	112	79.5	59.1	46.7	38.7	31.6	23.5	16.2	9.94	4.61	0.53	0.00	0.00
15	324	314	270	210	153	110	78.8	58.8	46.6	38.7	31.8	24.0	16.7	10.6	5.23	1.10	0.00	0.00
20	276	261	222	172	128	92.8	68.5	52.6	42.8	36.0	29.2	21.3	14.7	8.92	4.00	0.29	0.00	0.00
25	220	214	187	150	115	85.7	64.6	50.4	41.5	35.1	28.7	21.2	14.7	9.24	4.44	0.71	0.00	0.00
30	166	159	139	113	89.0	68.9	54.0	43.9	37.4	31.7	25.2	18.2	12.5	7.46	3.21	0.08	0.00	0.00
35	124	122	110	92.5	75.1	60.1	48.5	40.4	34.8	29.6	23.5	17.0	11.8	7.22	3.28	0.25	0.00	0.00
40	83.2	81.0	74.0	64.4	54.6	46.1	39.2	34.4	30.2	25.2	19.0	13.6	9.25	5.27	1.98	0.00	0.00	0.00
45	58.6	58.3	55.1	49.8	43.9	38.3	33.7	30.2	26.4	21.8	16.7	12.1	8.25	4.79	1.86	0.01	0.00	0.00
50	34.2	34.8	34.2	32.9	30.8	28.6	26.6	24.6	21.0	16.4	12.3	8.90	5.82	3.04	0.71	0.00	0.00	0.00
55	24.1	24.8	25.1	24.7	23.7	22.4	21.2	19.3	16.2	12.9	9.76	7.01	4.55	2.31	0.58	0.00	0.00	0.00
60	14.2	15.1	15.8	16.1	16.1	15.8	15.1	12.9	10.2	8.01	6.05	4.15	2.34	0.77	0.00	0.00	0.00	0.00
65	8.59	9.62	10.6	11.2	11.4	11.3	10.6	9.06	7.17	5.48	3.99	2.56	1.35	0.53	0.00	0.00	0.00	0.00
70	3.27	4.54	5.85	6.30	6.71	6.63	5.47	4.46	3.42	2.33	1.34	0.44	0.00	0.00	0.00	0.00	0.00	0.00
75	1.54	2.14	2.80	3.14	3.50	3.49	2.86	2.33	1.81	1.26	0.77	0.31	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.05	0.39	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: