

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2167.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	68.3V x 69.0H
	At 50% of Imax	31.8V x 31.9H
	At 90% of Imax	8.3V x 11.6H
Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	784.5 lumens per klm.
	To 50% of Imax	353.1 lumens per klm.
	To 90% of Imax	37.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.6V I:0.0591A P:7.369W PF:0.5165 Lamp Flux:700.358x1 lm		
NAME: 8.02.003.0408 25°LLS-COVE2-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

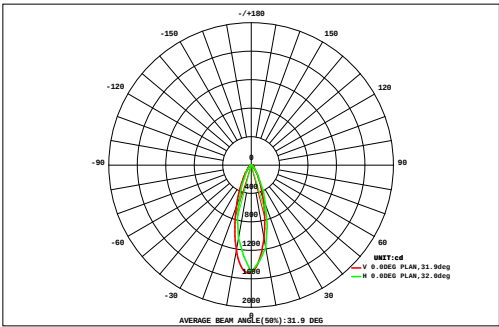

DATA OF LAMP		Eff:95.04lm/W	
MODEL LLS-COVE2-W40-L3-S		Imax(cd)	1518
NOMINAL POWER(W)	7	AVAILABILITY(%)	79.0
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	553.1
NOMINAL FLUX(lm)	700.358	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	700.4
TEST VOLTAGE(V)	241.6	θ @50%(H,V)	32,32DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
		0.18	0.23	0.29	0.35	0.42	0.49	0.55	0.60	0.63	0.63	0.61	0.56	0.50	0.43	0.36	0.31	0.25	0.20	7.56	0.00	
VERTICAL (DEG)	40	0.22	0.29	0.36	0.45	0.54	0.64	0.73	0.80	0.83	0.82	0.78	0.70	0.61	0.51	0.42	0.34	0.27	0.21	9.52	0.00	
	35	0.25	0.34	0.45	0.60	0.79	1.00	1.22	1.40	1.49	1.50	1.41	1.24	1.02	0.81	0.63	0.48	0.36	0.26	15.2	8.21	
	30	0.31	0.43	0.59	0.81	1.08	1.38	1.68	1.91	2.02	2.00	1.83	1.56	1.25	0.96	0.72	0.53	0.38	0.27	19.7	14.3	
	25	0.33	0.48	0.70	1.03	1.49	2.10	2.77	3.37	3.72	3.71	3.36	2.77	2.11	1.52	1.06	0.73	0.49	0.34	32.1	28.2	
	20	0.41	0.62	0.94	1.42	2.09	2.98	3.92	4.71	5.08	4.92	4.30	3.41	2.49	1.73	1.16	0.77	0.51	0.34	41.8	38.4	
	15	0.40	0.61	0.97	1.54	2.41	3.67	5.23	6.75	7.72	7.71	6.74	5.24	3.72	2.48	1.60	1.01	0.64	0.41	58.8	55.9	
	10	0.49	0.78	1.28	2.09	3.33	5.09	7.20	9.11	10.1	9.67	8.06	5.97	4.05	2.60	1.61	1.00	0.62	0.39	73.4	70.9	
	5	0.43	0.68	1.11	1.83	2.98	4.69	6.87	9.15	10.7	10.7	9.13	6.89	4.73	3.05	1.90	1.17	0.72	0.44	77.1	74.6	
	0	0.51	0.83	1.38	2.32	3.79	5.90	8.47	10.9	12.1	11.5	9.23	6.63	4.38	2.75	1.69	1.03	0.62	0.39	84.4	82.0	
	-5	0.41	0.63	1.01	1.62	2.56	3.93	5.66	7.43	8.65	8.72	7.60	5.84	4.09	2.70	1.72	1.08	0.68	0.42	64.7	62.0	
	-10	0.45	0.70	1.12	1.75	2.67	3.92	5.33	6.52	7.04	6.66	5.59	4.24	2.97	1.99	1.29	0.84	0.54	0.35	54.0	51.0	
	-15	0.34	0.51	0.76	1.14	1.67	2.38	3.24	4.05	4.58	4.63	4.18	3.39	2.52	1.78	1.21	0.81	0.54	0.36	38.1	34.5	
	-20	0.35	0.51	0.73	1.03	1.40	1.83	2.22	2.45	2.50	2.38	2.14	1.80	1.41	1.07	0.79	0.56	0.39	0.28	23.8	19.1	
	-25	0.27	0.37	0.51	0.69	0.93	1.21	1.51	1.77	1.93	1.94	1.81	1.57	1.27	0.98	0.73	0.54	0.39	0.27	18.7	13.0	
	-30	0.25	0.33	0.43	0.55	0.67	0.77	0.84	0.87	0.87	0.85	0.80	0.74	0.65	0.55	0.45	0.36	0.28	0.21	10.5	1.10	
	-35	0.19	0.25	0.32	0.40	0.50	0.59	0.68	0.75	0.79	0.79	0.76	0.69	0.60	0.51	0.42	0.34	0.26	0.20	9.04	0.00	
-40	0.17	0.21	0.26	0.30	0.34	0.36	0.38	0.39	0.39	0.38	0.37	0.35	0.32	0.29	0.26	0.23	0.19	0.15	5.33	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45		
Φ t	5.96	8.78	13.2	19.9	29.7	42.9	58.5	72.9	81.1	79.5	68.7	53.6	38.7	26.7	18.0	12.1	8.12	5.47	644	---		
Φ a	0.00	0.36	6.06	14.7	25.3	39.0	55.1	69.8	77.9	76.2	65.6	50.3	34.9	21.6	12.6	4.01	0.00	0.00	---	553		


one-half-peak spread: U:15.1,D:17.0 , L:16.5,R:15.7 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.6V I:0.0591A P:7.369W PF:0.5165 Lamp Flux:700.358x1 lm		
NAME: 8.02.003.0408 25°LLS-COVE2-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

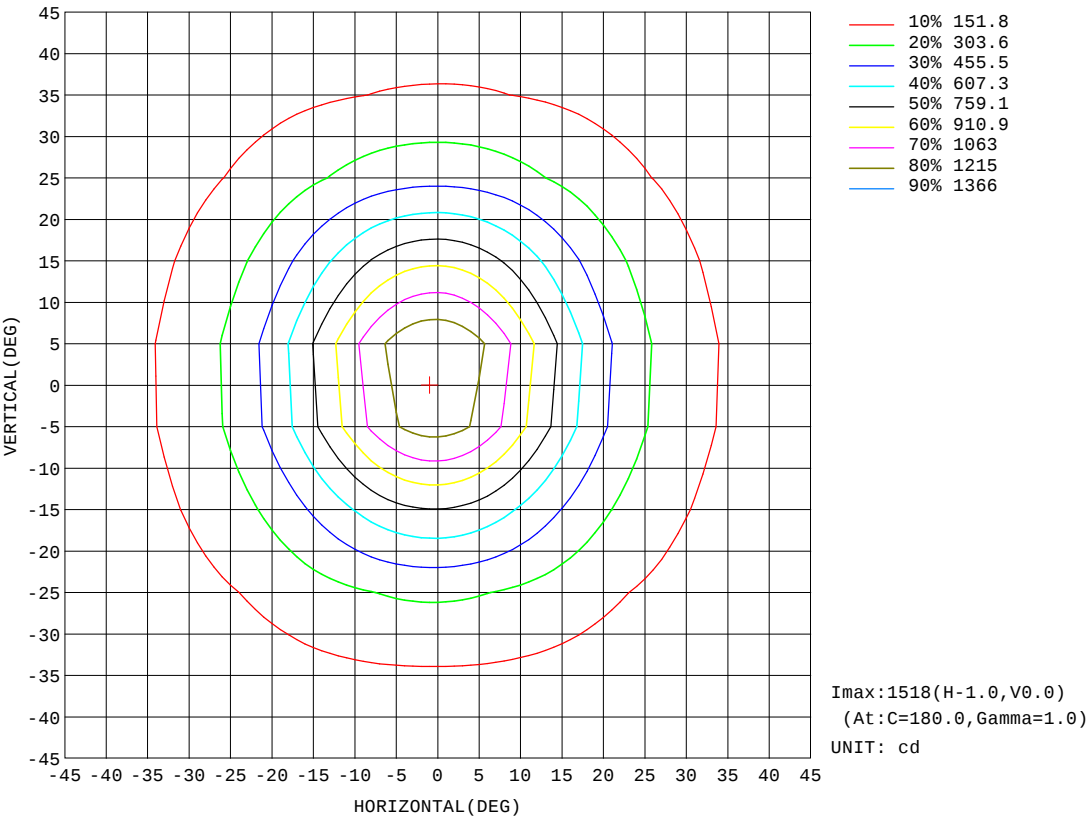


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:241.6V I:0.0591A P:7.369W PF:0.5165 Lamp Flux:700.358x1 lm		
NAME: 8.02.003.0408 25°LLS-COVE2-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

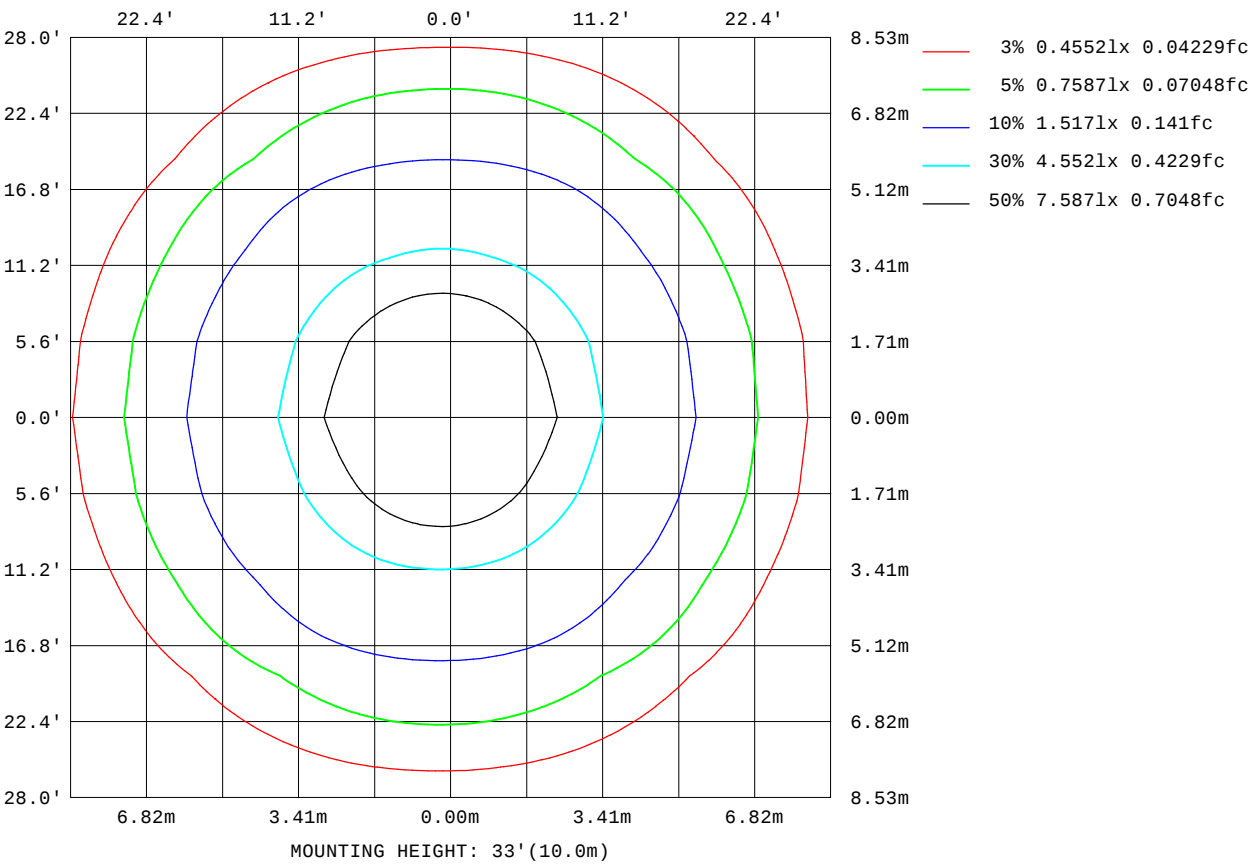


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:241.6V I:0.0591A P:7.369W PF:0.5165 Lamp Flux:700.358x1 lm		
NAME: 8.02.003.0408 25°LLS-COVE2-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

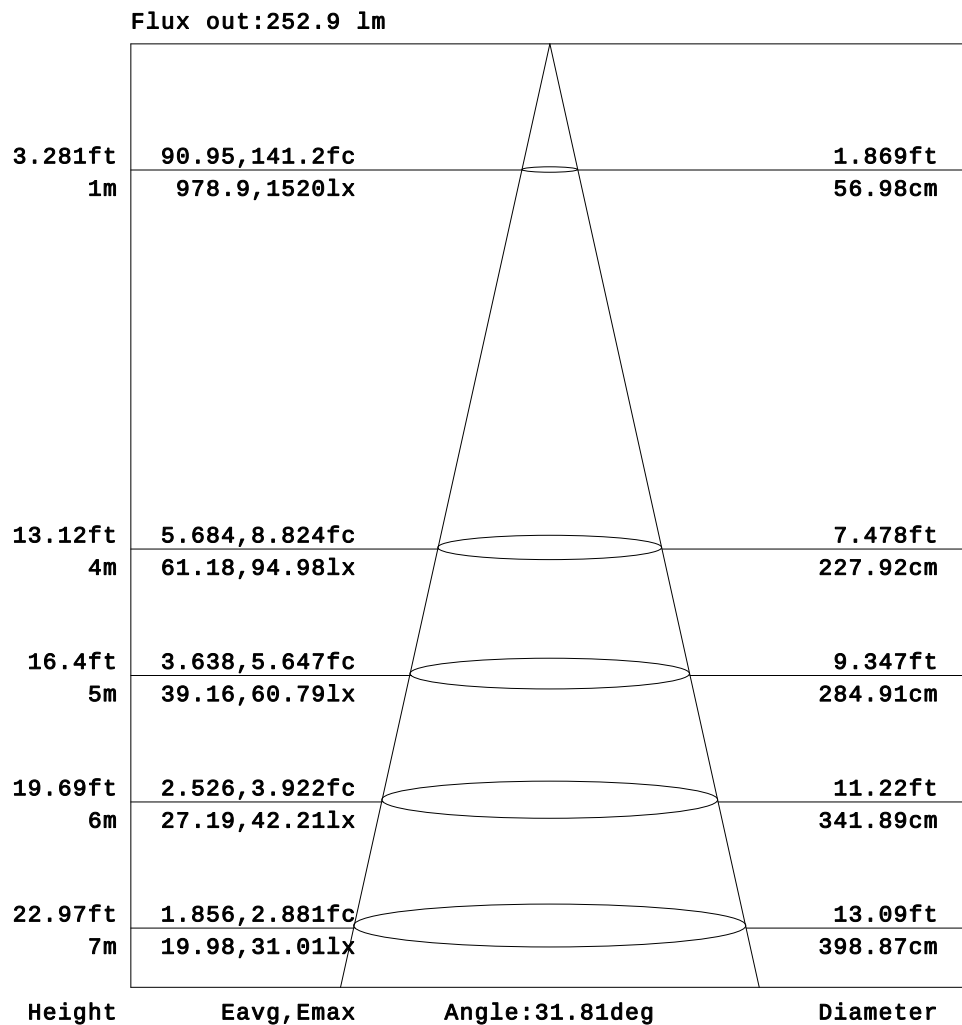


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

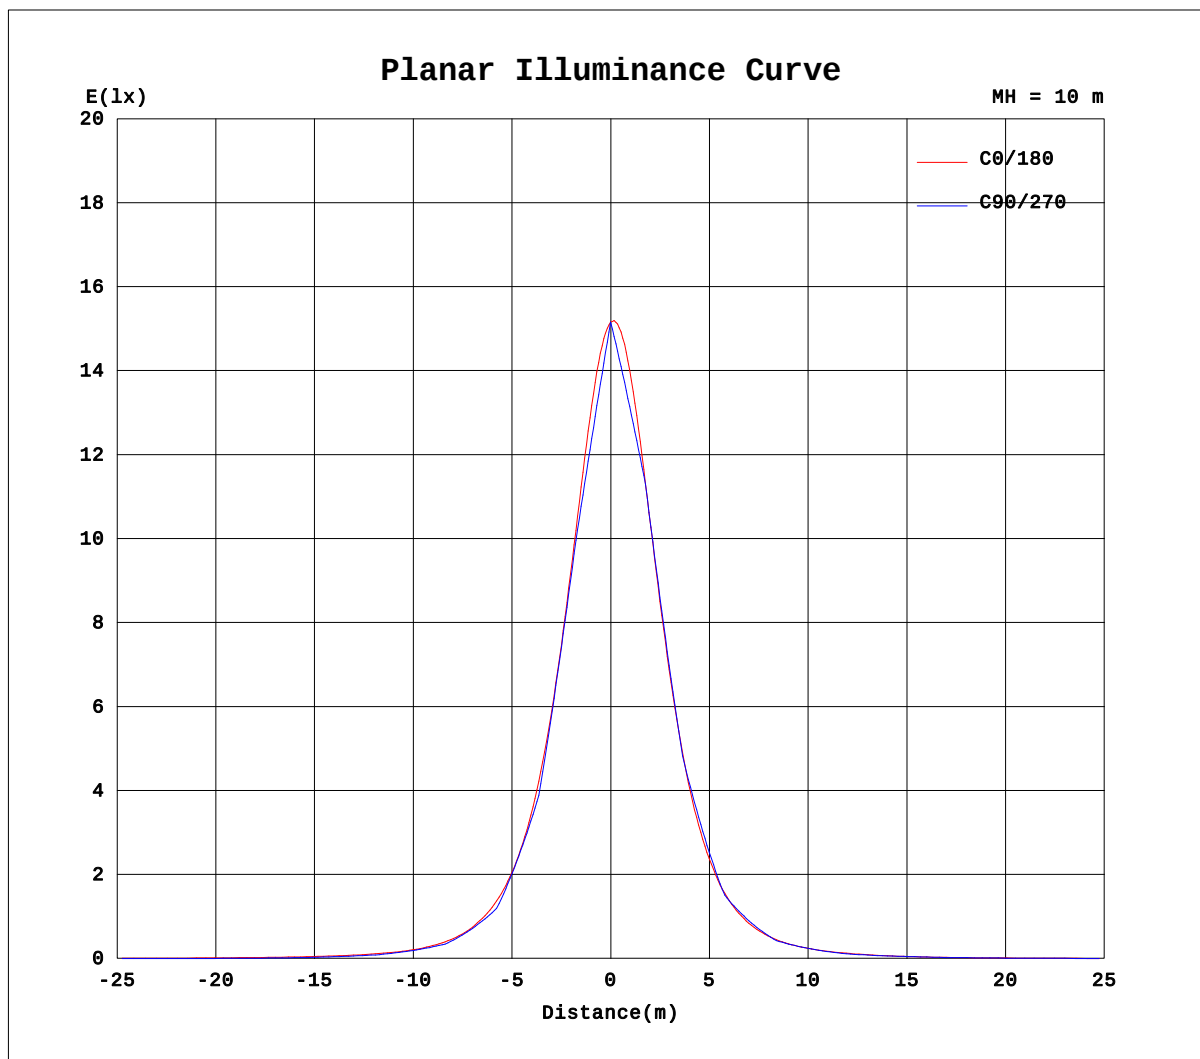

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-05-20

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.6V I:0.0591A P:7.369W PF:0.5165 Lamp Flux:700.358x1 lm		
NAME: 8.02.003.0408 25°LLS-COVE2-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.28	0.66	1.28	1.56	1.54	1.25	1.48	1.57	1.96	1.46	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.92	1.68	2.71	3.15	3.00	2.50	3.04	3.21	3.95	2.41	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	1.23	2.19	3.22	4.45	4.90	5.57	6.18	7.61	8.78	9.64	8.65	7.08	6.64	6.37	6.19
-60	0.00	0.00	0.00	0.74	2.54	3.62	5.39	6.42	6.91	8.40	10.2	12.8	14.7	15.3	14.3	14.0	13.2	12.6	12.4
-55	0.00	0.00	0.00	1.09	3.39	4.65	6.58	7.99	9.57	12.4	15.6	18.7	21.2	22.9	23.1	23.6	23.6	23.5	23.2
-50	0.00	0.00	0.00	2.92	4.88	5.72	8.27	10.1	13.2	17.8	22.2	25.8	28.6	30.6	32.2	33.3	34.0	34.1	34.0
-45	0.00	0.00	0.00	2.97	5.25	6.97	9.55	12.3	16.8	22.6	28.2	33.1	38.1	43.0	47.2	51.0	54.0	55.6	55.7
-40	0.00	0.00	0.85	4.41	5.91	8.78	11.7	16.0	22.6	29.9	36.4	42.6	49.6	57.2	63.9	70.1	74.9	77.2	77.4
-35	0.00	0.00	0.78	4.28	6.73	9.54	12.8	17.9	25.6	34.2	42.8	52.5	64.7	78.9	93.8	109	121	129	131
-30	0.00	0.00	1.81	5.31	7.43	11.2	15.4	22.5	32.0	42.1	52.9	66.9	85.1	107	130	153	172	183	185
-25	0.00	0.00	1.53	4.75	8.41	11.7	16.2	23.8	34.3	46.3	60.5	80.0	107	143	187	238	285	318	327
-20	0.00	0.00	2.93	5.91	10.0	13.6	19.4	28.9	41.3	55.6	74.9	103	143	196	264	343	415	460	468
-15	0.00	0.00	1.42	6.00	9.93	13.5	19.2	28.8	41.7	57.3	79.1	112	164	239	343	475	613	721	757
-10	0.00	0.00	2.16	7.97	10.8	15.2	22.3	33.3	47.6	66.2	94.3	140	212	319	470	663	862	1009	1039
-5	0.00	0.00	2.55	7.56	10.6	14.8	21.3	31.7	46.0	64.4	92.2	138	213	330	502	731	989	1204	1281
0	0.00	0.00	4.67	8.40	11.4	16.4	23.8	35.6	50.8	71.7	105	161	252	399	617	901	1214	1458	1509
5	0.00	0.19	3.69	7.88	10.9	15.3	21.7	32.1	46.4	64.9	93.2	140	217	339	520	763	1038	1267	1351
10	0.00	0.83	4.55	8.60	11.4	16.2	23.1	34.2	48.5	67.5	96.6	145	223	341	512	733	967	1139	1179
15	0.00	0.38	3.53	7.95	10.9	14.9	20.6	30.0	42.8	58.7	81.8	117	174	259	380	536	704	836	883
20	0.00	0.72	4.40	8.70	11.2	15.5	21.3	30.7	42.8	57.6	78.5	109	155	220	307	407	503	567	581
25	0.00	0.30	3.07	7.57	10.6	13.7	18.4	26.1	36.5	48.4	63.9	85.6	117	160	215	281	345	392	408
30	0.00	0.63	3.63	8.06	10.9	13.7	18.1	25.5	34.5	44.5	56.7	72.7	93.6	120	150	182	210	228	233
35	0.00	0.18	2.36	6.66	10.1	12.1	15.9	21.3	29.0	37.3	46.3	57.4	71.2	88.3	108	128	147	160	164
40	0.00	0.41	2.81	6.98	10.2	11.8	15.4	20.1	26.6	33.5	39.9	47.1	55.1	64.1	73.4	82.5	90.1	94.6	95.8
45	0.00	0.06	1.57	5.24	8.78	10.8	13.2	16.8	21.6	27.4	32.9	38.3	43.6	49.0	54.9	60.5	65.4	68.7	69.7
50	0.00	0.00	1.67	5.01	8.61	10.7	12.4	15.2	18.8	23.6	28.0	31.5	34.2	36.1	38.7	40.7	42.5	43.5	43.6
55	0.00	0.00	0.89	3.41	6.46	9.23	10.8	12.7	15.4	18.7	22.4	25.8	28.4	29.4	30.6	32.0	32.4	32.9	32.9
60	0.00	0.00	0.78	2.98	5.64	8.56	10.2	11.2	13.2	15.3	18.3	21.3	23.3	22.8	23.4	23.3	22.6	22.4	22.2
65	0.00	0.00	0.32	1.63	3.64	5.93	7.89	9.15	10.5	11.7	13.8	15.7	17.8	17.9	17.2	17.6	16.2	15.2	14.6
70	0.00	0.00	0.00	0.96	2.50	4.14	6.17	7.87	8.13	9.07	9.93	11.0	12.7	12.7	10.9	12.2	9.14	7.64	7.19
75	0.00	0.00	0.00	0.40	1.10	2.14	3.54	4.84	5.40	6.12	7.01	7.00	8.05	7.82	6.70	5.78	4.94	3.94	3.56
80	0.00	0.00	0.00	0.00	0.00	0.56	1.49	2.14	2.85	3.80	4.18	3.17	3.71	2.65	1.52	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.6V I:0.0591A P:7.369W PF:0.5165 Lamp Flux:700.358x1 lm																	
NAME: 8.02.003.0408 25°LLS-COVE2-W40-L3-S									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:20240500080		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--2																	
UNIT: cd																	
H(°)\V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.08	1.76	3.02	2.49	2.11	1.96	1.83	1.54	1.32	1.11	0.73	0.03	0.00	0.00	0.00
-70	0.00	0.00	0.67	4.36	5.91	4.78	4.09	3.87	3.53	2.97	2.62	2.16	1.17	0.00	0.00	0.00	0.00
-65	6.31	6.60	7.33	9.17	11.1	10.6	9.41	8.18	7.22	6.42	5.68	4.61	3.43	1.91	0.67	0.00	0.00
-60	12.7	13.4	14.6	14.9	16.5	16.0	14.1	12.0	10.5	9.63	8.48	6.61	5.07	3.49	0.53	0.00	0.00
-55	23.2	23.2	23.4	23.1	23.2	22.7	20.4	17.6	15.1	13.0	11.2	9.66	7.67	5.37	2.84	0.17	0.00
-50	33.7	33.1	32.3	31.1	30.0	28.7	25.5	22.3	18.8	15.5	13.4	12.0	9.31	6.41	3.76	0.00	0.00
-45	54.9	52.7	49.5	45.8	41.8	38.3	33.5	28.5	23.9	19.7	16.3	14.0	11.8	8.54	5.32	1.36	0.00
-40	75.4	71.3	65.4	58.8	52.3	46.2	39.4	32.9	27.2	22.3	18.2	15.3	13.1	9.31	5.57	1.39	0.00
-35	128	118	105	90.1	75.8	63.3	51.8	41.7	33.5	26.9	21.6	17.7	14.9	11.7	7.35	3.28	0.00
-30	177	161	139	116	94.2	75.6	59.8	47.0	36.9	29.0	23.2	18.9	15.7	12.4	7.43	2.96	0.00
-25	312	276	227	179	137	103	77.7	58.1	44.0	33.9	26.4	21.3	17.1	14.1	9.15	4.67	0.00
-20	435	373	296	223	165	119	86.6	62.8	46.4	35.2	27.2	21.9	17.4	14.2	8.77	4.03	0.00
-15	705	590	452	326	228	157	109	76.0	54.0	40.0	30.2	24.0	19.0	15.6	10.6	5.49	0.07
-10	937	753	554	384	257	173	117	78.8	55.1	40.2	30.4	24.2	19.0	15.4	9.99	4.80	0.00
-5	1176	946	692	474	313	205	135	89.2	60.9	43.9	32.7	25.7	20.3	16.6	11.5	5.93	0.15
0	1336	1037	734	489	316	203	131	85.9	58.4	42.0	31.7	25.3	19.7	16.0	10.4	5.01	0.00
5	1242	1000	729	497	327	212	138	91.0	62.0	44.6	33.4	26.3	20.8	17.0	11.8	6.09	0.18
10	1066	855	623	427	282	185	123	82.1	57.0	41.6	31.8	25.4	20.0	16.3	10.5	5.13	0.00
15	826	689	524	372	256	172	117	80.7	57.1	42.1	32.2	25.8	20.5	16.9	11.4	5.94	0.16
20	540	458	359	265	190	134	94.9	68.0	49.9	37.7	29.7	24.0	19.3	15.8	9.67	4.57	0.00
25	389	341	278	214	160	117	86.4	64.0	48.1	37.1	29.5	24.1	19.5	16.1	10.4	5.46	0.07
30	223	201	171	139	110	86.6	67.6	52.8	41.2	33.1	27.1	22.1	18.4	14.7	8.59	3.89	0.00
35	160	148	129	109	89.6	73.0	59.4	48.0	38.6	31.7	26.1	21.7	18.3	14.6	8.81	4.49	0.00
40	93.9	88.2	79.9	70.8	61.6	53.8	46.2	39.1	32.8	27.9	23.2	19.8	16.9	12.2	7.22	2.61	0.00
45	69.1	66.1	61.4	56.3	50.5	45.9	41.1	35.5	30.7	26.2	22.2	19.0	16.2	11.8	7.27	3.01	0.00
50	43.3	42.4	41.0	39.5	37.3	36.3	33.7	29.9	26.6	22.7	19.7	17.2	14.1	9.09	6.11	1.30	0.00
55	33.1	32.9	33.1	32.9	31.6	31.7	29.7	26.8	23.5	20.4	18.0	15.6	12.3	8.43	5.46	1.31	0.00
60	22.7	23.4	25.5	25.5	25.9	26.6	24.7	22.2	19.2	17.1	15.4	13.0	8.97	6.57	3.28	0.05	0.00
65	15.3	16.9	20.4	20.0	20.7	22.3	20.4	18.6	16.2	14.6	12.6	10.3	7.79	5.33	2.59	0.20	0.00
70	8.15	11.7	15.2	14.5	16.3	17.8	15.4	13.8	12.6	11.3	8.95	6.64	5.78	3.12	0.51	0.00	0.00
75	3.94	5.26	7.94	8.51	9.83	10.6	9.79	8.86	7.95	7.43	6.20	4.40	3.17	1.91	0.46	0.00	0.00
80	0.00	0.00	0.00	3.56	3.64	3.45	3.73	3.52	3.26	3.23	2.72	1.48	0.29	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: