

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	521.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	105.3V x 139.0H
	At 50% of Imax	79.4V x 102.8H
	At 90% of Imax	38.4V x 47.0H

Beam Flux	Total	996.2 lumens per klm.
	To 10% of Imax	982.7 lumens per klm.
	To 50% of Imax	758.8 lumens per klm.
	To 90% of Imax	213.8 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.0956A P:11.14W PF:0.9692 Lamp Flux:34.8667x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

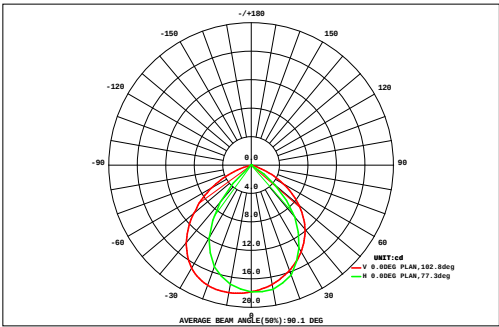

DATA OF LAMP		Eff:3.13lm/W	
MODEL: LLS-OP-D50-L12-RDM(AL)		Imax(cd)	18.19
NOMINAL POWER(W)	12	AVAILABILITY(%)	99.0
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	34.52
NOMINAL FLUX(lm)	34.8667	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	34.87
TEST VOLTAGE(V)	120.1	θ @50%(H,V)	103,79DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
50	0.00	0.00	0.00	0.03	0.07	0.09	0.08	0.06	0.05	0.05	0.05	0.04	0.04	0.03	0.01	0.00	0.00	0.00	0.62	0.56
40	0.00	0.00	0.01	0.07	0.14	0.20	0.23	0.24	0.22	0.20	0.19	0.17	0.14	0.10	0.05	0.01	0.00	0.00	1.97	1.95
30	0.00	0.00	0.03	0.10	0.19	0.28	0.34	0.37	0.36	0.34	0.31	0.27	0.22	0.15	0.08	0.02	0.00	0.00	3.08	3.06
20	0.00	0.00	0.04	0.12	0.23	0.34	0.42	0.46	0.47	0.45	0.41	0.35	0.28	0.19	0.11	0.03	0.00	0.00	3.91	3.90
10	0.00	0.00	0.05	0.14	0.26	0.38	0.47	0.52	0.53	0.51	0.47	0.40	0.32	0.22	0.12	0.04	0.00	0.00	4.43	4.42
0	0.00	0.00	0.05	0.15	0.27	0.39	0.48	0.54	0.55	0.53	0.49	0.42	0.33	0.23	0.13	0.05	0.00	0.00	4.59	4.59
-10	0.00	0.00	0.05	0.14	0.26	0.38	0.47	0.52	0.54	0.52	0.48	0.41	0.32	0.22	0.12	0.04	0.00	0.00	4.50	4.49
-20	0.00	0.00	0.04	0.13	0.24	0.36	0.44	0.49	0.50	0.48	0.44	0.38	0.30	0.21	0.11	0.04	0.00	0.00	4.17	4.17
-30	0.00	0.00	0.03	0.11	0.21	0.31	0.38	0.42	0.42	0.41	0.38	0.33	0.26	0.18	0.10	0.03	0.00	0.00	3.55	3.54
-40	0.00	0.00	0.01	0.07	0.15	0.23	0.29	0.31	0.30	0.28	0.26	0.24	0.19	0.13	0.07	0.01	0.00	0.00	2.56	2.55
-50	0.00	0.00	0.00	0.03	0.09	0.14	0.16	0.15	0.13	0.11	0.11	0.11	0.11	0.08	0.04	0.00	0.00	0.00	1.26	1.22
-60	0.00	0.00	0.00	0.00	0.03	0.04	0.03	0.01	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.18	0.07
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.00	0.01	0.32	1.10	2.15	3.13	3.82	4.09	4.08	3.90	3.58	3.14	2.53	1.78	0.95	0.28	0.01	0.00	35	---
Φ a	0.00	0.00	0.29	1.08	2.12	3.10	3.78	4.08	4.07	3.89	3.57	3.12	2.51	1.75	0.93	0.24	0.00	0.00	---	35


one-half-peak spread: U:37.3,D:42.5 , L:43.0,Beam Type: Type 7 x 6 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.0956A P:11.14W PF:0.9692 Lamp Flux:34.8667x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

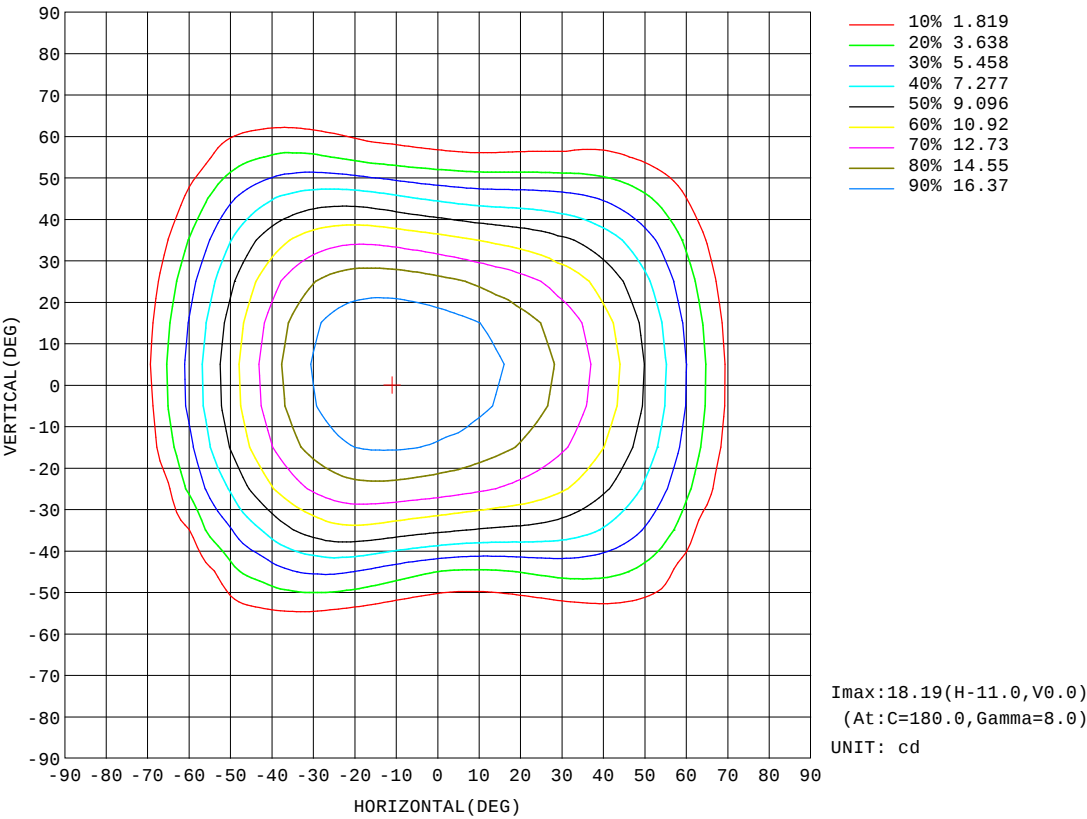


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.0956A P:11.14W PF:0.9692 Lamp Flux:34.8667x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

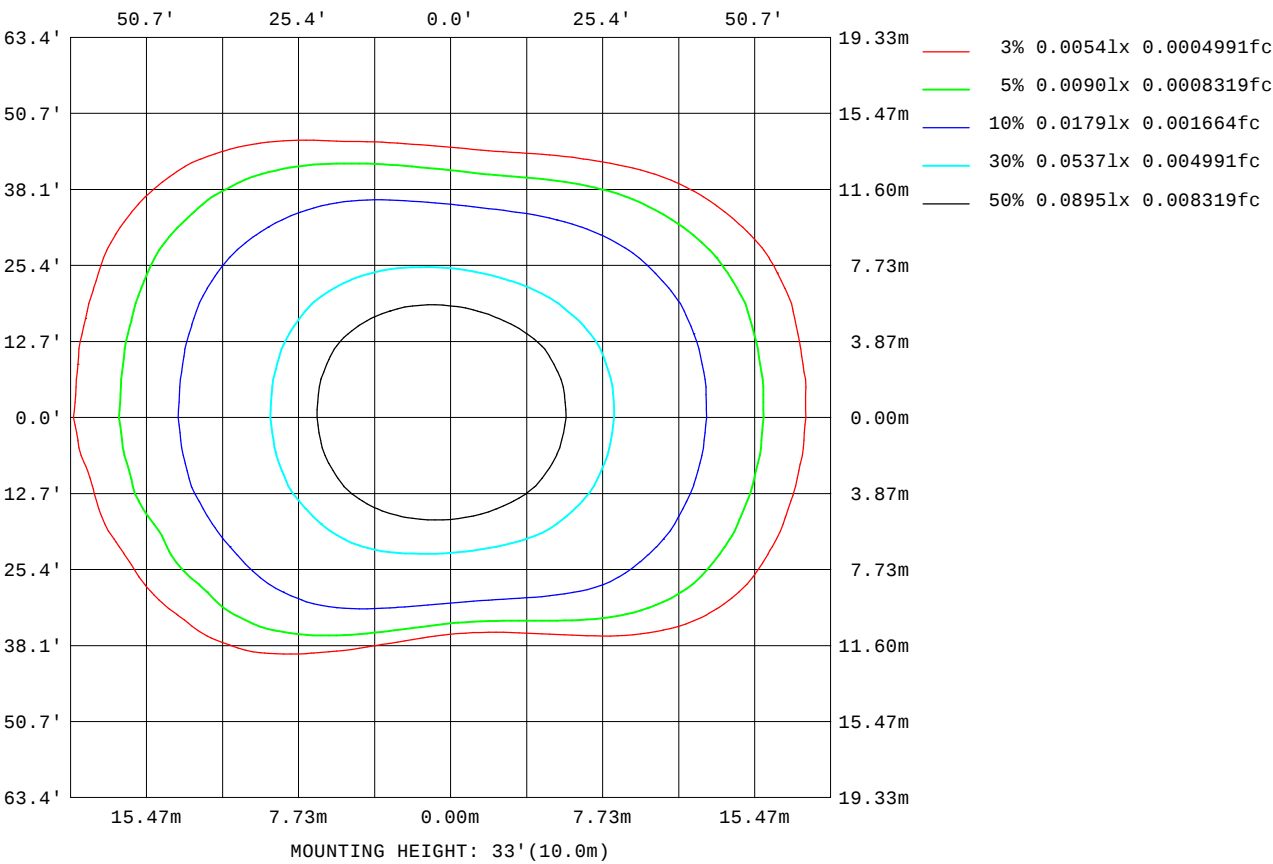


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.2V I:0.0956A P:11.14W PF:0.9692 Lamp Flux:34.8667x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

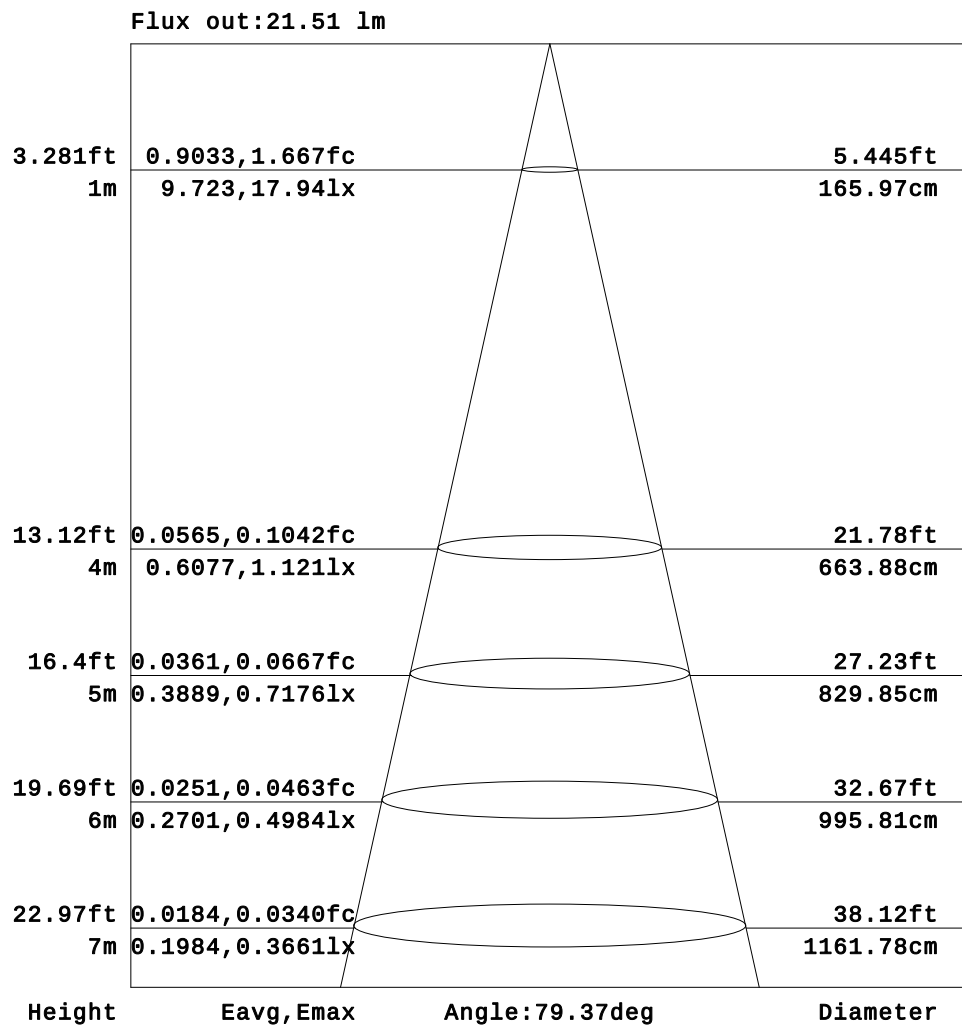


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

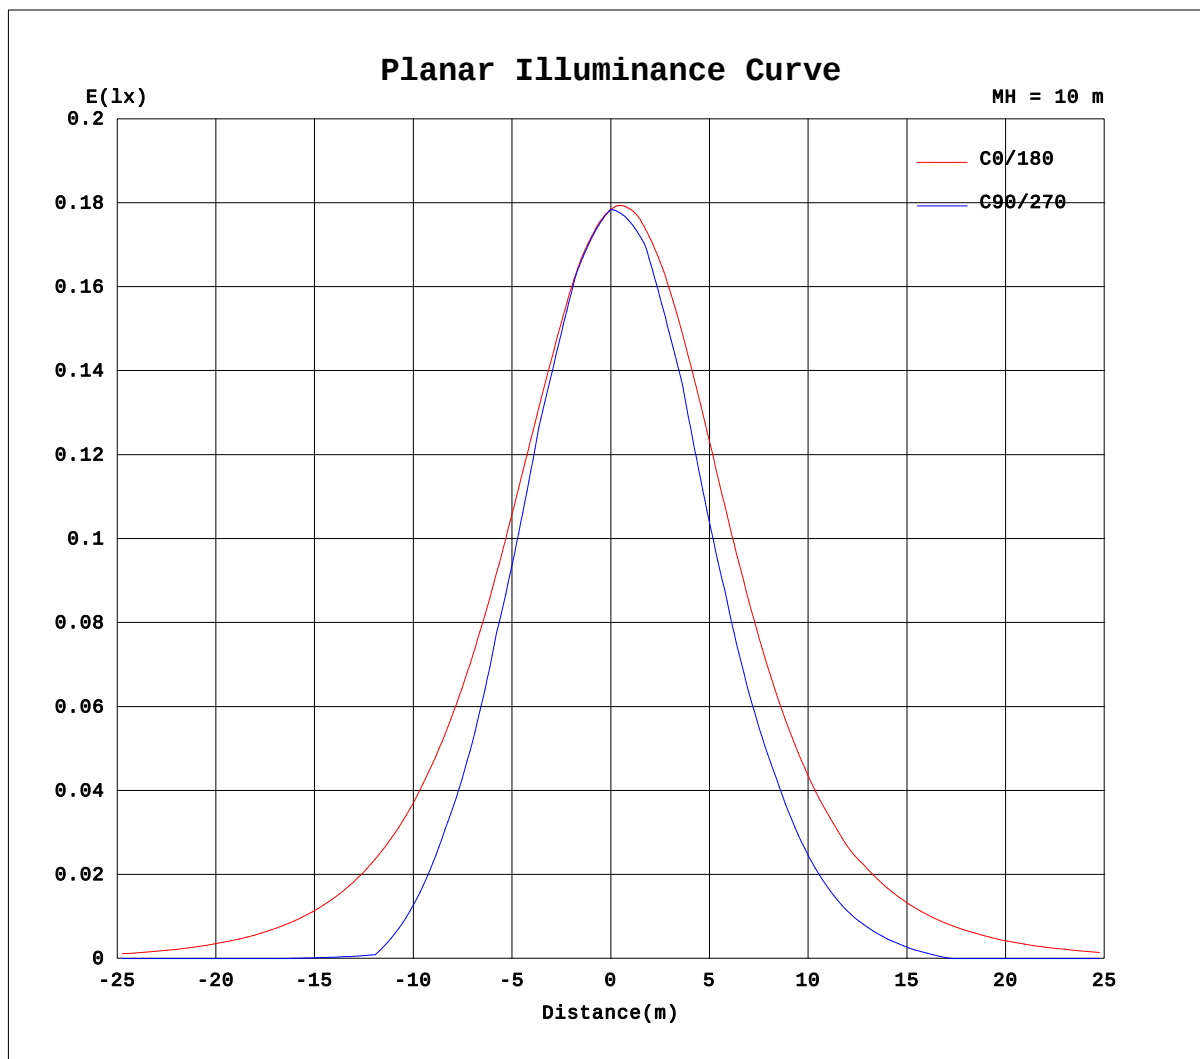

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-05-02

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.0956A P:11.14W PF:0.9692 Lamp Flux:34.8667x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	1.36	1.58	1.67	1.66	1.45	1.20	0.93	0.65	0.39	0.19	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	2.12	2.81	3.23	3.38	3.23	2.81	2.30	1.74	1.19	0.70	0.33	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.05	1.54	3.08	4.05	4.76	5.37	5.67	5.72	5.44	4.98	4.46	4.01	3.64	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.54	3.43	4.59	5.51	6.64	7.55	8.13	8.55	8.42	8.00	7.54	7.15	6.83	
-35	0.00	0.00	0.00	0.00	0.00	0.22	1.78	4.05	5.32	6.73	7.96	9.04	9.81	10.4	10.5	10.3	10.0	9.71	9.44	
-30	0.00	0.00	0.00	0.00	0.00	1.36	3.79	5.25	6.70	8.38	9.81	10.9	11.7	12.3	12.6	12.6	12.4	12.2	12.0	
-25	0.00	0.00	0.00	0.00	0.32	1.60	3.92	5.88	7.47	9.28	10.8	12.0	13.0	13.7	14.0	14.1	14.0	13.9	13.6	
-20	0.00	0.00	0.00	0.00	1.11	3.08	4.84	7.16	9.03	10.8	12.3	13.6	14.6	15.2	15.6	15.7	15.6	15.5	15.2	
-15	0.00	0.00	0.00	0.00	0.67	3.11	4.98	7.23	9.20	11.1	12.7	14.1	15.2	15.9	16.4	16.5	16.5	16.4	16.2	
-10	0.00	0.00	0.00	0.00	1.25	3.90	6.04	8.13	10.1	12.0	13.6	15.0	16.1	16.9	17.3	17.4	17.4	17.3	17.0	
-5	0.00	0.00	0.00	0.00	1.16	3.69	5.82	7.94	9.89	11.9	13.6	15.1	16.2	17.1	17.6	17.8	17.8	17.7	17.5	
0	0.00	0.00	0.00	0.00	2.10	4.34	6.46	8.59	10.5	12.5	14.2	15.6	16.7	17.5	18.0	18.2	18.2	18.1	17.8	
5	0.00	0.00	0.00	0.00	1.51	3.80	5.92	8.05	10.0	12.1	13.8	15.3	16.5	17.4	17.9	18.2	18.2	18.1	17.8	
10	0.00	0.00	0.00	0.00	1.87	4.11	6.22	8.35	10.4	12.3	14.1	15.6	16.7	17.5	18.0	18.2	18.1	18.0	17.7	
15	0.00	0.00	0.00	0.00	1.23	3.48	5.55	7.64	9.68	11.6	13.4	14.8	16.0	16.9	17.3	17.6	17.6	17.4	17.1	
20	0.00	0.00	0.00	0.00	1.52	3.68	5.72	7.76	9.74	11.6	13.3	14.7	15.7	16.5	16.9	17.0	16.9	16.7	16.4	
25	0.00	0.00	0.00	0.00	0.69	2.85	4.82	6.79	8.72	10.5	12.1	13.5	14.5	15.2	15.5	15.6	15.5	15.3	15.0	
30	0.00	0.00	0.00	0.00	0.77	2.82	4.71	6.60	8.45	10.1	11.6	12.7	13.5	14.0	14.2	14.2	14.1	13.8	13.5	
35	0.00	0.00	0.00	0.00	0.16	1.85	3.70	5.48	7.22	8.75	10.0	11.0	11.8	12.2	12.4	12.3	12.1	11.9	11.6	
40	0.00	0.00	0.00	0.00	0.00	1.65	3.41	5.08	6.63	7.92	8.93	9.70	10.2	10.5	10.6	10.4	10.1	9.78	9.52	
45	0.00	0.00	0.00	0.00	0.00	0.64	2.24	3.79	5.19	6.31	7.18	7.79	8.21	8.36	8.30	8.05	7.67	7.29	6.99	
50	0.00	0.00	0.00	0.00	0.00	0.16	1.70	3.10	4.24	5.08	5.77	6.08	6.26	6.20	5.96	5.55	5.09	4.67	4.36	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.70	1.73	2.75	3.38	3.78	3.94	3.87	3.58	3.19	2.82	2.59	2.37	2.21	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	1.56	1.86	1.94	1.80	1.37	0.81	0.25	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	0.73	0.91	0.97	0.93	0.73	0.46	0.18	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.0956A P:11.14W PF:0.9692 Lamp Flux:34.8667x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.11	0.13	0.24	0.41	0.62	0.85	1.04	1.16	1.14	0.99	0.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.22	0.29	0.55	0.90	1.33	1.78	2.13	2.33	2.24	1.89	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	3.42	3.38	3.49	3.70	3.94	4.16	4.20	4.08	3.74	3.17	2.33	0.99	0.00	0.00	0.00	0.00	0.00	0.00
-40	6.58	6.49	6.50	6.60	6.66	6.58	6.24	5.73	5.04	4.17	3.12	1.48	0.00	0.00	0.00	0.00	0.00	0.00
-35	9.18	8.97	8.82	8.72	8.55	8.26	7.78	7.13	6.31	5.32	4.15	2.74	0.97	0.00	0.00	0.00	0.00	0.00
-30	11.7	11.4	11.1	10.8	10.3	9.78	9.10	8.24	7.21	6.03	4.68	3.20	1.54	0.00	0.00	0.00	0.00	0.00
-25	13.4	13.0	12.7	12.3	11.8	11.1	10.3	9.40	8.29	7.01	5.58	4.02	2.36	0.49	0.00	0.00	0.00	0.00
-20	14.9	14.5	14.1	13.5	12.9	12.2	11.2	10.1	8.88	7.45	5.88	4.18	2.42	0.63	0.00	0.00	0.00	0.00
-15	15.9	15.5	15.0	14.4	13.8	13.0	12.0	10.9	9.67	8.23	6.63	4.89	3.08	1.21	0.00	0.00	0.00	0.00
-10	16.8	16.2	15.6	15.0	14.3	13.4	12.4	11.3	9.91	8.39	6.71	4.89	2.99	1.06	0.00	0.00	0.00	0.00
-5	17.2	16.7	16.2	15.5	14.8	13.9	12.9	11.8	10.4	8.91	7.21	5.39	3.48	1.51	0.00	0.00	0.00	0.00
0	17.5	17.0	16.4	15.8	15.0	14.1	13.0	11.8	10.4	8.77	7.02	5.13	3.18	1.20	0.00	0.00	0.00	0.00
5	17.5	17.1	16.5	15.8	15.1	14.2	13.2	12.0	10.6	9.06	7.34	5.47	3.53	1.54	0.00	0.00	0.00	0.00
10	17.4	16.9	16.3	15.7	14.9	14.0	12.9	11.7	10.3	8.69	6.93	5.05	3.09	1.10	0.00	0.00	0.00	0.00
15	16.8	16.4	15.9	15.2	14.5	13.7	12.7	11.5	10.2	8.65	6.96	5.13	3.23	1.29	0.00	0.00	0.00	0.00
20	16.1	15.6	15.2	14.5	13.8	13.0	12.0	10.9	9.50	7.97	6.27	4.47	2.59	0.70	0.00	0.00	0.00	0.00
25	14.7	14.3	13.8	13.3	12.7	12.0	11.2	10.2	9.03	7.66	6.11	4.41	2.63	0.80	0.00	0.00	0.00	0.00
30	13.1	12.7	12.3	11.9	11.3	10.7	10.0	9.11	8.04	6.76	5.29	3.66	1.92	0.18	0.00	0.00	0.00	0.00
35	11.2	10.9	10.5	10.2	9.87	9.37	8.82	8.08	7.18	6.09	4.81	3.34	1.73	0.27	0.00	0.00	0.00	0.00
40	9.19	8.89	8.67	8.48	8.23	7.86	7.36	6.72	5.90	4.93	3.77	2.40	0.89	0.00	0.00	0.00	0.00	0.00
45	6.71	6.50	6.41	6.35	6.25	6.07	5.76	5.31	4.70	3.94	3.00	1.84	0.60	0.00	0.00	0.00	0.00	0.00
50	4.13	4.07	4.12	4.20	4.21	4.18	4.00	3.69	3.22	2.60	1.79	0.76	0.00	0.00	0.00	0.00	0.00	0.00
55	2.08	2.03	2.05	2.09	2.10	2.10	2.18	2.13	1.91	1.50	0.99	0.49	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.04	0.37	0.50	0.46	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.25	0.25	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: