

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	318.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	141.3V x 179.9H
	At 50% of Imax	101.1V x 134.1H
	At 90% of Imax	45.8V x 59.3H

Beam Flux	Total	997.0 lumens per klm.
	To 10% of Imax	991.4 lumens per klm.
	To 50% of Imax	757.1 lumens per klm.
	To 90% of Imax	198.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.0947A P:11.02W PF:0.9684 Lamp Flux:372.765x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

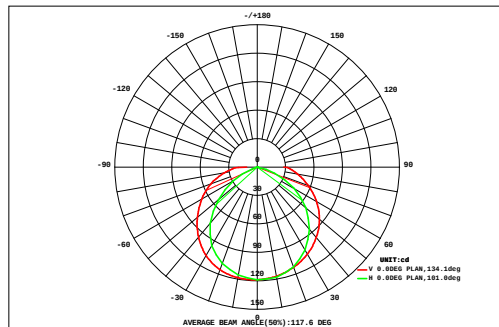

DATA OF LAMP		Eff:33.83lm/W	
MODEL: LLS-OP-D50-L12-RDM(AL)		Imax(cd)	118.9
NOMINAL POWER(W)	12	AVAILABILITY(%)	99.7
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	371.6
NOMINAL FLUX(lm)	372.765	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	372.8
TEST VOLTAGE(V)	120.2	θ @50%(H,V)	134, 101DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.08	0.26	0.49	0.73	0.86	0.85	0.70	0.44	0.25	0.24	0.41	0.69	0.88	0.93	0.82	0.58	0.33	0.10	9.64	9.42
70	0.07	0.24	0.48	0.78	1.02	1.13	1.14	1.07	0.98	0.97	1.03	1.11	1.12	1.02	0.81	0.55	0.30	0.09	13.9	13.9
60	0.07	0.27	0.56	0.93	1.25	1.52	1.67	1.73	1.72	1.70	1.68	1.62	1.48	1.25	0.95	0.62	0.32	0.09	19.4	19.4
50	0.07	0.29	0.63	1.05	1.47	1.85	2.15	2.30	2.34	2.31	2.22	2.06	1.81	1.47	1.08	0.69	0.34	0.09	24.2	24.2
40	0.08	0.31	0.69	1.15	1.66	2.14	2.52	2.76	2.85	2.82	2.67	2.43	2.09	1.67	1.20	0.75	0.37	0.10	28.3	28.3
30	0.08	0.33	0.73	1.23	1.80	2.36	2.83	3.12	3.25	3.22	3.04	2.73	2.32	1.83	1.29	0.79	0.38	0.10	31.5	31.5
	0.08	0.34	0.76	1.28	1.89	2.51	3.02	3.36	3.51	3.48	3.28	2.94	2.48	1.93	1.35	0.82	0.39	0.10	33.5	33.5
	0.08	0.35	0.77	1.31	1.93	2.56	3.09	3.45	3.61	3.58	3.38	3.02	2.54	1.97	1.38	0.84	0.40	0.10	34.4	34.4
	0.07	0.35	0.77	1.31	1.92	2.54	3.06	3.41	3.57	3.54	3.34	2.99	2.52	1.96	1.38	0.84	0.40	0.10	34.1	34.1
	0.05	0.31	0.74	1.26	1.85	2.44	2.94	3.26	3.41	3.39	3.20	2.88	2.43	1.90	1.34	0.82	0.39	0.08	32.7	32.7
	0.04	0.25	0.68	1.17	1.72	2.26	2.70	2.99	3.11	3.10	2.94	2.66	2.26	1.78	1.27	0.78	0.34	0.07	30.1	30.1
-30	0.04	0.19	0.57	1.05	1.52	1.98	2.36	2.59	2.66	2.64	2.53	2.33	2.02	1.62	1.18	0.70	0.29	0.08	26.4	26.4
-40	0.04	0.17	0.44	0.90	1.31	1.66	1.92	2.02	2.03	2.00	1.95	1.87	1.70	1.41	1.05	0.59	0.29	0.08	21.4	21.4
-50	0.05	0.17	0.36	0.72	1.09	1.28	1.35	1.33	1.28	1.26	1.28	1.31	1.29	1.17	0.89	0.53	0.28	0.08	15.7	15.7
-60	0.05	0.16	0.30	0.56	0.82	0.88	0.83	0.70	0.56	0.54	0.65	0.80	0.90	0.89	0.71	0.48	0.26	0.07	10.2	10.0
-70	0.04	0.14	0.25	0.43	0.56	0.54	0.39	0.18	0.07	0.06	0.15	0.37	0.56	0.64	0.55	0.41	0.23	0.07	5.62	5.05
-80	0.02	0.06	0.11	0.17	0.19	0.15	0.06	0.00	0.00	0.00	0.00	0.06	0.17	0.24	0.22	0.17	0.10	0.03	1.75	1.54
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	1.01	4.21	9.35	16.0	22.9	28.7	32.7	34.7	35.2	34.8	33.8	31.9	28.6	23.7	17.5	11.0	5.40	1.43	373	---
Φ a	1.01	4.21	9.35	16.0	22.9	28.6	32.6	34.5	35.0	34.7	33.5	31.7	28.5	23.7	17.5	11.0	5.40	1.43	---	372

one-half-peak spread: U:47.9,D:53.7 , L:63.8,R:71.0


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.0947A P:11.02W PF:0.9684 Lamp Flux:372.765x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

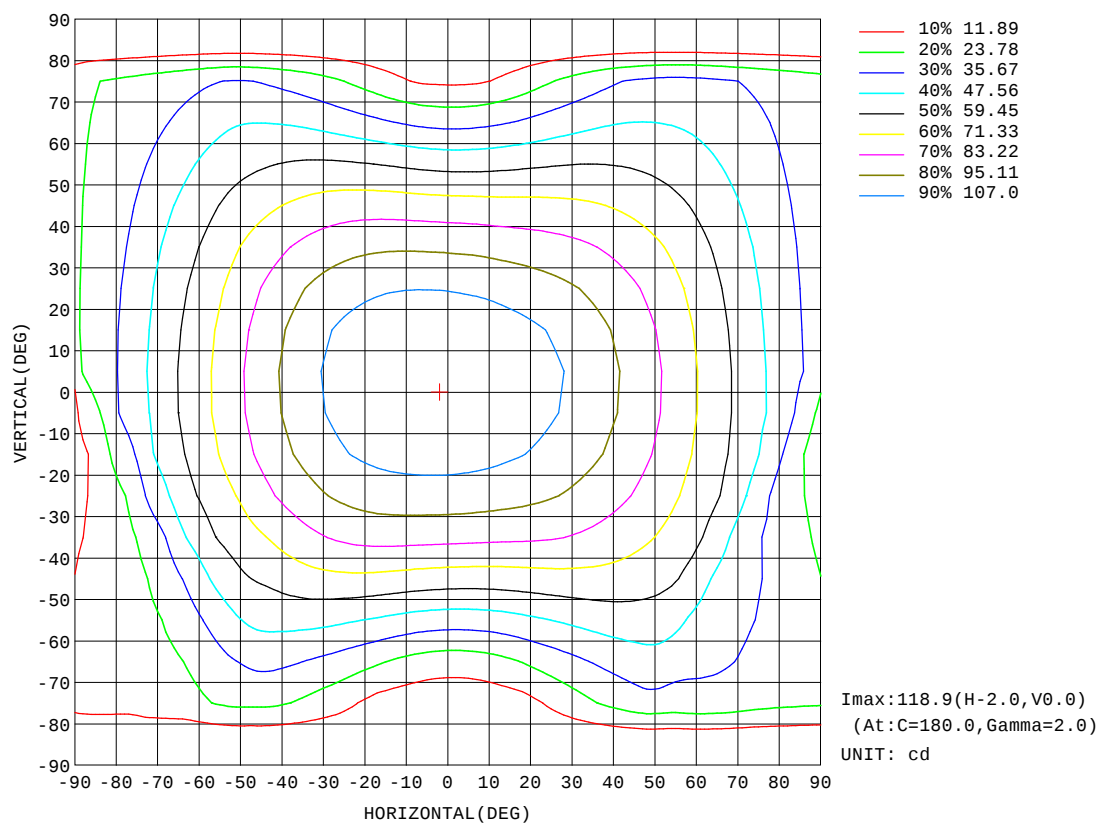


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.0947A P:11.02W PF:0.9684 Lamp Flux:372.765x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

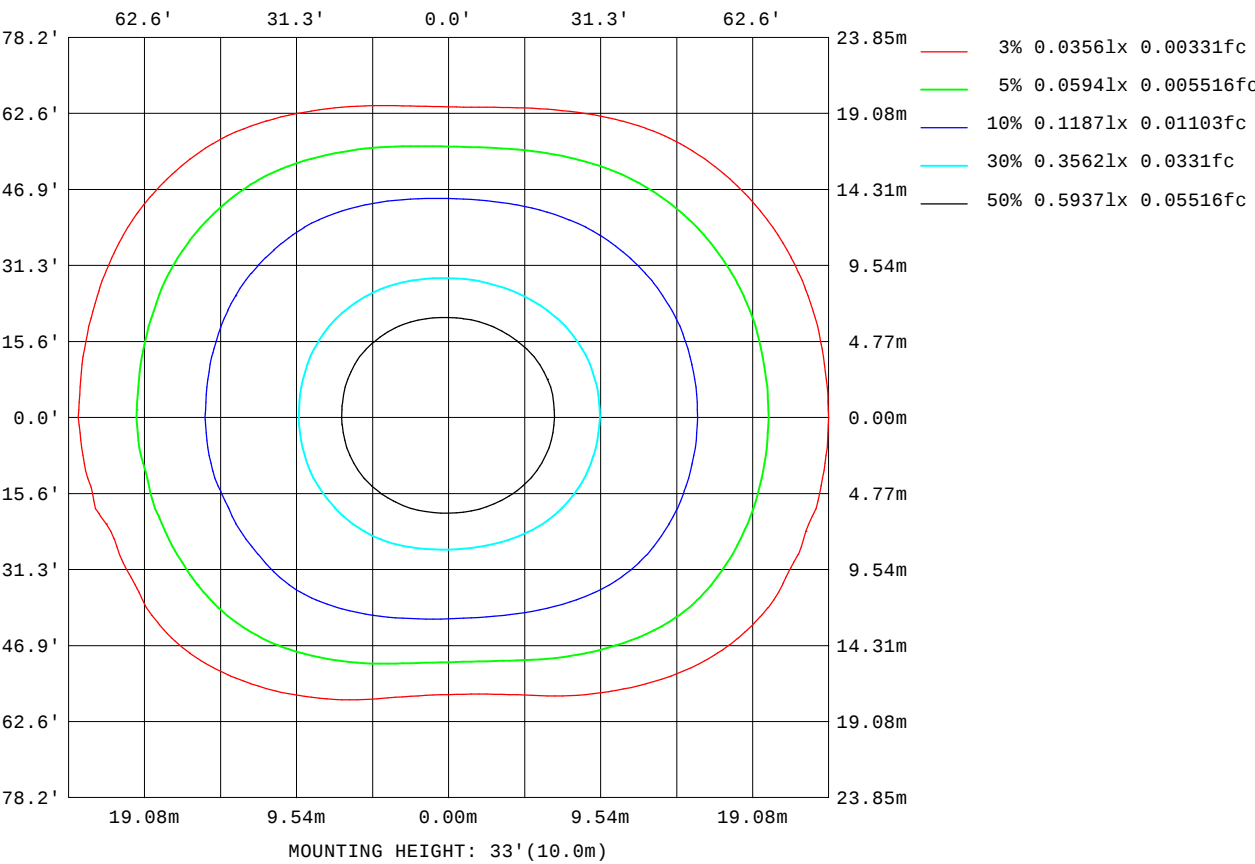


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.2V I:0.0947A P:11.02W PF:0.9684 Lamp Flux:372.765x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

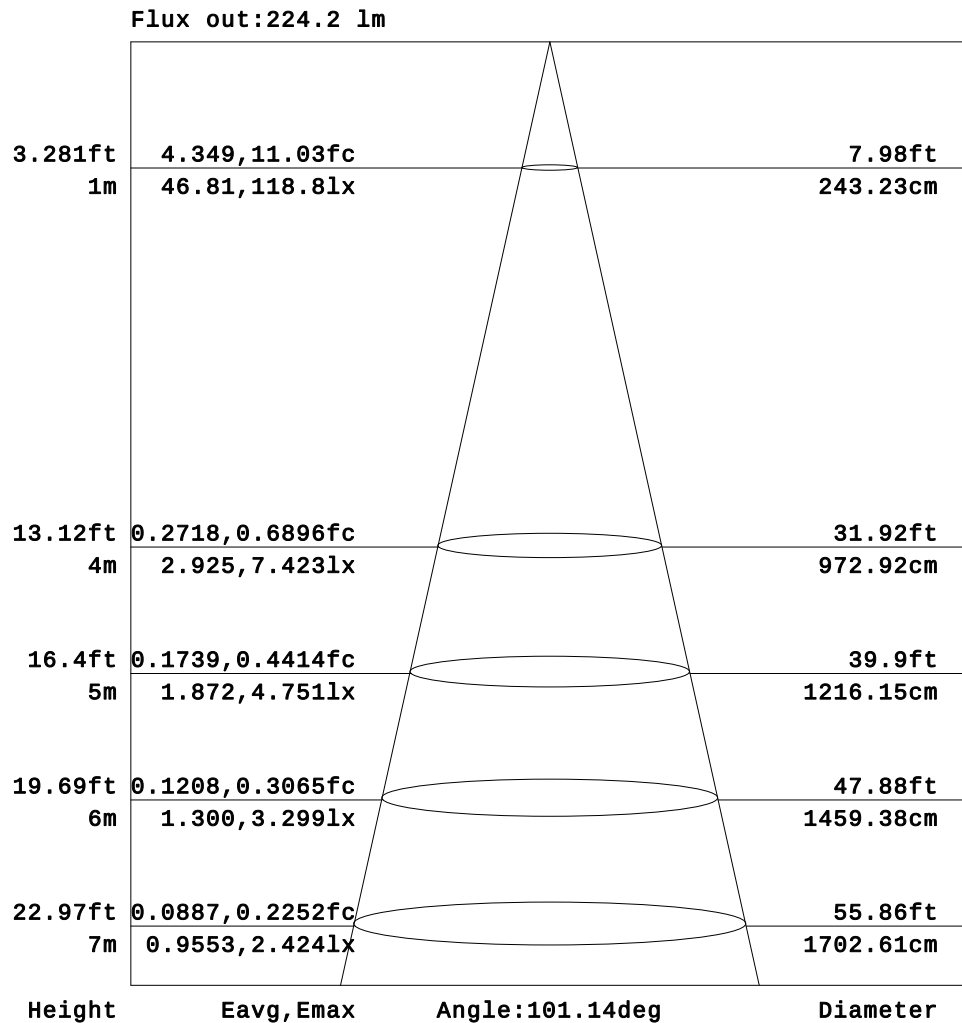


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

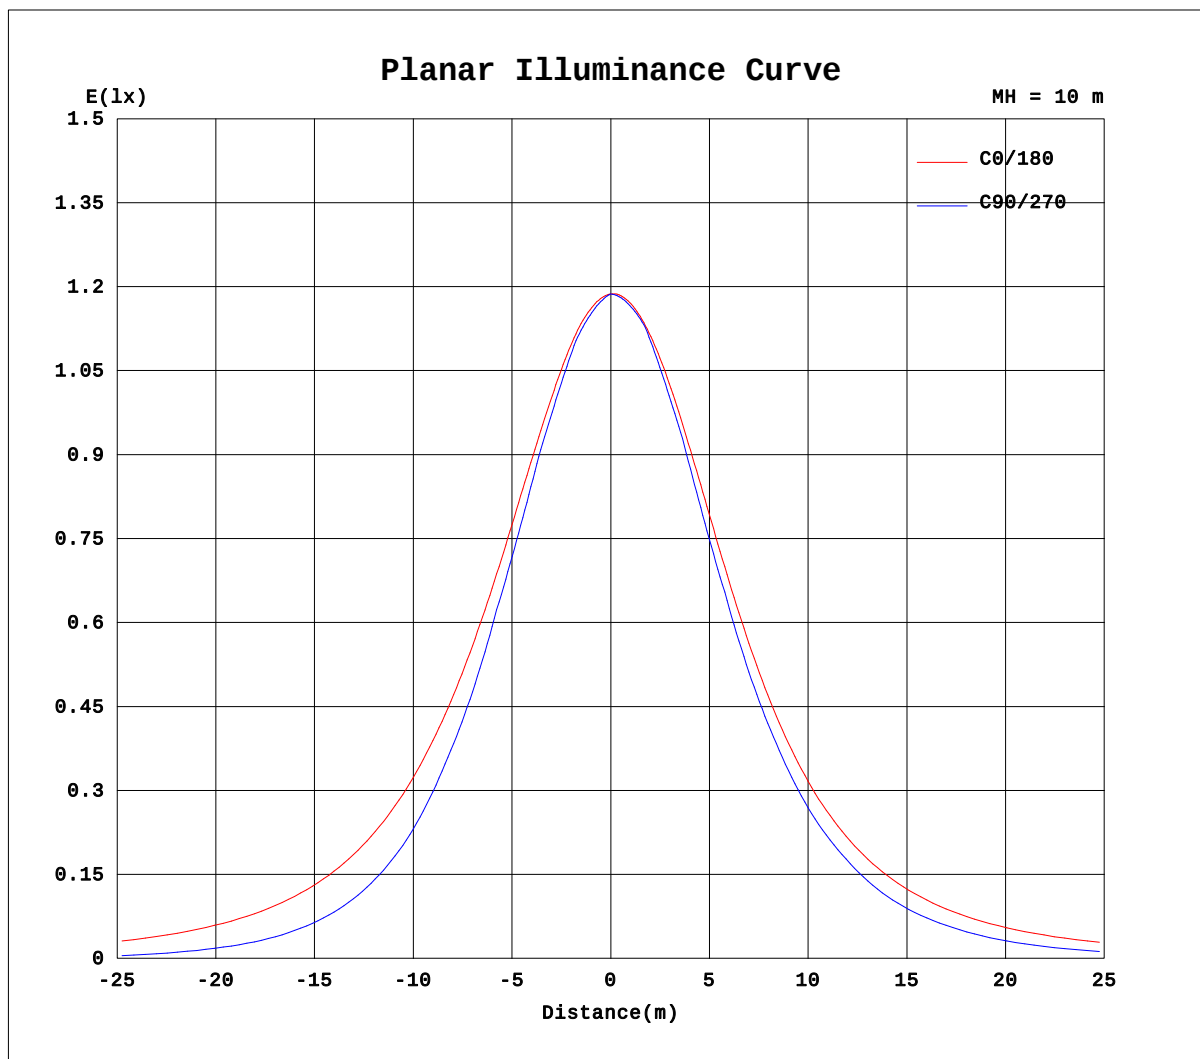

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.0947A P:11.02W PF:0.9684 Lamp Flux:372.765x1 lm																	
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:20240500005					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1		UNIT: cd																	
H(DEG)\V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	15.6	15.8	15.5	15.6	16.9	17.6	19.2	21.4	22.0	21.0	18.8	15.6	12.1	8.11	3.14	0.00	0.00	0.00	0.00
-75	15.5	16.5	16.3	17.0	18.5	19.3	21.7	24.9	26.5	26.5	24.9	22.0	18.6	14.9	10.3	6.76	5.01	3.66	3.04
-70	15.3	17.1	17.1	18.5	20.2	20.9	24.3	28.4	30.9	31.9	31.0	28.4	25.1	21.6	17.5	13.5	10.0	7.33	6.09
-65	14.9	17.1	17.5	19.6	21.3	23.0	27.5	32.4	36.1	38.6	37.8	35.7	33.2	30.4	27.2	23.9	20.8	18.5	17.5
-60	14.5	17.1	17.8	20.8	22.5	25.0	30.7	36.5	41.4	45.4	44.6	43.0	41.3	39.2	36.9	34.4	31.6	29.7	28.9
-55	14.0	16.6	18.5	21.2	23.1	27.9	34.5	41.1	47.3	50.7	51.3	51.2	50.6	49.1	47.4	45.5	43.5	42.0	41.3
-50	13.5	16.1	19.2	21.7	23.8	30.7	38.2	45.6	53.2	56.0	58.0	59.5	59.9	59.1	57.9	56.6	55.4	54.4	53.7
-45	12.2	15.6	19.2	21.7	26.3	34.2	42.7	51.5	57.5	60.8	63.8	66.5	68.2	68.8	68.8	68.1	67.1	66.2	65.6
-40	10.8	15.0	19.3	21.7	28.8	37.7	47.2	57.4	61.8	65.6	69.6	73.6	76.5	78.6	79.7	79.5	78.8	78.0	77.5
-35	9.61	14.7	18.7	24.1	31.9	43.5	52.8	60.6	65.2	70.3	75.1	79.4	82.8	85.4	87.0	87.6	87.4	87.1	86.7
-30	8.40	14.5	18.1	26.4	35.1	49.4	58.4	63.8	68.6	75.0	80.6	85.2	89.1	92.2	94.4	95.6	96.0	96.1	96.0
-25	7.75	14.4	19.9	29.4	42.0	52.7	60.1	66.9	72.7	79.3	85.0	90.0	94.3	97.6	99.9	101	102	102	102
-20	7.11	14.3	21.7	32.4	48.9	56.0	61.8	70.0	76.8	83.5	89.4	94.9	99.5	103	106	107	108	108	108
-15	4.95	15.5	27.9	36.9	49.3	57.4	63.9	71.8	78.8	85.6	91.9	97.6	102	106	109	111	112	112	112
-10	2.79	16.7	34.1	41.4	49.7	58.8	66.1	73.6	80.8	87.8	94.4	100	105	109	112	114	115	116	116
-5	7.07	21.8	34.7	42.5	51.0	59.4	66.8	74.3	81.6	88.7	95.4	101	107	111	114	116	117	117	117
0	11.3	27.0	35.3	43.5	52.4	60.1	67.4	74.9	82.4	89.6	96.4	103	108	112	115	117	118	119	119
5	15.7	28.0	35.3	43.2	52.0	59.7	67.0	74.5	82.0	89.2	96.1	102	108	112	115	117	118	119	118
10	20.0	28.9	35.2	43.0	51.6	59.3	66.6	74.0	81.5	88.8	95.7	102	107	111	114	117	118	118	118
15	20.1	28.7	35.0	42.5	51.0	58.6	65.7	73.0	80.4	87.5	94.1	100	105	109	112	114	115	115	115
20	20.1	28.6	34.7	42.1	50.5	58.0	64.9	72.1	79.2	86.1	92.5	98.3	103	107	110	111	112	112	112
25	20.1	28.2	34.1	41.2	49.2	56.5	63.3	70.1	76.9	83.4	89.3	94.5	98.9	102	105	106	107	107	106
30	20.1	27.9	33.4	40.2	48.0	55.1	61.6	68.1	74.6	80.7	86.1	90.7	94.6	97.5	99.5	101	101	101	101
35	19.9	27.5	32.7	39.0	46.3	53.2	59.5	65.6	71.5	76.8	81.5	85.5	88.8	91.3	92.8	93.7	93.8	93.6	93.2
40	19.8	27.1	31.9	37.8	44.6	51.3	57.3	63.0	68.3	72.9	76.9	80.3	83.1	85.0	86.2	86.6	86.4	85.9	85.5
45	19.8	26.6	31.0	36.4	42.6	48.8	54.5	59.7	64.3	68.1	71.3	74.1	76.2	77.6	78.1	78.0	77.5	76.8	76.3
50	19.8	26.2	30.1	35.0	40.5	46.4	51.7	56.4	60.3	63.3	65.8	67.8	69.4	70.1	70.0	69.4	68.5	67.6	67.0
55	19.7	25.6	29.1	33.5	38.2	43.4	48.4	52.9	56.0	58.1	59.8	60.8	61.1	60.7	59.9	58.8	57.5	56.3	55.7
60	19.6	25.1	28.1	32.0	36.0	40.5	45.2	49.3	51.8	53.0	53.8	53.8	52.9	51.4	49.7	48.1	46.5	45.1	44.4
65	19.7	24.6	27.2	30.5	33.8	37.5	41.3	44.8	47.0	47.4	47.0	45.8	44.0	41.7	39.3	36.9	34.6	32.8	32.0
70	19.8	24.1	26.3	28.9	31.6	34.4	37.3	40.4	42.3	41.9	40.2	37.8	35.0	32.0	28.9	25.6	22.7	20.6	19.7
75	19.7	23.3	25.3	27.3	29.4	31.5	33.7	35.5	36.2	35.0	33.0	30.4	27.4	23.7	19.8	15.9	12.4	10.3	9.85
80	19.7	22.5	24.2	25.8	27.2	28.7	30.1	30.6	30.1	28.2	25.8	23.1	19.7	15.4	10.7	6.13	2.21	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.0947A P:11.02W PF:0.9684 Lamp Flux:372.765x1 lm																	
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:20240500005		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	2.08	7.22	12.2	17.0	21.4	25.3	26.8	27.0	28.5	28.0	26.6	25.3	25.0	25.2	25.4
-75	3.29	4.30	6.02	9.08	13.9	18.5	22.9	26.9	30.5	32.0	31.0	32.0	31.6	30.0	28.1	26.7	25.9	25.3
-70	6.58	8.60	12.0	16.1	20.6	24.8	28.8	32.5	35.6	37.2	35.0	35.5	35.2	33.5	30.8	28.4	26.7	25.2
-65	17.8	19.4	22.2	25.7	29.3	32.9	36.2	39.3	41.8	43.1	40.1	38.2	37.3	35.3	32.4	29.5	27.2	25.2
-60	29.0	30.2	32.4	35.4	38.1	40.9	43.6	46.1	47.9	49.0	45.2	41.0	39.4	37.2	34.1	30.6	27.7	25.1
-55	41.3	42.0	43.5	45.6	47.6	49.8	51.8	53.4	54.2	54.0	50.9	44.7	41.0	38.5	35.1	31.4	27.6	24.9
-50	53.5	53.8	54.7	55.8	57.2	58.7	60.0	60.7	60.4	59.1	56.5	48.5	42.5	39.8	36.1	32.3	27.5	24.6
-45	65.3	65.4	65.8	66.5	67.2	67.6	67.6	67.0	65.5	63.3	60.2	53.7	45.4	40.1	36.4	32.3	27.4	23.9
-40	77.1	76.9	76.9	77.2	77.3	76.6	75.1	73.2	70.7	67.6	63.9	58.9	48.3	40.4	36.8	32.4	27.3	23.2
-35	86.3	85.8	85.4	85.0	84.2	82.7	80.7	78.1	75.0	71.3	67.0	61.9	53.7	44.0	36.4	32.0	27.0	22.0
-30	95.6	94.8	93.9	92.7	91.1	88.9	86.2	83.0	79.3	75.0	70.2	64.8	59.1	47.6	36.1	31.6	26.6	20.7
-25	102	101	99.5	98.0	96.0	93.5	90.4	86.8	82.5	77.8	72.4	66.7	60.5	51.5	40.9	31.5	25.0	18.6
-20	108	107	105	103	101	98.0	94.6	90.5	85.8	80.5	74.7	68.5	62.0	55.4	45.7	31.3	23.3	16.4
-15	111	110	108	106	104	101	97.1	92.8	87.9	82.4	76.3	69.8	63.1	56.2	47.9	37.4	25.7	13.1
-10	115	114	112	110	107	104	99.6	95.1	90.0	84.2	77.9	71.2	64.2	57.0	50.1	43.4	28.0	9.87
-5	116	115	113	111	108	105	101	96.1	90.8	84.9	78.5	71.6	64.5	57.2	50.2	43.4	32.5	18.9
0	118	117	115	112	109	106	102	97.0	91.6	85.6	79.1	72.0	64.8	57.4	50.3	43.4	36.9	28.0
5	118	116	114	112	109	106	101	96.7	91.3	85.3	78.8	71.8	64.6	57.2	50.1	43.2	36.7	29.2
10	117	116	114	112	109	105	101	96.4	91.0	85.1	78.5	71.6	64.3	57.0	49.9	43.0	36.5	30.4
15	114	113	111	109	106	103	99.0	94.5	89.3	83.5	77.2	70.4	63.3	56.2	49.2	42.5	36.2	30.3
20	111	110	108	106	104	100	96.8	92.5	87.5	82.0	75.8	69.2	62.3	55.4	48.6	42.0	35.9	30.2
25	106	105	103	101	98.9	96.1	92.9	89.1	84.6	79.5	73.8	67.6	61.0	54.4	47.9	41.6	35.7	30.1
30	100	99.2	97.7	96.0	94.1	91.8	89.0	85.6	81.7	77.0	71.8	65.9	59.7	53.4	47.2	41.2	35.4	30.0
35	92.7	91.7	90.6	89.4	87.9	86.1	83.8	80.9	77.4	73.4	68.7	63.4	57.7	51.8	45.9	40.3	34.9	29.8
40	85.1	84.2	83.4	82.7	81.7	80.4	78.5	76.1	73.2	69.7	65.6	60.9	55.6	50.2	44.6	39.4	34.3	29.6
45	75.9	75.4	75.1	74.8	74.3	73.6	72.4	70.6	68.3	65.5	62.0	57.9	53.2	48.2	43.2	38.4	33.8	29.3
50	66.7	66.5	66.7	66.9	66.9	66.8	66.2	65.1	63.4	61.2	58.4	55.0	50.8	46.3	41.8	37.4	33.2	29.1
55	55.6	56.0	56.8	57.7	58.5	59.2	59.4	59.1	58.2	56.7	54.5	51.7	48.1	44.2	40.2	36.3	32.6	29.0
60	44.5	45.4	46.9	48.4	50.1	51.7	52.7	53.1	53.0	52.1	50.6	48.5	45.4	42.1	38.7	35.3	32.1	28.9
65	32.4	33.6	35.6	38.0	40.7	43.2	45.3	46.9	47.7	47.5	46.8	45.2	42.8	40.0	37.2	34.4	31.6	28.9
70	20.2	21.9	24.3	27.7	31.3	34.6	37.9	40.7	42.3	43.0	42.9	42.0	40.2	38.0	35.7	33.5	31.2	28.9
75	10.1	11.8	14.9	19.0	23.3	27.2	31.0	34.4	36.9	38.6	39.2	38.7	37.3	35.7	34.0	32.2	30.5	28.7
80	0.00	1.66	5.56	10.3	15.2	19.9	24.2	28.1	31.5	34.2	35.5	35.4	34.5	33.4	32.2	31.0	29.8	28.5
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-05-02

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks: