

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	318.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	141.8V x 179.9H
	At 50% of Imax	101.5V x 134.2H
	At 90% of Imax	46.8V x 59.4H

Beam Flux	Total	997.0 lumens per klm.
	To 10% of Imax	991.5 lumens per klm.
	To 50% of Imax	759.3 lumens per klm.
	To 90% of Imax	203.6 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.2V I:0.0563A P:10.66W PF:0.6838 Lamp Flux:374.25lx1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

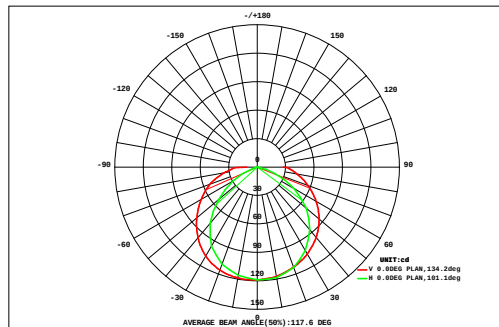

DATA OF LAMP		Eff:35.10lm/W	
MODEL: LLS-OP-D50-L12-RDM(AL)		Imax(cd)	119.0
NOMINAL POWER(W)	10	AVAILABILITY(%)	99.7
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	373.1
NOMINAL FLUX(lm)	374.251	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	374.3
TEST VOLTAGE(V)	277.2	θ @50%(H,V)	134, 101DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.08	0.27	0.50	0.74	0.88	0.86	0.71	0.45	0.25	0.24	0.42	0.69	0.87	0.93	0.81	0.58	0.33	0.10	9.69	9.46
70	0.07	0.25	0.49	0.79	1.04	1.15	1.15	1.08	0.99	0.97	1.04	1.11	1.12	1.02	0.81	0.55	0.29	0.09	14.0	14.0
60	0.07	0.27	0.57	0.94	1.27	1.54	1.69	1.74	1.73	1.70	1.68	1.62	1.49	1.25	0.95	0.62	0.32	0.09	19.5	19.5
50	0.08	0.30	0.64	1.06	1.49	1.87	2.17	2.32	2.36	2.33	2.23	2.07	1.81	1.47	1.08	0.68	0.34	0.09	24.4	24.4
40	0.08	0.32	0.70	1.17	1.68	2.16	2.55	2.78	2.87	2.84	2.69	2.44	2.10	1.67	1.20	0.74	0.36	0.10	28.5	28.5
30	0.08	0.34	0.74	1.25	1.82	2.39	2.85	3.15	3.27	3.24	3.05	2.74	2.33	1.83	1.29	0.79	0.38	0.10	31.6	31.6
	0.08	0.35	0.77	1.30	1.91	2.53	3.04	3.38	3.53	3.49	3.29	2.95	2.48	1.93	1.35	0.81	0.39	0.10	33.7	33.7
	0.08	0.35	0.78	1.32	1.95	2.58	3.10	3.46	3.62	3.59	3.38	3.02	2.53	1.97	1.38	0.83	0.40	0.10	34.4	34.4
	0.07	0.35	0.78	1.32	1.94	2.56	3.07	3.42	3.57	3.54	3.34	2.99	2.51	1.95	1.37	0.83	0.40	0.10	34.1	34.1
	0.05	0.32	0.75	1.28	1.87	2.47	2.96	3.28	3.42	3.39	3.21	2.88	2.43	1.89	1.33	0.81	0.38	0.08	32.8	32.8
	0.04	0.26	0.69	1.19	1.74	2.29	2.73	3.01	3.13	3.11	2.95	2.66	2.26	1.78	1.26	0.77	0.33	0.07	30.3	30.3
-30	0.04	0.20	0.58	1.07	1.55	2.01	2.38	2.60	2.67	2.64	2.53	2.33	2.02	1.62	1.17	0.69	0.29	0.08	26.5	26.5
-40	0.05	0.18	0.45	0.92	1.33	1.68	1.93	2.03	2.03	2.00	1.95	1.86	1.69	1.41	1.04	0.58	0.29	0.08	21.5	21.5
-50	0.05	0.17	0.37	0.73	1.10	1.30	1.36	1.34	1.28	1.26	1.28	1.30	1.28	1.16	0.88	0.52	0.28	0.08	15.7	15.7
-60	0.05	0.16	0.31	0.57	0.83	0.89	0.84	0.70	0.56	0.54	0.64	0.80	0.89	0.88	0.69	0.47	0.26	0.07	10.1	10.0
-70	0.04	0.14	0.26	0.44	0.56	0.55	0.40	0.18	0.07	0.06	0.15	0.36	0.55	0.63	0.54	0.40	0.22	0.07	5.61	5.04
-80	0.02	0.06	0.11	0.17	0.20	0.16	0.07	0.00	0.00	0.00	0.00	0.05	0.17	0.23	0.21	0.16	0.09	0.03	1.75	1.54
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	1.04	4.28	9.50	16.3	23.2	29.0	33.0	34.9	35.3	34.9	33.8	31.9	28.5	23.6	17.4	10.9	5.34	1.41	374	---
Φ a	1.03	4.28	9.50	16.3	23.2	28.9	32.9	34.7	35.2	34.8	33.6	31.7	28.5	23.6	17.4	10.9	5.34	1.41	---	373

one-half-peak spread: U:48.0,D:54.0 , L:62.4,R:71.6


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.2V I:0.0563A P:10.66W PF:0.6838 Lamp Flux:374.25lx1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

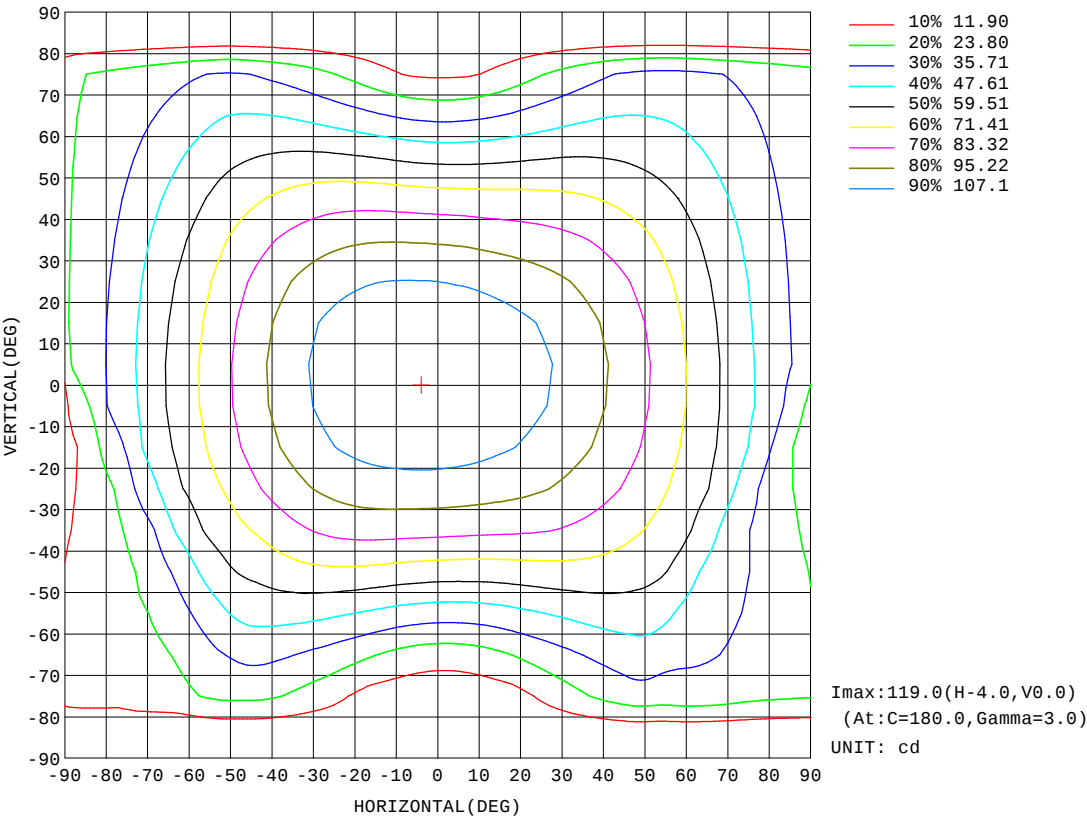


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.2V I:0.0563A P:10.66W PF:0.6838 Lamp Flux:374.25lx1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

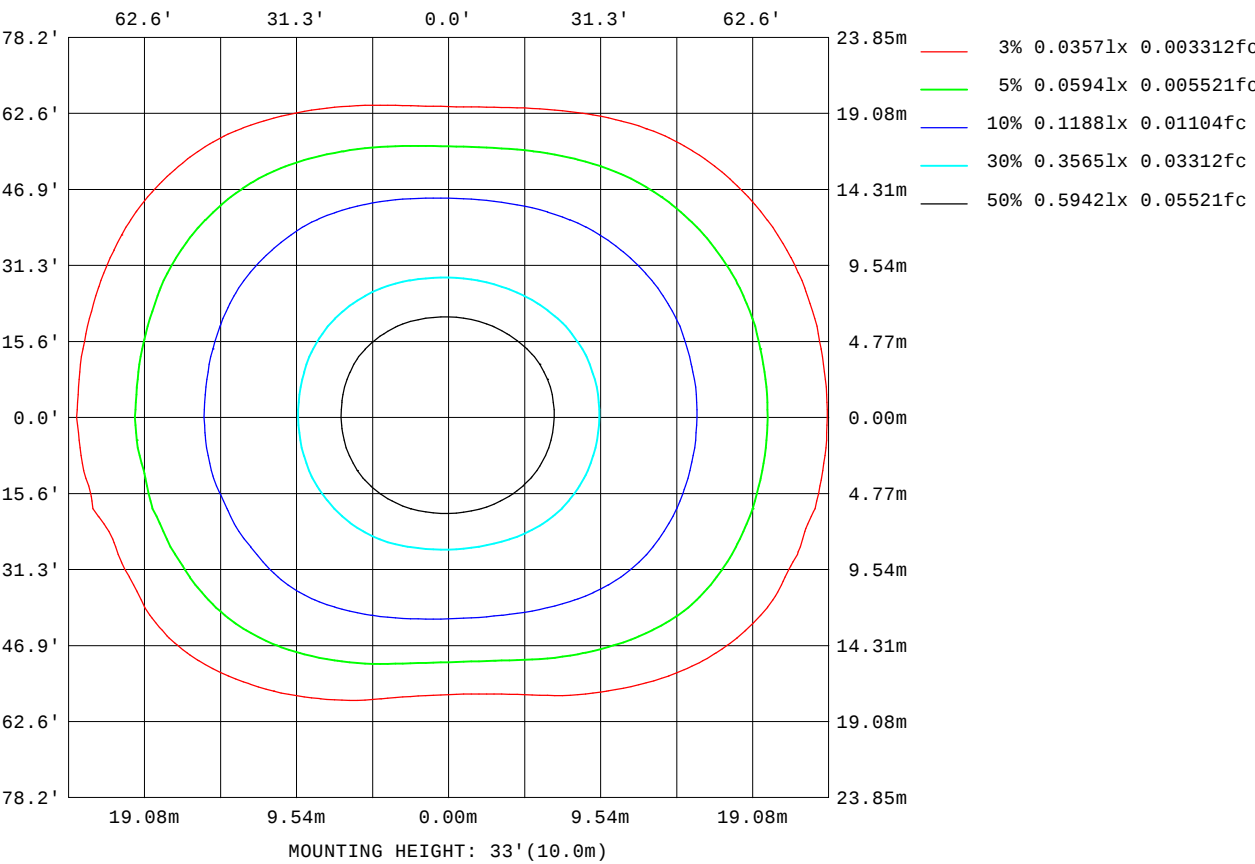


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.2V I:0.0563A P:10.66W PF:0.6838 Lamp Flux:374.25lx1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

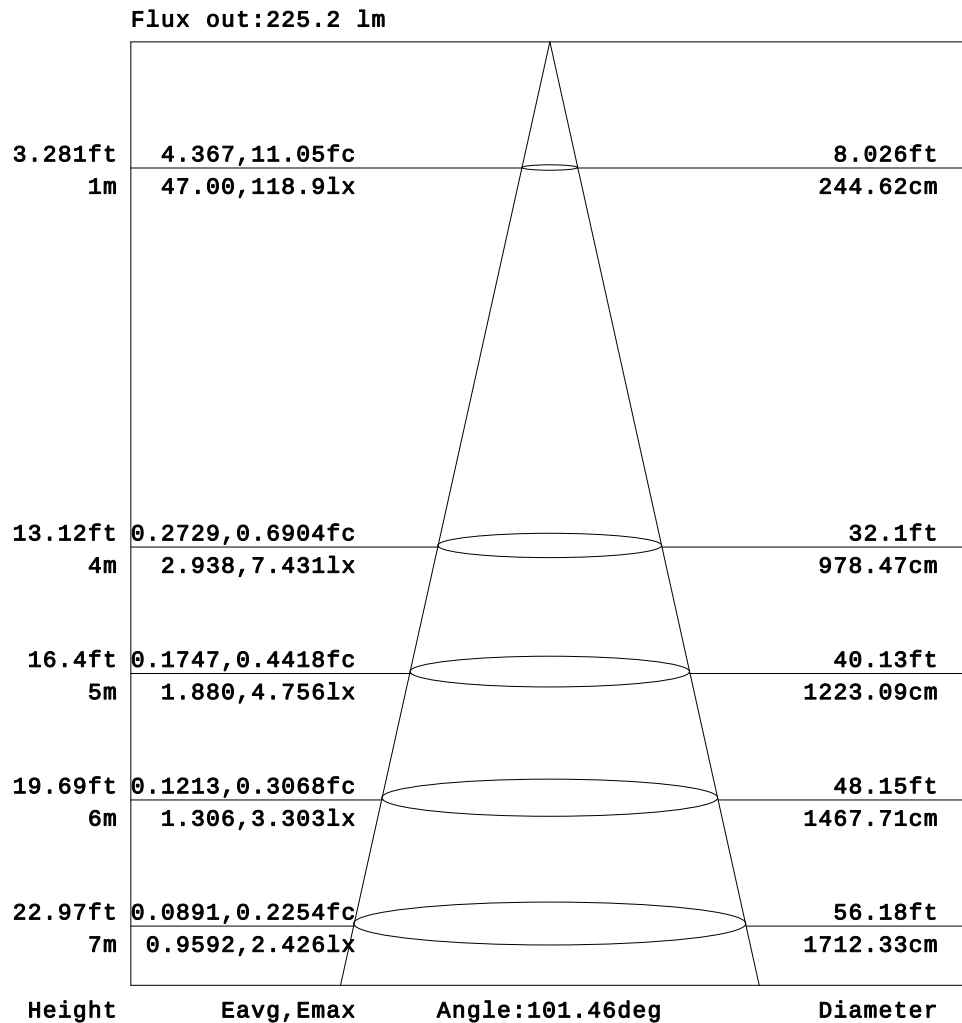


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

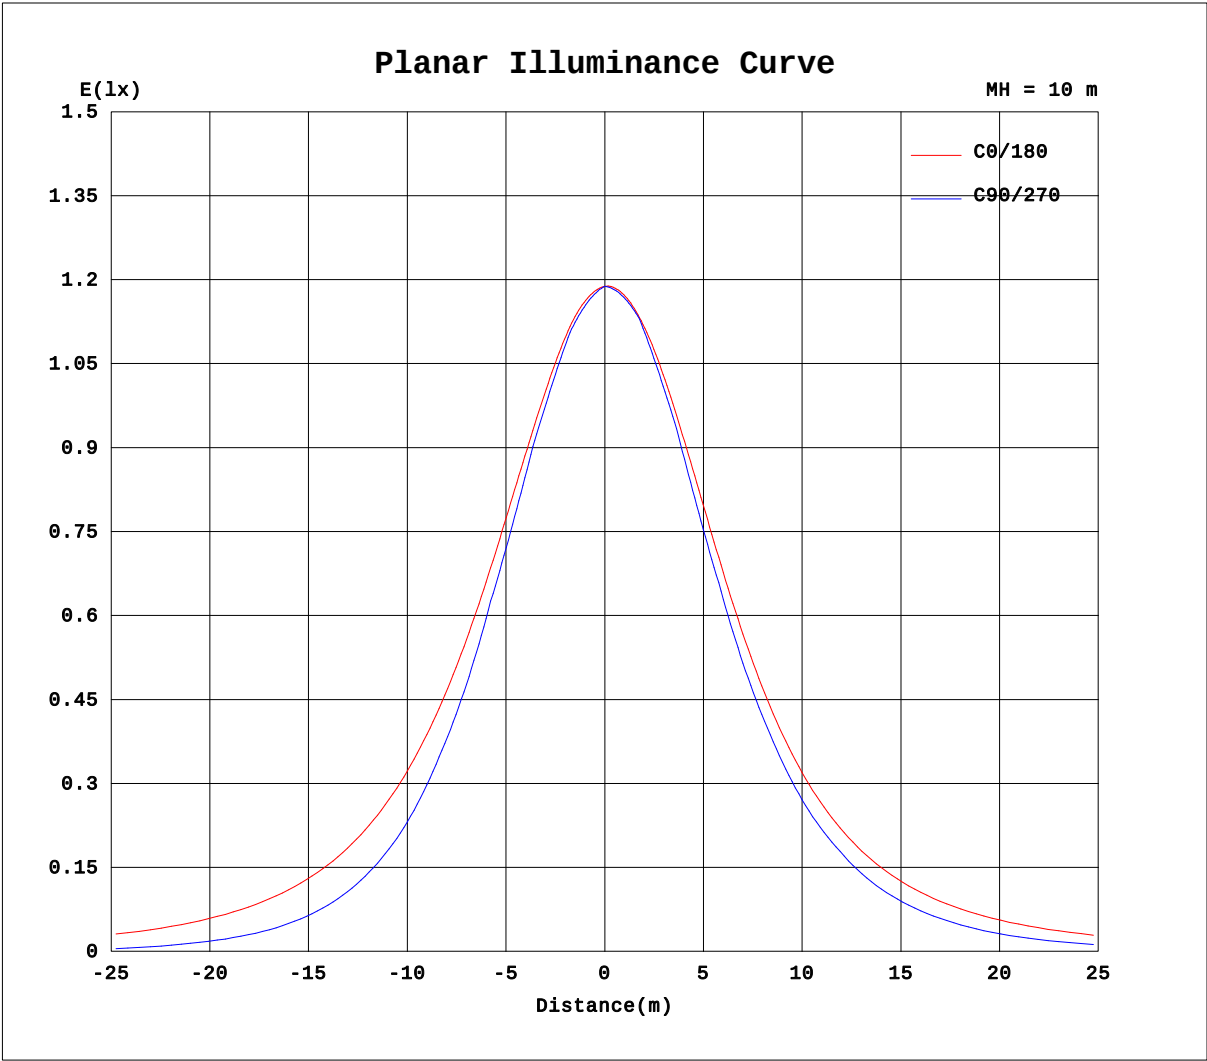

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.0563A P:10.66W PF:0.6838 Lamp Flux:374.251x1 lm																	
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:20240500010					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1																	
UNIT: cd																	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	16.0	16.1	15.9	16.1	17.3	18.1	19.6	21.8	22.3	21.3	19.1	15.8	12.3	8.35	3.34	0.00	0.00
-75	15.8	16.8	16.7	17.5	19.0	19.8	22.2	25.3	26.8	26.7	25.2	22.3	18.8	15.1	10.5	6.85	5.09
-70	15.6	17.5	17.5	18.9	20.7	21.5	24.7	28.8	31.2	32.1	31.2	28.7	25.4	21.9	17.7	13.7	10.2
-65	15.1	17.5	17.9	20.1	21.8	23.5	28.0	32.9	36.5	39.0	38.2	36.1	33.5	30.7	27.4	24.1	20.9
-60	14.7	17.6	18.3	21.3	23.0	25.4	31.2	37.0	41.9	45.9	45.1	43.4	41.6	39.4	37.1	34.6	31.7
-55	14.3	17.1	19.0	21.8	23.7	28.3	35.0	41.6	48.0	51.4	52.0	51.7	51.0	49.4	47.7	45.7	43.6
-50	13.8	16.6	19.7	22.2	24.4	31.2	38.9	46.2	54.1	57.0	58.9	60.0	60.3	59.4	58.2	56.8	55.5
-45	12.5	16.0	19.7	22.2	26.8	34.7	43.3	52.2	58.5	61.8	64.7	67.2	68.8	69.3	69.1	68.2	67.1
-40	11.1	15.4	19.8	22.2	29.3	38.3	47.7	58.3	62.8	66.6	70.5	74.4	77.2	79.2	80.0	79.6	78.8
-35	10.0	15.2	19.3	24.7	32.5	44.1	53.8	61.8	66.4	71.5	76.2	80.5	83.7	86.2	87.6	88.0	87.7
-30	8.93	15.1	18.8	27.3	35.6	50.0	59.8	65.2	70.0	76.4	82.0	86.5	90.3	93.2	95.2	96.3	96.6
-25	8.18	14.9	20.5	30.0	42.6	53.5	61.3	68.1	74.0	80.5	86.3	91.2	95.4	98.6	101	102	103
-20	7.44	14.7	22.2	32.8	49.7	57.0	62.8	71.1	77.9	84.6	90.6	96.0	100	104	106	108	109
-15	5.22	15.9	28.4	37.4	50.0	58.3	64.9	72.8	79.9	86.7	93.0	98.6	103	107	109	111	112
-10	3.01	17.0	34.6	42.1	50.4	59.6	67.0	74.5	81.8	88.8	95.3	101	106	110	113	115	116
-5	7.19	22.3	35.2	43.1	51.8	60.3	67.7	75.2	82.5	89.6	96.3	102	107	111	114	116	117
0	11.4	27.6	35.9	44.2	53.1	61.0	68.3	75.8	83.3	90.5	97.2	103	108	112	115	117	119
5	15.8	28.6	35.9	43.9	52.7	60.6	67.9	75.4	82.9	90.1	96.9	103	108	112	115	117	119
10	20.3	29.5	35.9	43.6	52.3	60.1	67.4	74.9	82.4	89.7	96.6	103	108	112	115	117	118
15	20.3	29.3	35.6	43.2	51.7	59.4	66.6	73.9	81.2	88.4	95.0	101	106	110	113	114	115
20	20.3	29.1	35.3	42.7	51.1	58.7	65.7	72.9	80.0	87.0	93.5	99.3	104	108	110	112	113
25	20.3	28.8	34.7	41.7	49.9	57.2	64.0	70.9	77.8	84.3	90.3	95.5	99.9	103	105	107	107
30	20.3	28.4	34.0	40.8	48.6	55.8	62.4	68.9	75.5	81.7	87.1	91.8	95.7	98.5	100	102	102
35	20.2	28.0	33.3	39.6	46.9	53.9	60.2	66.4	72.4	77.9	82.6	86.6	89.9	92.3	93.7	94.5	94.2
40	20.1	27.6	32.5	38.4	45.3	52.0	58.1	63.8	69.3	74.0	78.0	81.4	84.1	86.0	87.0	87.3	86.6
45	20.1	27.1	31.6	37.0	43.1	49.5	55.2	60.5	65.2	69.1	72.4	75.0	77.1	78.4	78.8	78.6	77.3
50	20.0	26.7	30.6	35.6	41.0	46.9	52.3	57.2	61.2	64.2	66.7	68.7	70.2	70.9	70.7	69.9	68.0
55	19.9	26.1	29.6	34.0	38.8	44.0	49.0	53.6	56.9	59.0	60.6	61.6	61.8	61.3	60.3	59.2	57.8
60	19.8	25.5	28.6	32.5	36.5	41.1	45.8	50.0	52.6	53.8	54.5	54.4	53.4	51.8	50.0	48.4	46.7
65	19.9	25.1	27.8	30.9	34.3	38.0	41.8	45.4	47.8	48.1	47.6	46.4	44.4	42.1	39.6	37.1	34.8
70	20.1	24.6	26.9	29.4	32.1	34.9	37.8	40.9	42.9	42.4	40.7	38.3	35.5	32.3	29.2	25.9	22.9
75	20.0	23.7	25.7	27.8	29.9	32.0	34.1	35.9	36.7	35.6	33.4	30.9	27.7	24.0	20.1	16.1	12.6
80	19.9	22.8	24.6	26.3	27.7	29.1	30.4	30.9	30.5	28.7	26.2	23.4	20.0	15.7	11.0	6.31	2.36
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.0563A P:10.66W PF:0.6838 Lamp Flux:374.251x1 lm		
NAME: 8.02.039.0013 LLS-OP-D50-L12-RDM(AL)-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	1.97	7.05	12.0	16.7	21.0	25.0	26.3	26.5	27.9	27.4	26.1	24.9	24.6	24.8	24.9	
-75	3.28	4.27	5.96	8.94	13.7	18.3	22.6	26.5	30.1	31.4	30.5	31.5	31.1	29.5	27.6	26.3	25.5	24.8	
-70	6.55	8.54	11.9	15.9	20.4	24.5	28.5	32.1	35.2	36.5	34.5	35.0	34.7	33.0	30.3	28.0	26.2	24.7	
-65	17.8	19.3	22.1	25.5	29.1	32.5	35.9	38.9	41.3	42.5	39.5	37.8	36.8	34.8	31.9	29.1	26.8	24.7	
-60	29.0	30.1	32.2	35.2	37.8	40.6	43.3	45.7	47.4	48.5	44.6	40.6	39.0	36.6	33.6	30.2	27.3	24.7	
-55	41.2	41.9	43.4	45.4	47.4	49.5	51.4	53.0	53.8	53.6	50.4	44.3	40.6	38.0	34.6	31.0	27.2	24.4	
-50	53.4	53.7	54.5	55.6	56.9	58.4	59.6	60.4	60.1	58.8	56.1	48.0	42.1	39.3	35.6	31.8	27.1	24.1	
-45	65.2	65.2	65.6	66.2	66.9	67.4	67.3	66.7	65.3	63.1	59.9	53.2	45.0	39.6	35.9	31.8	27.0	23.5	
-40	77.0	76.7	76.7	76.9	77.0	76.4	75.0	73.1	70.5	67.4	63.6	58.4	47.8	40.0	36.3	31.9	26.9	22.8	
-35	86.4	85.9	85.4	84.9	84.1	82.7	80.7	78.1	74.9	71.1	66.7	61.4	53.2	43.4	35.9	31.5	26.5	21.6	
-30	95.9	95.1	94.1	92.9	91.2	89.0	86.3	83.0	79.2	74.8	69.9	64.4	58.6	46.9	35.6	31.1	26.2	20.4	
-25	102	101	99.7	98.2	96.1	93.5	90.4	86.7	82.4	77.5	72.1	66.2	60.1	50.9	40.4	31.0	24.6	18.2	
-20	108	107	105	103	101	98.1	94.5	90.4	85.6	80.3	74.4	68.1	61.5	54.9	45.2	30.9	22.9	16.1	
-15	112	110	109	107	104	101	97.0	92.6	87.6	82.0	75.9	69.4	62.6	55.7	47.3	36.9	25.2	12.8	
-10	115	114	112	110	107	103	99.4	94.8	89.6	83.8	77.4	70.7	63.6	56.5	49.5	42.9	27.4	9.45	
-5	117	115	113	111	108	105	100	95.7	90.4	84.5	78.0	71.1	64.0	56.7	49.7	42.9	31.9	18.4	
0	118	117	115	112	109	106	101	96.7	91.2	85.2	78.6	71.6	64.3	56.9	49.8	42.9	36.4	27.4	
5	118	117	114	112	109	105	101	96.4	91.0	85.0	78.4	71.4	64.1	56.7	49.6	42.7	36.3	28.7	
10	118	116	114	112	109	105	101	96.2	90.8	84.8	78.2	71.2	63.9	56.5	49.4	42.6	36.1	30.1	
15	115	113	111	109	106	103	99.0	94.4	89.1	83.3	76.9	70.0	62.9	55.7	48.8	42.1	35.8	29.9	
20	112	111	109	107	104	101	97.0	92.6	87.5	81.8	75.5	68.8	61.9	54.9	48.2	41.6	35.5	29.8	
25	106	105	103	102	99.2	96.4	93.1	89.2	84.6	79.4	73.6	67.3	60.6	53.9	47.5	41.2	35.2	29.7	
30	101	99.8	98.2	96.5	94.5	92.1	89.3	85.8	81.8	77.1	71.7	65.7	59.4	53.0	46.8	40.8	35.0	29.6	
35	93.2	92.3	91.1	89.8	88.3	86.4	84.0	81.1	77.6	73.5	68.6	63.2	57.4	51.4	45.5	39.9	34.5	29.4	
40	85.7	84.7	83.9	83.2	82.2	80.8	78.8	76.4	73.4	69.8	65.6	60.7	55.3	49.8	44.3	39.0	34.0	29.3	
45	76.4	75.8	75.4	75.2	74.7	73.9	72.6	70.8	68.5	65.5	62.0	57.7	52.9	47.8	42.8	38.0	33.4	29.0	
50	67.0	66.9	67.0	67.2	67.2	67.0	66.4	65.2	63.5	61.3	58.4	54.7	50.4	45.9	41.3	36.9	32.8	28.7	
55	55.8	56.2	56.9	57.8	58.6	59.4	59.6	59.2	58.3	56.7	54.5	51.5	47.7	43.7	39.8	35.9	32.2	28.6	
60	44.6	45.5	46.9	48.4	50.0	51.7	52.8	53.2	53.0	52.1	50.6	48.2	45.1	41.6	38.2	34.9	31.6	28.5	
65	32.5	33.7	35.6	38.0	40.7	43.1	45.3	46.9	47.7	47.5	46.7	45.0	42.4	39.6	36.8	34.0	31.2	28.5	
70	20.3	21.9	24.4	27.7	31.3	34.6	37.8	40.5	42.3	43.0	42.8	41.7	39.8	37.6	35.3	33.0	30.8	28.5	
75	10.2	11.8	15.0	19.0	23.2	27.2	30.9	34.2	36.8	38.5	39.1	38.4	37.0	35.3	33.6	31.8	30.1	28.3	
80	0.00	1.68	5.58	10.3	15.1	19.8	24.0	27.9	31.3	34.0	35.3	35.1	34.1	33.0	31.9	30.6	29.4	28.1	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-02

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: