

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	512.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	130.1V x 127.1H
	At 50% of Imax	92.6V x 92.1H
	At 90% of Imax	40.2V x 40.0H

Beam Flux	Total	997.0 lumens per klm.
	To 10% of Imax	983.3 lumens per klm.
	To 50% of Imax	738.2 lumens per klm.
	To 90% of Imax	179.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.0DEG
Operators:QC1
Test Date:2023-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:44%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.2578A P:6.187W PF:1.000 Lamp Flux:85.1157x1 lm		
NAME: 8.02.022.0019 LLS-CN-W100-L2-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

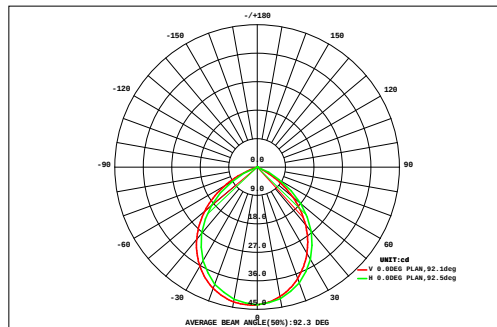

DATA OF LAMP		Eff:13.76lm/W	
MODEL LLS-CN-W100-L2-DMX		Imax(cd)	43.65
NOMINAL POWER(W)	7	AVAILABILITY(%)	98.9
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	84.16
NOMINAL FLUX(lm)	85.1157	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	85.12
TEST VOLTAGE(V)	24.0	θ @50%(H,V)	92,93DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.09	0.09	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.47	0.33
50	0.00	0.00	0.00	0.01	0.07	0.18	0.29	0.36	0.39	0.37	0.30	0.19	0.08	0.02	0.00	0.00	0.00	0.00	2.27	2.17
40	0.00	0.00	0.00	0.07	0.23	0.39	0.54	0.64	0.69	0.66	0.58	0.45	0.28	0.10	0.01	0.00	0.00	0.00	4.64	4.59
30	0.00	0.00	0.02	0.16	0.35	0.55	0.73	0.86	0.92	0.90	0.80	0.64	0.44	0.23	0.05	0.00	0.00	0.00	6.68	6.64
20	0.00	0.00	0.05	0.22	0.44	0.68	0.89	1.04	1.11	1.09	0.98	0.80	0.57	0.33	0.11	0.00	0.00	0.00	8.29	8.27
10	0.00	0.00	0.07	0.27	0.51	0.77	1.00	1.16	1.24	1.22	1.10	0.90	0.65	0.39	0.15	0.01	0.00	0.00	9.44	9.42
0	0.00	0.00	0.08	0.29	0.54	0.81	1.05	1.23	1.31	1.29	1.16	0.96	0.70	0.43	0.18	0.01	0.00	0.00	10.0	10.0
-10	0.00	0.00	0.08	0.29	0.55	0.82	1.06	1.23	1.31	1.29	1.17	0.96	0.70	0.43	0.18	0.01	0.00	0.00	10.1	10.0
-20	0.00	0.00	0.07	0.27	0.52	0.78	1.01	1.17	1.25	1.23	1.11	0.91	0.66	0.40	0.16	0.01	0.00	0.00	9.53	9.51
-30	0.00	0.00	0.06	0.23	0.46	0.70	0.91	1.06	1.13	1.10	0.99	0.81	0.57	0.33	0.11	0.00	0.00	0.00	8.45	8.42
-40	0.00	0.00	0.03	0.17	0.37	0.57	0.76	0.89	0.94	0.92	0.82	0.66	0.45	0.24	0.06	0.00	0.00	0.00	6.88	6.85
-50	0.00	0.00	0.01	0.10	0.25	0.42	0.57	0.67	0.71	0.69	0.60	0.46	0.30	0.12	0.01	0.00	0.00	0.00	4.92	4.86
-60	0.00	0.00	0.00	0.03	0.12	0.23	0.34	0.41	0.44	0.42	0.35	0.24	0.11	0.02	0.00	0.00	0.00	0.00	2.71	2.61
-70	0.00	0.00	0.00	0.00	0.01	0.06	0.10	0.13	0.14	0.13	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.72	0.43
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.00	0.47	2.11	4.43	6.99	9.29	10.9	11.7	11.4	10.1	8.04	5.52	3.04	1.02	0.05	0.00	0.00	85	---
Φ a	0.00	0.00	0.37	2.04	4.37	6.90	9.24	10.9	11.7	11.4	10.0	7.94	5.47	2.96	0.92	0.01	0.00	0.00	---	84


one-half-peak spread: U:47.1,D:46.0 , L:47.1, Beam Type: Type 6 x 7 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.0DEG
Operators:QC1
Test Date:2023-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:44%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.2578A P:6.187W PF:1.000 Lamp Flux:85.1157x1 lm		
NAME: 8.02.022.0019 LLS-CN-W100-L2-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

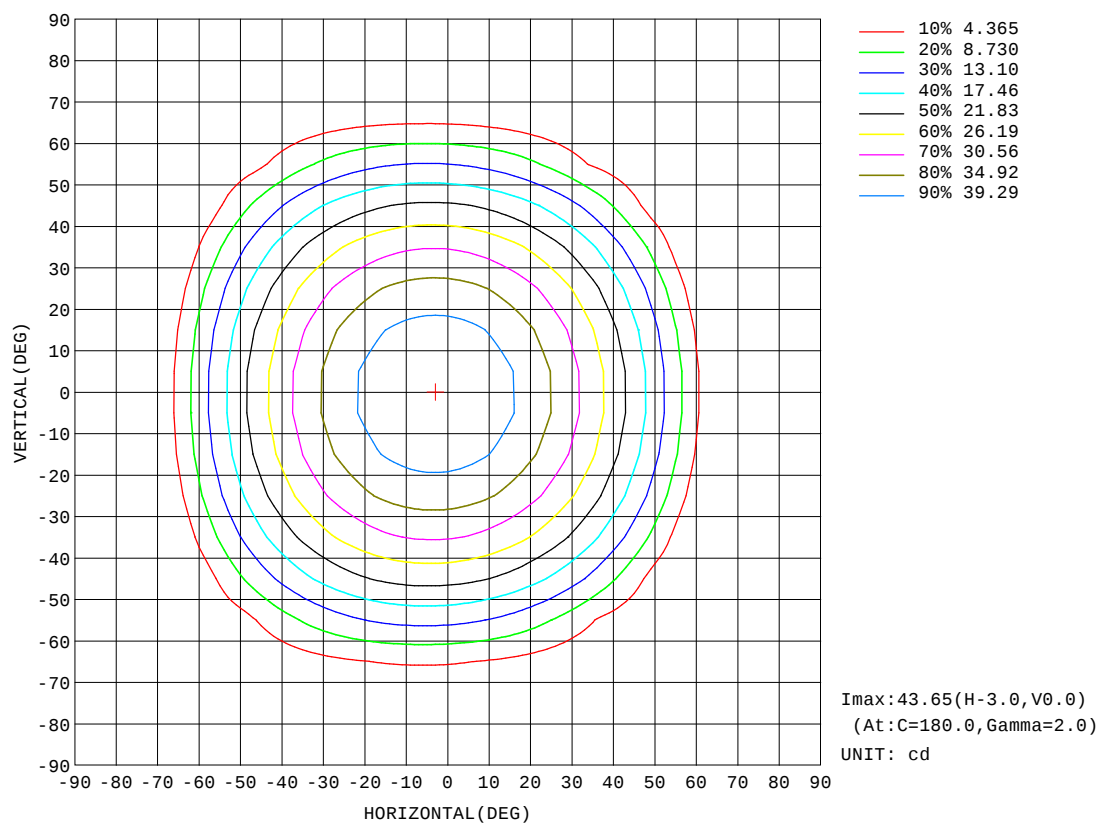


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.0DEG
Operators:QC1
Test Date:2023-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:44%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.2578A P:6.187W PF:1.000 Lamp Flux:85.1157x1 lm		
NAME: 8.02.022.0019 LLS-CN-W100-L2-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

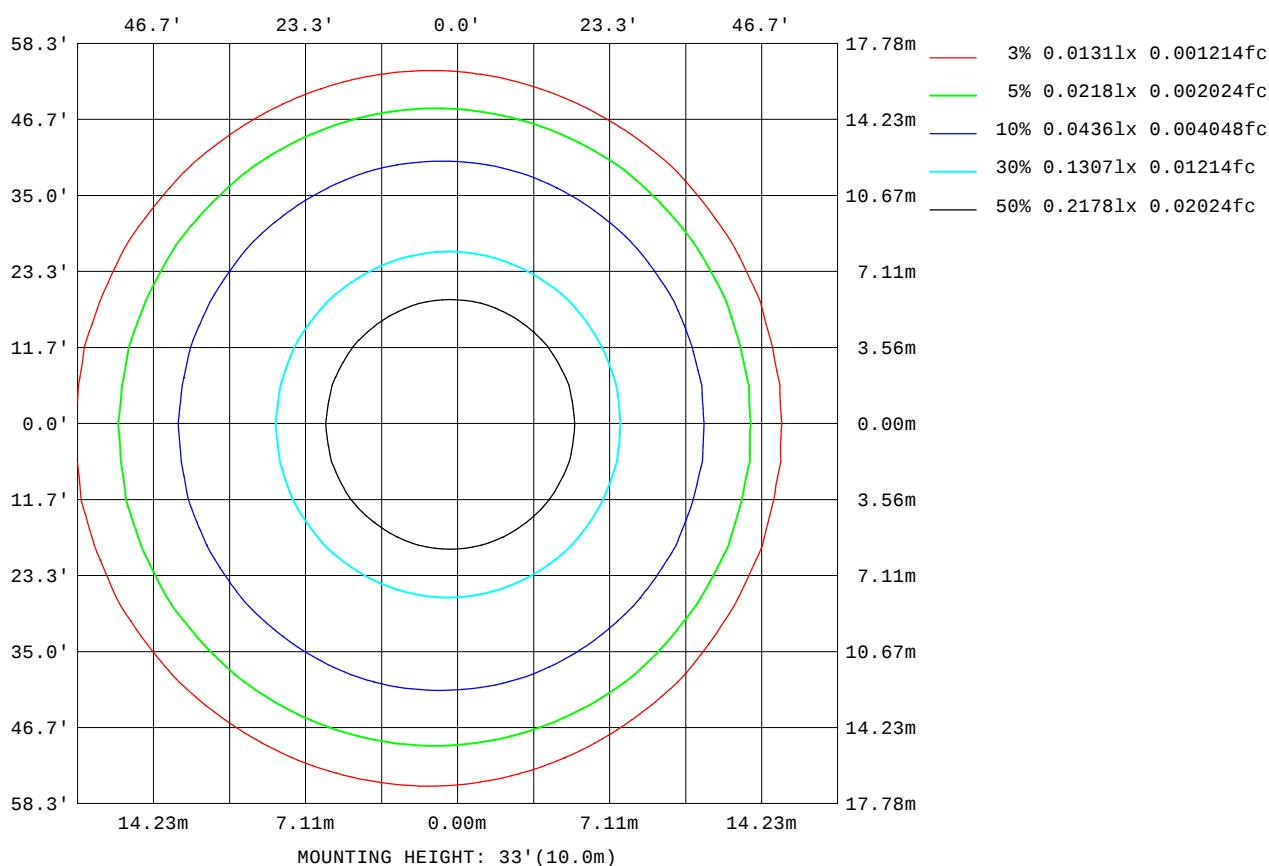


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.0DEG
Operators:QC1
Test Date:2023-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:44%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.2578A P:6.187W PF:1.000 Lamp Flux:85.1157x1 lm		
NAME: 8.02.022.0019 LLS-CN-W100-L2-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:63.27 lm

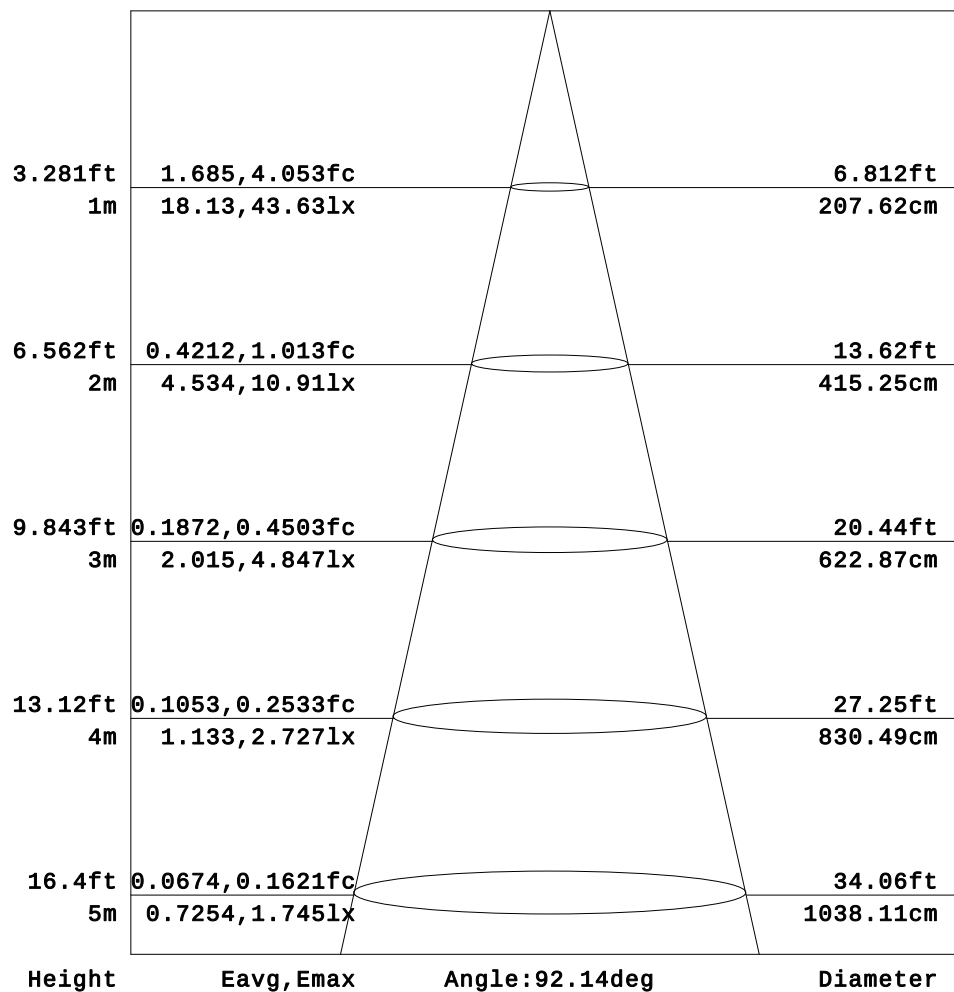


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.0DEG
Operators:QC1
Test Date:2023-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:44%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

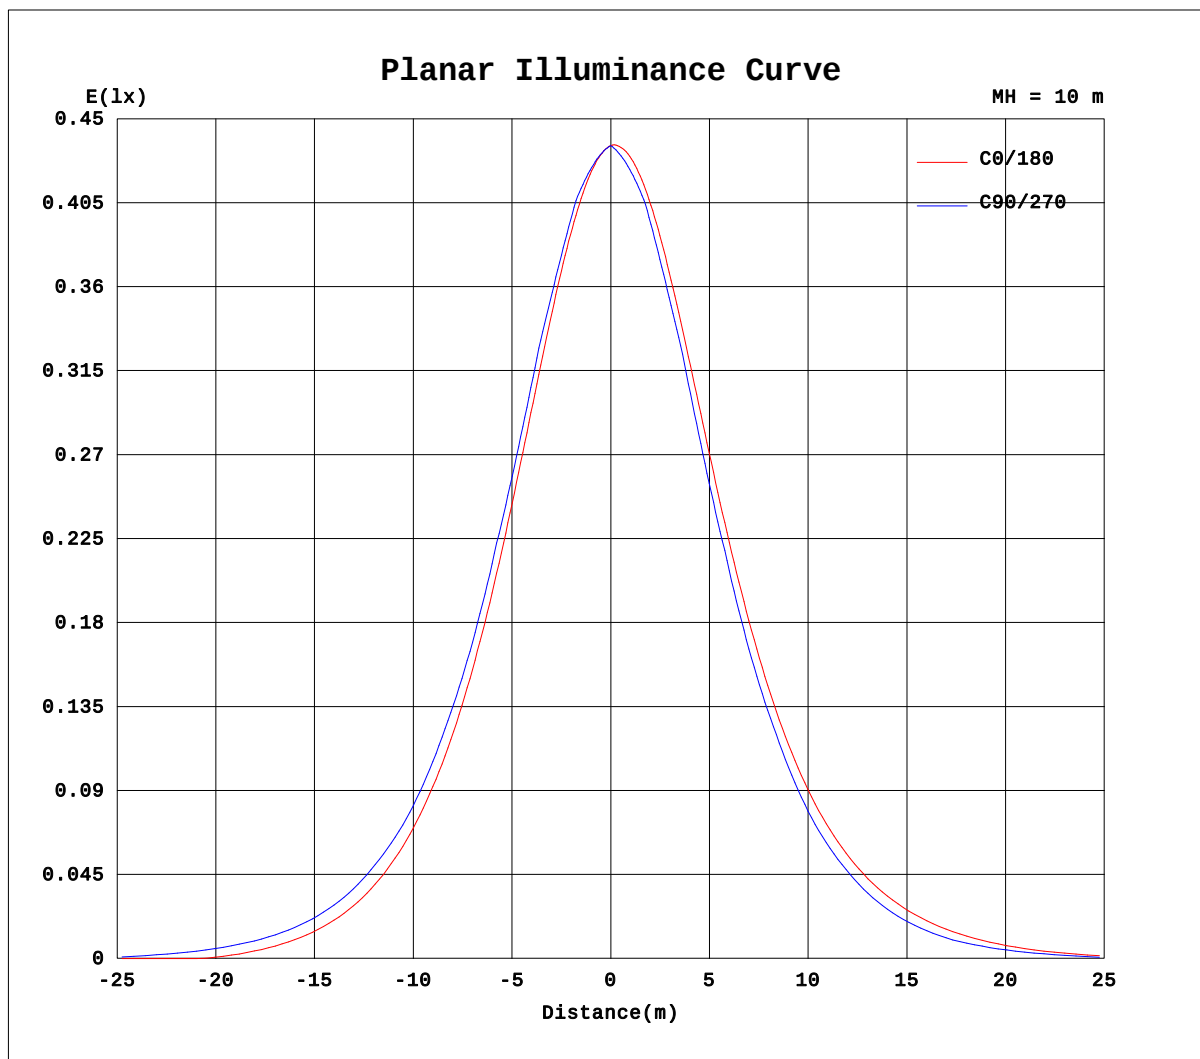

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 30.0DEG
Operators: QC1
Test Date: 2023-08-29

V(β) Range: -80 - 80DEG
V(β) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 44%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2578A P:6.187W PF:1.000 Lamp Flux:85.1157x1 lm		
NAME: 8.02.022.0019 LLS-CN-W100-L2-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	1.72	2.54	3.24	3.82	4.27	4.58	4.74	4.79	4.69
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	1.95	3.78	5.38	6.74	7.85	8.68	9.24	9.53	9.59	9.32
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.29	2.79	4.94	7.11	9.02	10.7	12.0	13.1	13.9	14.3	14.4	14.2
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.14	3.21	6.15	8.84	11.2	13.4	15.2	16.7	17.9	18.7	19.2	19.2	19.0
-45	0.00	0.00	0.00	0.00	0.00	0.00	1.80	5.00	8.28	11.3	14.0	16.4	18.5	20.2	21.6	22.6	23.2	23.4	23.3
-40	0.00	0.00	0.00	0.00	0.00	0.39	4.38	8.16	11.7	14.9	17.8	20.3	22.5	24.3	25.7	26.8	27.4	27.6	27.4
-35	0.00	0.00	0.00	0.00	0.00	1.09	5.19	9.27	13.1	16.6	19.7	22.6	25.0	27.1	28.7	29.9	30.7	31.0	30.9
-30	0.00	0.00	0.00	0.00	0.00	3.11	7.66	12.0	15.9	19.6	22.9	25.8	28.4	30.5	32.2	33.4	34.2	34.4	34.3
-25	0.00	0.00	0.00	0.00	0.00	3.25	8.05	12.6	16.8	20.7	24.2	27.4	30.1	32.4	34.3	35.7	36.6	37.0	36.9
-20	0.00	0.00	0.00	0.00	0.35	5.35	10.3	14.9	19.3	23.3	26.8	30.0	32.8	35.1	37.0	38.3	39.2	39.5	39.4
-15	0.00	0.00	0.00	0.00	0.11	4.83	9.93	14.8	19.3	23.4	27.2	30.6	33.6	36.0	38.1	39.6	40.6	41.1	41.0
-10	0.00	0.00	0.00	0.00	0.98	6.39	11.5	16.4	21.0	25.2	29.0	32.4	35.4	37.9	39.9	41.3	42.3	42.7	42.5
-5	0.00	0.00	0.00	0.00	0.31	5.54	10.8	15.8	20.5	24.8	28.7	32.2	35.3	37.9	40.0	41.6	42.6	43.1	43.1
0	0.00	0.00	0.00	0.00	1.34	6.84	12.1	17.1	21.7	26.0	29.8	33.3	36.3	38.8	40.8	42.3	43.2	43.6	43.5
5	0.00	0.00	0.00	0.00	0.27	5.45	10.7	15.7	20.4	24.7	28.6	32.1	35.2	37.8	39.9	41.5	42.5	43.0	43.0
10	0.00	0.00	0.00	0.00	0.81	6.21	11.4	16.2	20.8	25.0	28.8	32.2	35.2	37.7	39.7	41.1	42.1	42.5	42.3
15	0.00	0.00	0.00	0.00	0.07	4.52	9.61	14.4	18.9	23.1	26.9	30.3	33.2	35.7	37.7	39.3	40.3	40.8	40.7
20	0.00	0.00	0.00	0.00	0.15	4.91	9.82	14.5	18.8	22.8	26.4	29.6	32.4	34.7	36.5	37.9	38.8	39.1	39.0
25	0.00	0.00	0.00	0.00	0.00	2.72	7.48	12.0	16.2	20.1	23.6	26.8	29.5	31.9	33.7	35.1	36.0	36.5	36.4
30	0.00	0.00	0.00	0.00	0.00	2.47	6.98	11.3	15.2	18.9	22.2	25.2	27.7	29.8	31.5	32.8	33.6	33.8	33.7
35	0.00	0.00	0.00	0.00	0.00	0.77	4.43	8.48	12.3	15.8	18.9	21.8	24.2	26.3	27.9	29.2	30.0	30.3	30.2
40	0.00	0.00	0.00	0.00	0.00	0.01	3.53	7.28	10.8	14.0	16.9	19.4	21.6	23.5	24.9	25.9	26.6	26.8	26.7
45	0.00	0.00	0.00	0.00	0.00	0.00	1.38	4.05	7.29	10.3	13.0	15.4	17.5	19.2	20.6	21.6	22.3	22.5	22.4
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.17	5.05	7.72	10.1	12.2	14.1	15.6	16.8	17.6	18.1	18.2	18.0
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	2.25	3.74	5.88	7.78	9.43	10.8	11.9	12.6	13.1	13.2	13.1
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.65	2.44	4.01	5.37	6.48	7.34	7.91	8.22	8.28	8.05
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	1.04	1.86	2.56	3.14	3.59	3.91	4.09	4.14	4.06
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.0DEG
 Operators:QC1
 Test Date:2023-08-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:44%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2578A P:6.187W PF:1.000 Lamp Flux:85.1157x1 lm		
NAME: 8.02.022.0019 LLS-CN-W100-L2-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	4.45	4.07	3.56	2.92	2.15	1.28	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	8.77	7.96	6.89	5.56	3.98	2.18	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	13.7	12.9	11.8	10.4	8.74	6.79	4.61	2.96	1.50	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	18.4	17.5	16.2	14.7	12.8	10.6	8.09	5.35	2.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	22.7	21.8	20.6	18.9	16.9	14.6	12.0	9.10	5.93	2.63	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	26.8	25.7	24.3	22.5	20.3	17.7	14.8	11.6	8.13	4.38	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	30.3	29.4	27.9	26.1	23.9	21.3	18.3	15.0	11.4	7.45	3.31	0.37	0.00	0.00	0.00	0.00	0.00	0.00
-30	33.6	32.5	30.9	28.9	26.5	23.7	20.5	17.0	13.1	8.90	4.46	0.14	0.00	0.00	0.00	0.00	0.00	0.00
-25	36.3	35.3	33.7	31.7	29.3	26.5	23.2	19.6	15.6	11.3	6.76	1.94	0.00	0.00	0.00	0.00	0.00	0.00
-20	38.7	37.5	35.8	33.6	31.0	28.0	24.5	20.7	16.5	12.0	7.17	2.11	0.00	0.00	0.00	0.00	0.00	0.00
-15	40.4	39.3	37.7	35.6	33.0	30.0	26.6	22.7	18.5	14.0	9.13	3.99	0.00	0.00	0.00	0.00	0.00	0.00
-10	41.8	40.6	38.8	36.6	33.9	30.7	27.1	23.2	18.8	14.1	9.07	3.77	0.00	0.00	0.00	0.00	0.00	0.00
-5	42.5	41.4	39.7	37.5	34.9	31.8	28.2	24.3	20.0	15.3	10.3	5.04	0.07	0.00	0.00	0.00	0.00	0.00
0	42.8	41.6	39.8	37.5	34.7	31.5	27.8	23.8	19.3	14.6	9.50	4.16	0.00	0.00	0.00	0.00	0.00	0.00
5	42.4	41.3	39.6	37.4	34.8	31.7	28.2	24.2	19.9	15.2	10.3	4.99	0.07	0.00	0.00	0.00	0.00	0.00
10	41.6	40.4	38.6	36.4	33.7	30.6	27.0	23.0	18.7	14.0	8.96	3.66	0.00	0.00	0.00	0.00	0.00	0.00
15	40.1	39.0	37.4	35.3	32.8	29.8	26.3	22.5	18.3	13.8	8.98	3.86	0.00	0.00	0.00	0.00	0.00	0.00
20	38.3	37.1	35.5	33.3	30.7	27.7	24.2	20.4	16.3	11.8	6.99	1.97	0.00	0.00	0.00	0.00	0.00	0.00
25	35.8	34.8	33.3	31.3	28.9	26.1	22.9	19.3	15.3	11.1	6.54	1.77	0.00	0.00	0.00	0.00	0.00	0.00
30	33.0	31.9	30.4	28.4	26.0	23.3	20.1	16.6	12.8	8.61	4.22	0.05	0.00	0.00	0.00	0.00	0.00	0.00
35	29.7	28.8	27.4	25.6	23.4	20.8	17.9	14.6	11.0	7.15	3.04	0.28	0.00	0.00	0.00	0.00	0.00	0.00
40	26.1	25.1	23.7	21.9	19.7	17.2	14.3	11.2	7.77	4.07	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	21.9	21.0	19.8	18.2	16.3	14.0	11.4	8.55	5.44	2.41	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	17.4	16.5	15.3	13.8	11.9	9.81	7.39	4.70	1.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	12.6	11.8	10.8	9.42	7.79	5.91	3.95	2.63	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.53	6.76	5.72	4.43	2.93	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.83	3.47	2.98	2.36	1.62	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.0DEG
 Operators:QC1
 Test Date:2023-08-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:44%
 Test Distance:8.300m [K=1.0000]
 Remarks: