

LLS-OP-W20A/B




- 1. structure waterproof, IP66/IK10, outdoor to make better reliability;
- 2. seamless splicing design, uniform light, splicing without shadow;
- 3. high quality PMMA diffusion anti UV material, 5 years anti yellowing;
- 4. the lamp body adopts 6063 aluminum, surface oxidation treatment, heat dissipation and anti-corrosion performance is high;
- 5. the control scheme has constant bright and DMX512 protocol, the system is stable and reliable;
- 6. slim size more suitable for narrow slot installation.



Dimension

Unit: mm

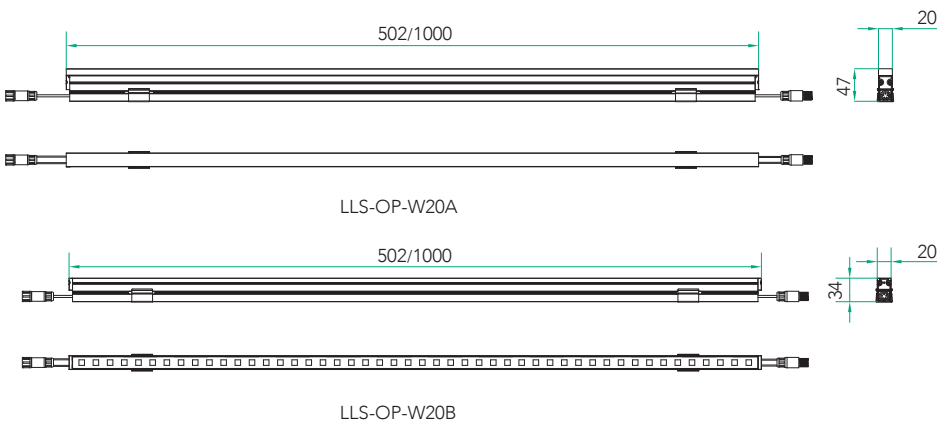

Model Info & Specification

Model	Power	Colors	Lumen	Size	Package
LLS-OP-W20A-L5	6W	RGB W	105 lm 320 lm	L502×W20×H47mm	0.55kg±5%kg 40Units/ctn 103.5×32×22.5cm
LLS-OP-W20A-L6	8W	RGBW W	135 lm 430 lm	L610×W20×H47mm	0.63kg±5%kg 20Units/ctn 125.5×32×22.5cm
LLS-OP-W20A-L10	12W	RGBW W	205 lm 650 lm	L1000×W20×H47mm	0.93±5%kg 20Units/ctn 103.5×32×22.5cm
LLS-OP-W20A-L12	16W	RGBW W	270 lm 865 lm	L1220×W20×H47mm	1.05kg±5%kg 20Units/ctn 125.5×32×22.5cm
LLS-OP-W20B-L5	6W	RGBW W	115 lm 365 lm	L502×W20×H34mm	0.55kg±5%kg 40Units/ctn 103.5×32×22.5cm
LLS-OP-W20A-L6	8W	RGBW W	150 lm 490 lm	L610×W20×H34mm	0.63kg±5%kg 20Units/ctn 125.5×32×22.5cm
LLS-OP-W20B-L10	12W	RGBW W	230 lm 730 lm	L1000×W20×H34mm	0.93±5%kg 20Units/ctn 103.5×32×22.5cm
LLS-OP-W20B-L12	16W	RGBW W	305 lm 975 lm	L1220×W20×H34mm	1.05kg±5%kg 20Units/ctn 125.5×32×22.5cm

Installation instruction

