

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	369.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	123.5V x 165.1H
	At 50% of Imax	92.6V x 134.7H
	At 90% of Imax	46.2V x 89.5H

Beam Flux	Total	997.3 lumens per klm.
	To 10% of Imax	988.0 lumens per klm.
	To 50% of Imax	827.6 lumens per klm.
	To 90% of Imax	250.5 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.5905A P:14.17W PF:1.000 Lamp Flux:63.5727x1 lm		
NAME: 8.02.040.0005 (亚克力罩) LLS-OP-W20A-L10-DMX TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:202408018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

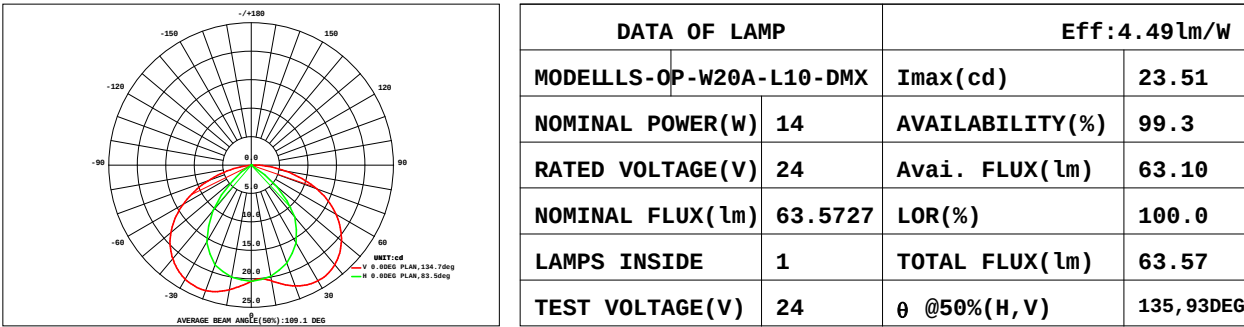


AREA FLUX DIAGRAM																		UNIT: lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.05	0.03	0.01	0.21	0.16
70	0.00	0.01	0.03	0.05	0.06	0.05	0.04	0.02	0.00	0.00	0.03	0.06	0.11	0.14	0.12	0.08	0.03	0.01	0.85	0.76
60	0.00	0.02	0.07	0.13	0.18	0.21	0.19	0.13	0.08	0.08	0.16	0.24	0.27	0.24	0.19	0.11	0.04	0.01	2.34	2.30
50	0.00	0.03	0.09	0.19	0.28	0.34	0.37	0.35	0.29	0.29	0.35	0.40	0.39	0.33	0.23	0.13	0.05	0.01	4.12	4.12
40	0.00	0.03	0.12	0.23	0.35	0.45	0.50	0.50	0.45	0.43	0.48	0.51	0.47	0.38	0.27	0.16	0.06	0.01	5.41	5.41
30	0.00	0.04	0.13	0.26	0.39	0.51	0.57	0.59	0.55	0.52	0.56	0.57	0.52	0.43	0.30	0.17	0.07	0.01	6.19	6.19
20	0.00	0.04	0.14	0.28	0.42	0.54	0.62	0.64	0.61	0.58	0.61	0.61	0.56	0.45	0.32	0.18	0.07	0.01	6.69	6.69
10	0.00	0.04	0.14	0.29	0.43	0.56	0.64	0.67	0.64	0.61	0.63	0.64	0.58	0.47	0.33	0.19	0.07	0.01	6.95	6.95
0	0.00	0.04	0.14	0.28	0.43	0.56	0.64	0.67	0.64	0.61	0.63	0.64	0.58	0.47	0.33	0.19	0.08	0.01	6.95	6.95
-10	0.00	0.03	0.13	0.27	0.42	0.54	0.62	0.65	0.62	0.58	0.61	0.62	0.57	0.46	0.33	0.19	0.07	0.01	6.71	6.70
-20	0.00	0.02	0.11	0.24	0.38	0.50	0.58	0.60	0.56	0.52	0.55	0.57	0.53	0.44	0.31	0.18	0.06	0.00	6.14	6.13
-30	0.00	0.00	0.08	0.20	0.33	0.43	0.49	0.49	0.44	0.40	0.44	0.47	0.45	0.38	0.28	0.16	0.03	0.00	5.09	5.08
-40	0.00	0.00	0.04	0.16	0.26	0.33	0.35	0.32	0.26	0.23	0.28	0.33	0.34	0.30	0.23	0.12	0.02	0.00	3.56	3.55
-50	0.00	0.00	0.01	0.09	0.16	0.19	0.18	0.13	0.08	0.06	0.10	0.17	0.21	0.21	0.17	0.07	0.02	0.00	1.83	1.75
-60	0.00	0.00	0.00	0.03	0.05	0.05	0.03	0.01	0.00	0.00	0.00	0.03	0.07	0.10	0.09	0.03	0.01	0.00	0.50	0.37
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.00	0.00	0.00	0.04	0.01
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.01	0.30	1.24	2.71	4.14	5.25	5.83	5.75	5.21	4.91	5.44	5.85	5.65	4.85	3.59	2.04	0.73	0.09	64	---
Φ a	0.00	0.27	1.21	2.67	4.11	5.23	5.80	5.71	5.19	4.88	5.40	5.82	5.61	4.83	3.56	2.02	0.71	0.07	---	63

one-half-peak spread: U:45.7,D:47.3 , L:42.0,NEC Beam Type: Type 7 x 6 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-08-05	Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.5905A P:14.17W PF:1.000 Lamp Flux:63.5727x1 lm		
NAME: 8.02.040.0005 (亚克力罩) LLS-OP-W20A-L10-DTYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:202408018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

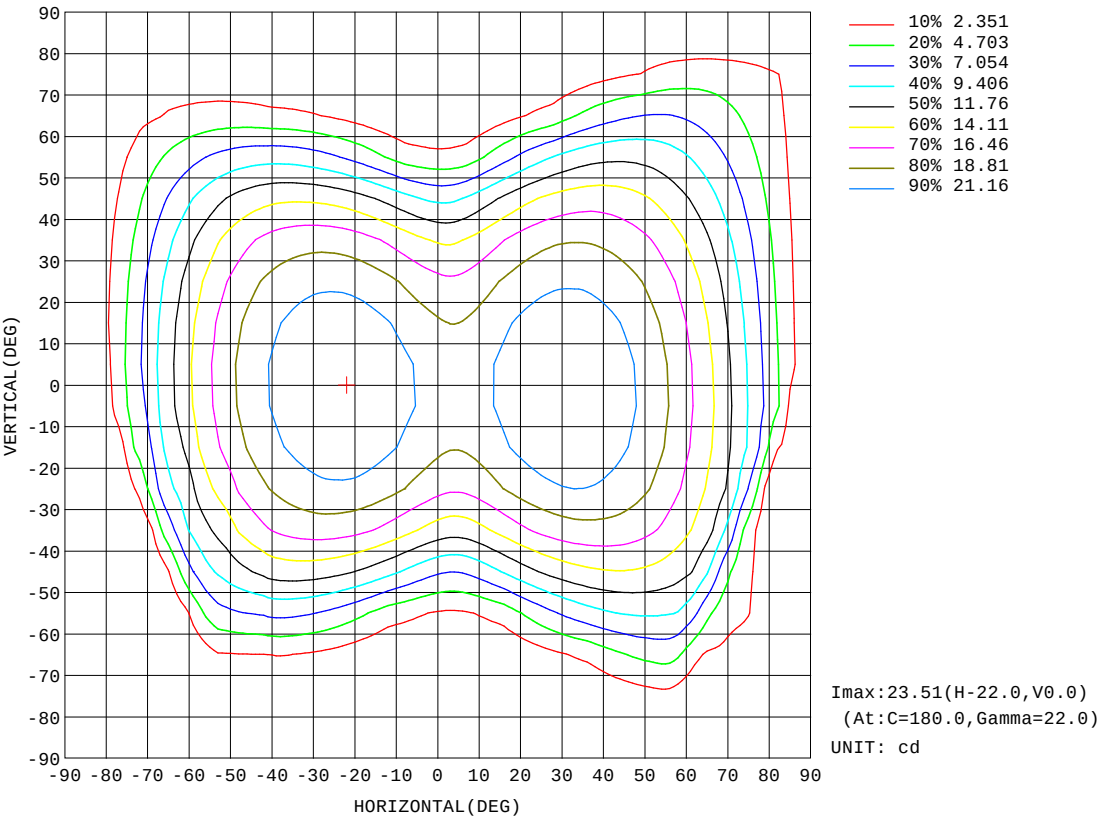


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.5905A P:14.17W PF:1.000 Lamp Flux:63.5727x1 lm		
NAME: 8.02.040.0005 (亚克力罩) LLS-OP-W20A-L10-DTYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:202408018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

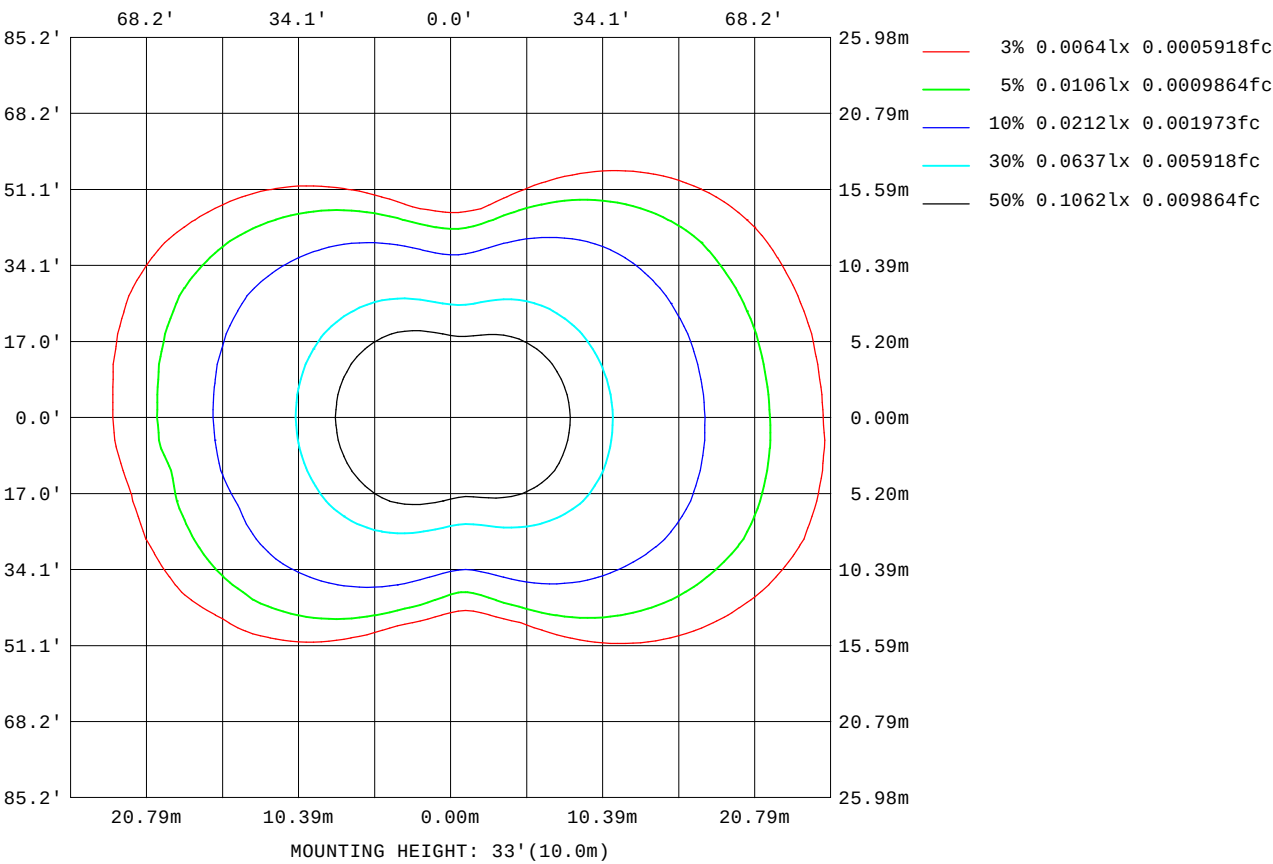


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.5905A P:14.17W PF:1.000 Lamp Flux:63.5727x1 lm		
NAME: 8.02.040.0005 (亚克力罩) LLS-OP-W20A-L10-DTYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:202408018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

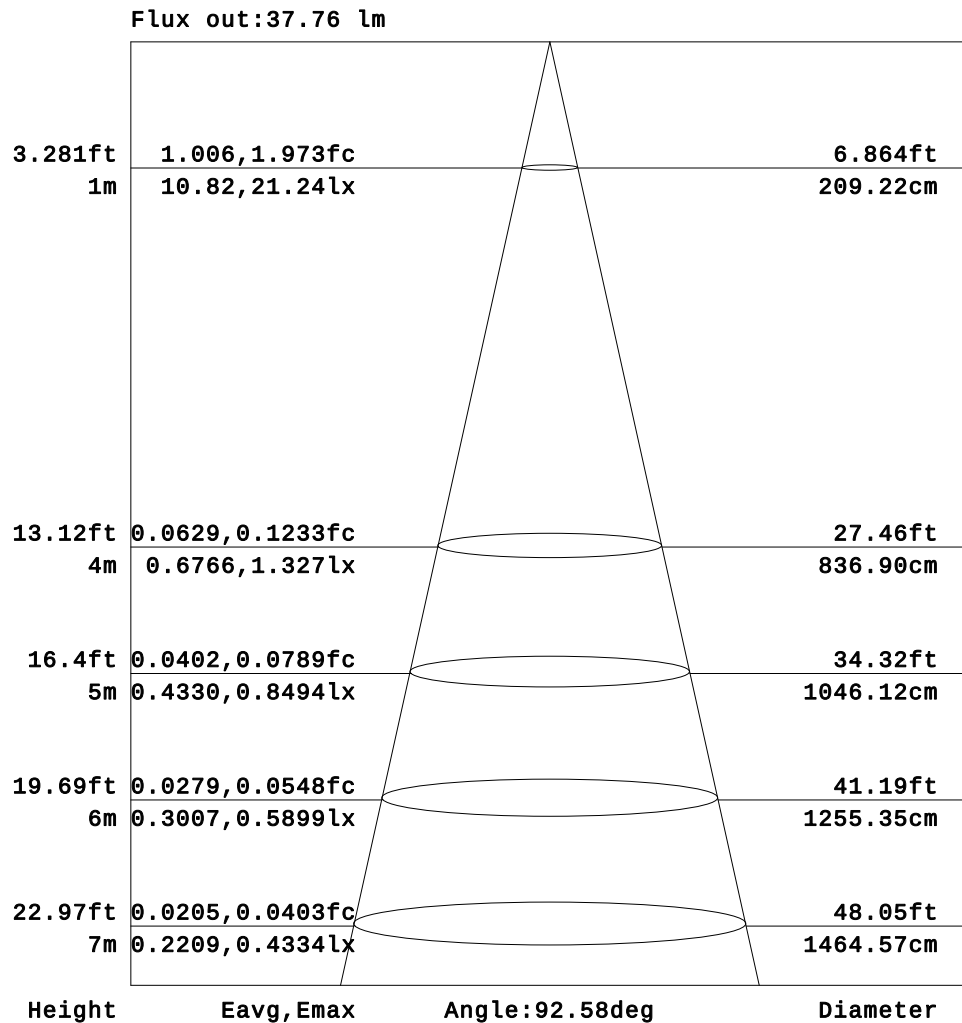


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

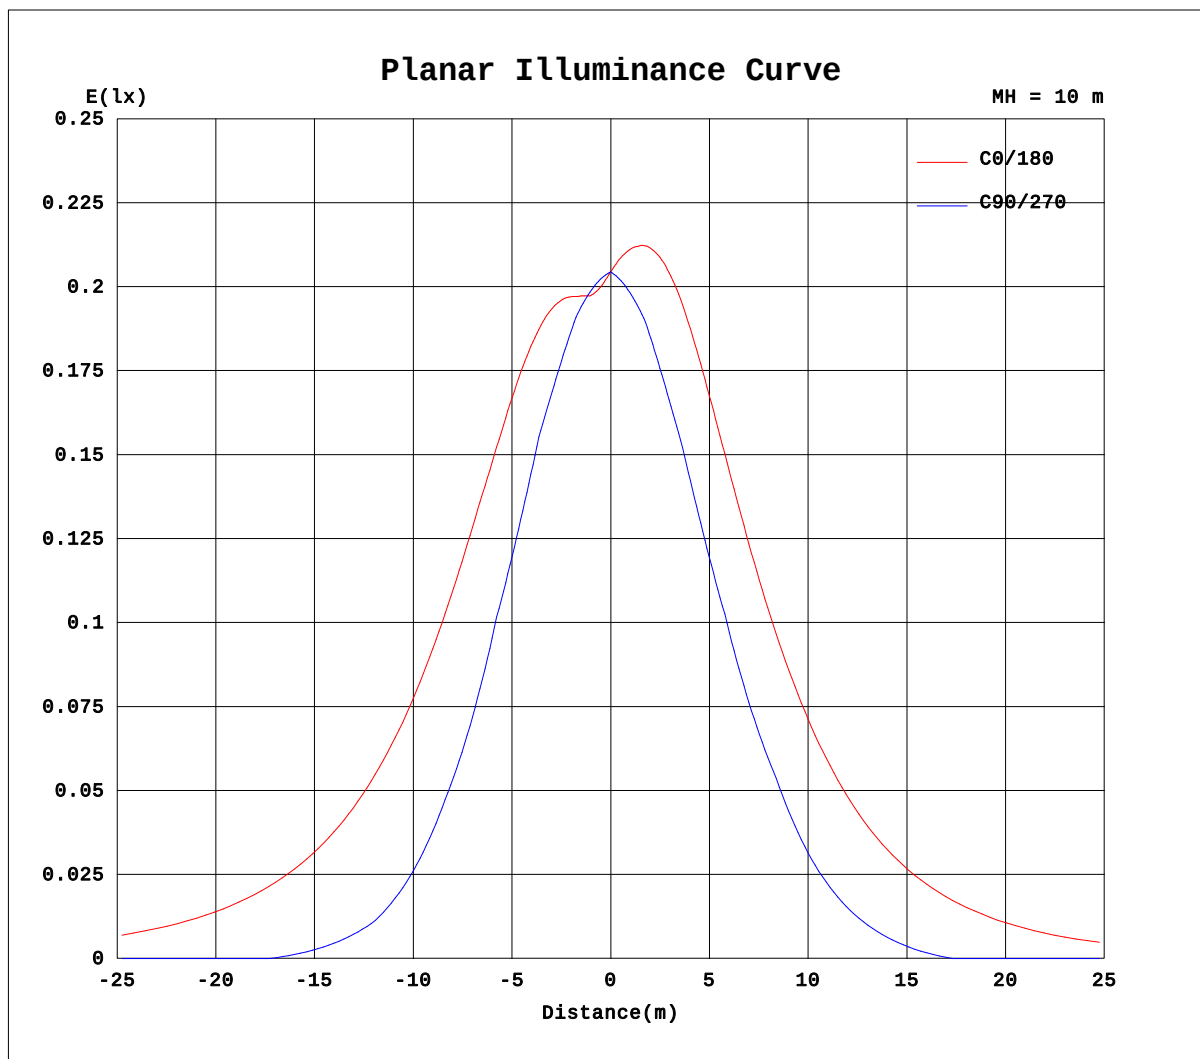

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-05

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.5905A P:14.17W PF:1.000 Lamp Flux:63.5727x1 lm		
NAME: 8.02.040.0005 (亚克力罩) LLS-OP-W20A-L10-DTYPE:LED		WEIGHT:
DIM.:		SERIAL No.:202408018
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.21	1.66	2.24	2.31	2.38	2.34	2.05	1.61	1.04	0.42	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.42	3.33	4.48	4.61	4.76	4.68	4.09	3.22	2.08	0.83	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.22	2.40	5.50	6.68	7.13	7.60	7.56	7.14	6.40	5.41	4.28	3.26	2.64	2.14	
-50	0.00	0.00	0.00	0.00	0.00	0.44	4.39	7.67	8.88	9.66	10.4	10.4	10.2	9.57	8.75	7.72	6.52	5.28	4.29	
-45	0.00	0.00	0.00	0.00	0.00	2.20	6.47	9.05	10.5	11.7	12.7	13.0	12.9	12.4	11.7	10.8	9.64	8.42	7.40	
-40	0.00	0.00	0.00	0.00	0.00	3.97	8.54	10.4	12.2	13.8	15.0	15.5	15.6	15.3	14.7	13.9	12.8	11.6	10.5	
-35	0.00	0.00	0.00	0.00	1.44	6.00	9.46	11.6	13.4	15.2	16.5	17.2	17.5	17.5	17.1	16.4	15.3	14.1	13.1	
-30	0.00	0.00	0.00	0.00	2.88	8.03	10.4	12.7	14.5	16.7	18.0	18.9	19.5	19.7	19.5	18.8	17.9	16.7	15.7	
-25	0.00	0.00	0.00	1.03	4.67	8.76	10.9	13.8	15.7	17.7	19.0	19.9	20.5	20.8	20.7	20.1	19.2	18.2	17.2	
-20	0.00	0.00	0.00	2.06	6.47	9.49	11.5	14.9	16.9	18.6	19.9	20.9	21.6	21.9	21.9	21.4	20.6	19.6	18.7	
-15	0.00	0.00	0.66	3.17	6.56	10.1	12.5	15.4	17.5	19.2	20.5	21.5	22.2	22.5	22.5	22.0	21.2	20.3	19.4	
-10	0.00	0.00	1.32	4.28	6.65	10.7	13.5	16.0	18.0	19.8	21.1	22.1	22.8	23.1	23.0	22.6	21.8	20.9	20.0	
-5	0.00	0.00	1.45	4.64	7.36	10.9	13.7	16.1	18.2	20.0	21.3	22.3	23.0	23.3	23.2	22.8	22.0	21.1	20.2	
0	0.00	0.00	1.58	5.00	8.06	11.1	13.9	16.3	18.4	20.2	21.5	22.5	23.2	23.5	23.5	23.0	22.2	21.3	20.4	
5	0.00	0.00	1.83	4.96	8.02	11.0	13.8	16.3	18.4	20.1	21.4	22.3	23.0	23.3	23.2	22.7	21.9	21.0	20.1	
10	0.00	0.00	2.08	4.92	7.97	11.0	13.7	16.2	18.3	19.9	21.2	22.2	22.9	23.1	23.0	22.5	21.6	20.7	19.8	
15	0.00	0.05	2.06	4.84	7.84	10.8	13.5	15.8	17.9	19.5	20.7	21.6	22.2	22.5	22.3	21.8	20.9	19.9	19.1	
20	0.00	0.10	2.04	4.76	7.70	10.6	13.2	15.5	17.4	19.1	20.2	21.1	21.6	21.8	21.6	21.1	20.2	19.2	18.3	
25	0.00	0.13	1.87	4.54	7.33	10.1	12.6	14.8	16.7	18.3	19.4	20.2	20.6	20.7	20.5	19.8	18.9	17.9	17.1	
30	0.00	0.15	1.70	4.32	6.95	9.59	12.0	14.2	16.0	17.5	18.5	19.2	19.7	19.7	19.3	18.6	17.7	16.6	15.8	
35	0.00	0.08	1.62	4.00	6.42	8.88	11.2	13.2	14.9	16.2	17.2	17.7	18.0	17.9	17.5	16.7	15.7	14.6	13.9	
40	0.00	0.00	1.54	3.68	5.90	8.17	10.3	12.2	13.8	15.0	15.8	16.2	16.3	16.2	15.6	14.8	13.7	12.6	11.9	
45	0.00	0.00	1.49	3.28	5.23	7.21	9.08	10.7	12.0	13.0	13.6	13.8	13.7	13.3	12.7	11.7	10.6	9.55	8.91	
50	0.00	0.00	1.43	2.88	4.55	6.25	7.83	9.19	10.2	10.9	11.3	11.3	11.0	10.5	9.73	8.71	7.55	6.47	5.88	
55	0.00	0.00	1.29	2.34	3.75	5.05	6.22	7.22	7.94	8.40	8.60	8.45	8.00	7.29	6.36	5.25	4.04	3.24	2.94	
60	0.00	0.00	1.15	1.80	2.96	3.84	4.61	5.24	5.65	5.86	5.88	5.57	4.96	4.08	3.00	1.78	0.53	0.00	0.00	
65	0.00	0.00	0.72	1.45	2.01	2.59	2.97	3.23	3.32	3.22	2.94	2.78	2.48	2.04	1.50	0.89	0.26	0.00	0.00	
70	0.00	0.00	0.28	1.11	1.06	1.34	1.34	1.22	0.98	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.14	0.55	0.53	0.67	0.67	0.61	0.49	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.5905A P:14.17W PF:1.000 Lamp Flux:63.5727x1 lm																	
NAME: 8.02.040.0005 (亚克力罩) LLS-OP-W20A-L10-DTYPE:LED															WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:202408018		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--2																	
UNIT: cd																	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	1.02	1.46	1.73	0.87	0.48	0.31	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.92	2.04	2.92	3.47	1.74	0.97	0.62	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.71	1.48	2.17	2.76	3.69	4.60	5.26	5.58	3.99	2.09	1.67	1.06	0.12	0.00
-60	0.00	0.00	0.00	1.42	2.95	4.34	5.51	6.46	7.17	7.60	7.69	6.24	3.22	2.72	2.13	0.24	0.00
-55	2.05	2.51	3.21	4.64	6.06	7.29	8.29	9.05	9.53	9.71	9.60	8.51	5.29	3.26	2.45	0.65	0.00
-50	4.11	5.02	6.42	7.86	9.17	10.2	11.1	11.6	11.9	11.8	11.5	10.8	7.37	3.80	2.77	1.05	0.00
-45	7.14	7.99	9.34	10.7	11.9	12.9	13.5	13.9	14.0	13.7	13.2	12.2	9.64	5.15	2.63	1.03	0.00
-40	10.2	11.0	12.3	13.5	14.6	15.5	16.0	16.2	16.1	15.7	14.8	13.6	11.9	6.50	2.49	1.00	0.00
-35	12.7	13.5	14.7	15.9	17.0	17.7	18.0	18.0	17.7	17.0	15.9	14.5	12.7	8.79	3.71	0.50	0.00
-30	15.3	16.0	17.2	18.3	19.3	19.9	20.1	19.9	19.3	18.4	17.0	15.4	13.4	11.1	4.93	0.00	0.00
-25	16.8	17.5	18.6	19.7	20.6	21.1	21.2	20.8	20.2	19.1	17.7	15.9	13.9	11.5	6.95	1.26	0.00
-20	18.3	19.0	20.1	21.1	21.9	22.2	22.2	21.8	21.0	19.9	18.3	16.5	14.4	11.9	8.97	2.53	0.00
-15	19.0	19.6	20.7	21.7	22.4	22.7	22.7	22.2	21.4	20.2	18.7	16.8	14.6	12.1	9.16	4.40	0.28
-10	19.6	20.3	21.3	22.3	22.9	23.2	23.1	22.6	21.7	20.6	19.0	17.1	14.9	12.3	9.35	6.27	0.57
-5	19.8	20.4	21.5	22.4	23.1	23.3	23.2	22.7	21.8	20.6	19.1	17.1	14.9	12.3	9.30	6.22	1.86
0	20.0	20.6	21.7	22.6	23.2	23.5	23.4	22.8	21.9	20.7	19.1	17.2	14.9	12.3	9.25	6.16	3.16
5	19.8	20.4	21.5	22.4	23.0	23.2	23.1	22.6	21.7	20.5	18.9	17.0	14.8	12.1	9.14	6.07	3.08
10	19.5	20.2	21.3	22.2	22.8	23.0	22.9	22.4	21.5	20.3	18.8	16.9	14.6	12.0	9.03	5.99	3.00
15	18.8	19.5	20.6	21.5	22.2	22.4	22.3	21.8	21.0	19.8	18.3	16.4	14.2	11.7	8.77	5.81	2.91
20	18.1	18.8	19.9	20.8	21.5	21.8	21.8	21.3	20.5	19.4	17.9	16.0	13.8	11.3	8.51	5.64	2.82
25	16.9	17.7	18.9	19.8	20.6	20.9	20.9	20.4	19.7	18.6	17.2	15.4	13.3	10.9	8.22	5.46	2.76
30	15.8	16.6	17.8	18.8	19.6	20.0	19.9	19.6	18.9	17.9	16.6	14.8	12.8	10.5	7.93	5.27	2.69
35	13.9	14.9	16.2	17.3	18.1	18.6	18.7	18.4	17.8	16.8	15.5	13.9	12.1	9.84	7.43	4.97	2.56
40	12.1	13.2	14.6	15.8	16.7	17.2	17.4	17.2	16.6	15.7	14.5	13.0	11.3	9.18	6.94	4.67	2.43
45	9.22	10.4	11.9	13.2	14.3	15.0	15.4	15.4	15.1	14.3	13.3	11.9	10.3	8.45	6.42	4.36	2.33
50	6.34	7.63	9.16	10.6	11.8	12.8	13.4	13.7	13.5	12.9	12.0	10.8	9.40	7.71	5.91	4.06	2.22
55	3.17	4.33	5.93	7.46	8.80	9.90	10.7	11.2	11.3	11.1	10.5	9.57	8.32	6.88	5.33	3.74	2.13
60	0.00	1.03	2.70	4.33	5.76	7.00	8.01	8.73	9.16	9.28	9.07	8.30	7.25	6.05	4.76	3.42	2.05
65	0.00	0.51	1.35	2.16	2.88	3.86	5.06	5.99	6.69	7.08	7.15	6.78	6.13	5.25	4.24	3.16	2.03
70	0.00	0.00	0.00	0.00	0.00	0.72	2.11	3.26	4.21	4.89	5.23	5.26	5.00	4.45	3.73	2.91	2.02
75	0.00	0.00	0.00	0.00	0.00	0.36	1.05	1.63	2.11	2.55	3.20	3.59	3.72	3.55	3.18	2.64	1.99
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	1.16	1.92	2.44	2.65	2.62	2.36	1.97
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: