

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	613.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	136.3V x 97.4H
	At 50% of Imax	81.9V x 72.0H
	At 90% of Imax	56.2V x 49.2H

Beam Flux	Total	997.9 lumens per klm.
	To 10% of Imax	979.6 lumens per klm.
	To 50% of Imax	726.9 lumens per klm.
	To 90% of Imax	380.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.6292A P:15.10W PF:1.000 Lamp Flux:348.487x1 lm		
NAME: 8.02.040.0006(玻璃面板) LLS-OP-W20B-L10-DMXTYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:202408019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

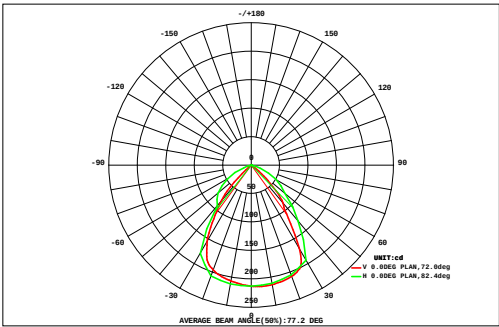

DATA OF LAMP		Eff:23.08lm/W	
MODELLS-OP-W20B-L10-DMX	Imax(cd)	213.9	
NOMINAL POWER(W)	15	AVAILABILITY(%)	98.4
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	342.9
NOMINAL FLUX(lm)	348.487	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	348.5
TEST VOLTAGE(V)	24	θ @50%(H,V)	72,82DEG


AREA FLUX DIAGRAM																	UNIT: lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.20	0.21	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.58	0.00
70	0.00	0.00	0.00	0.00	0.00	0.01	0.23	0.74	0.97	1.01	0.56	0.14	0.00	0.00	0.00	0.00	0.00	3.65	2.84
60	0.00	0.00	0.00	0.00	0.00	0.19	1.04	1.78	1.96	2.01	1.72	0.69	0.10	0.00	0.00	0.00	0.00	9.49	9.09
50	0.00	0.00	0.00	0.00	0.05	0.74	1.97	2.63	2.96	3.04	2.75	1.52	0.52	0.03	0.00	0.00	0.00	16.2	15.9
40	0.00	0.00	0.00	0.00	0.23	1.43	2.96	4.00	4.64	4.75	4.20	2.68	1.22	0.19	0.00	0.00	0.00	26.3	26.1
30	0.00	0.00	0.00	0.00	0.51	2.20	4.15	5.49	6.12	6.25	5.86	4.28	2.08	0.58	0.01	0.00	0.00	37.5	37.3
20	0.00	0.00	0.00	0.01	0.77	2.76	4.78	5.85	6.25	6.34	6.07	5.22	2.66	1.00	0.06	0.00	0.00	41.8	41.6
10	0.00	0.00	0.00	0.02	0.93	2.93	4.99	5.93	6.34	6.45	6.18	5.42	2.95	1.21	0.10	0.00	0.00	43.4	43.3
0	0.00	0.00	0.00	0.02	0.87	2.84	4.92	5.93	6.36	6.47	6.20	5.45	2.96	1.20	0.10	0.00	0.00	43.3	43.1
-10	0.00	0.00	0.00	0.01	0.61	2.50	4.52	5.76	6.26	6.39	6.12	5.17	2.67	0.99	0.06	0.00	0.00	41.1	40.9
-20	0.00	0.00	0.00	0.00	0.32	1.87	3.73	5.09	5.83	5.97	5.56	4.18	1.98	0.57	0.01	0.00	0.00	35.1	34.9
-30	0.00	0.00	0.00	0.00	0.12	1.02	2.62	3.62	4.32	4.33	3.87	2.69	1.14	0.22	0.00	0.00	0.00	23.9	23.7
-40	0.00	0.00	0.00	0.00	0.00	0.51	1.47	2.28	2.38	2.25	2.20	1.62	0.58	0.03	0.00	0.00	0.00	13.3	13.1
-50	0.00	0.00	0.00	0.00	0.00	0.08	0.71	1.61	1.87	1.93	1.78	0.86	0.18	0.00	0.00	0.00	0.00	9.02	8.59
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.54	0.92	0.97	0.75	0.18	0.00	0.00	0.00	0.00	0.00	3.44	2.61
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.12	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL(DEG) 20 30 40 50 60 70 80 90																			
Φ t	0.00	0.00	0.00	0.08	4.41	19.1	38.2	51.4	57.5	58.5	53.9	40.1	19.1	6.01	0.34	0.00	0.00	348	---
Φ a	0.00	0.00	0.00	0.00	3.75	18.7	37.7	50.9	56.9	58.0	53.5	39.6	18.5	5.43	0.00	0.00	0.00	---	343

one-half-peak spread: U:37.8,D:44.4 , L:42.4,NEPA. Beam Type: Type 5 x 7 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-08-05	Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.6292A P:15.10W PF:1.000 Lamp Flux:348.487x1 lm		
NAME: 8.02.040.0006(玻璃面板) LLS-OP-W20B-L10-DM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

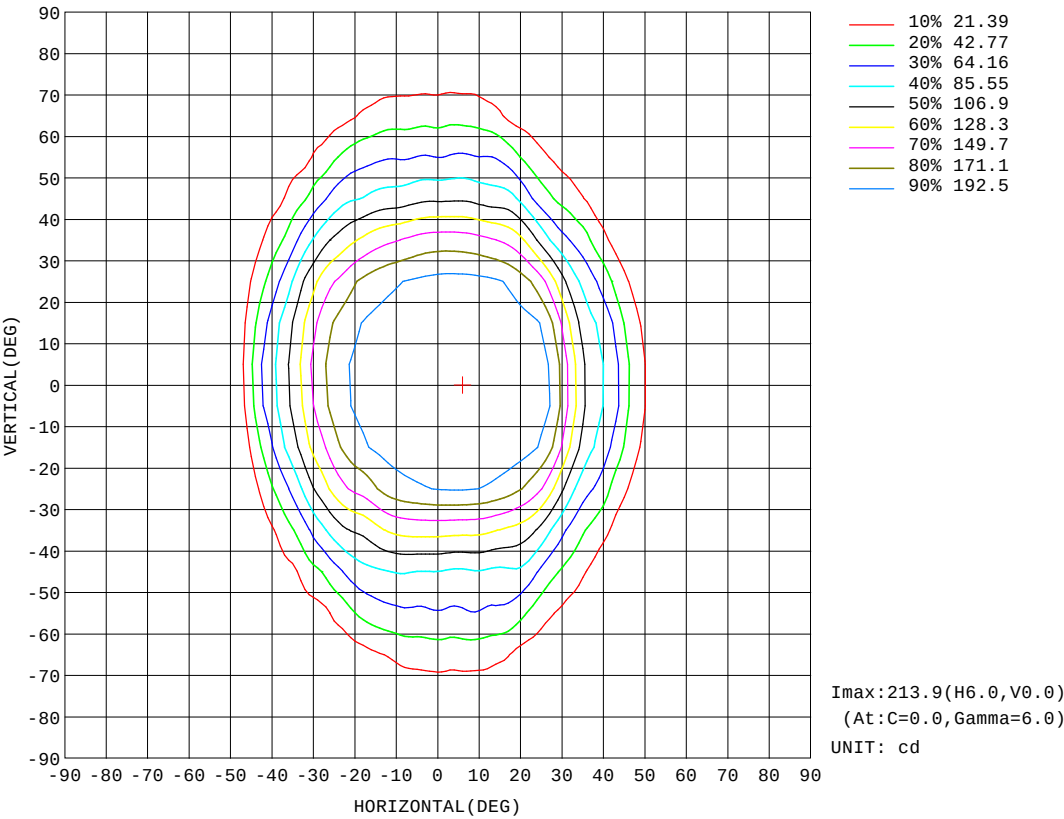


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.6292A P:15.10W PF:1.000 Lamp Flux:348.487x1 lm		
NAME: 8.02.040.0006(玻璃面板) LLS-OP-W20B-L10-DMXYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:202408019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

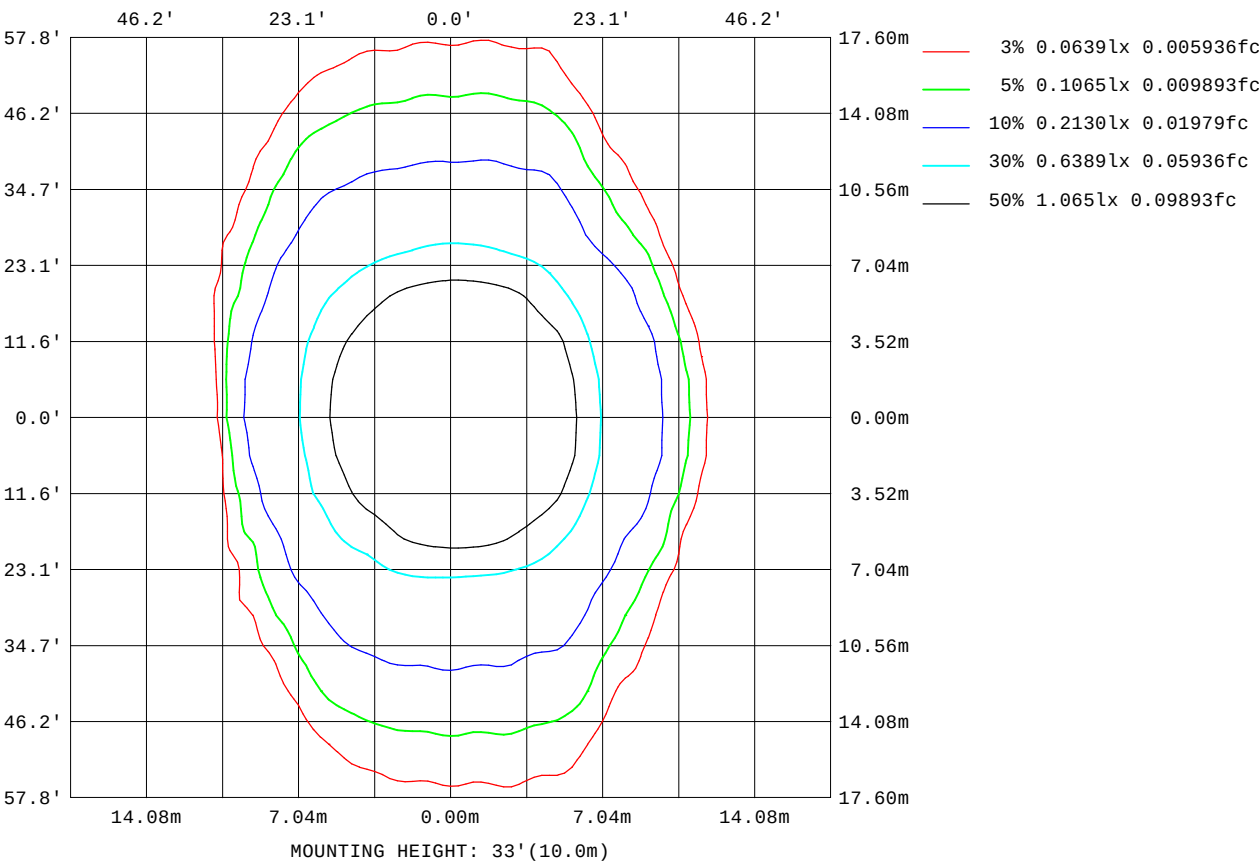


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.6292A P:15.10W PF:1.000 Lamp Flux:348.487x1 lm		
NAME: 8.02.040.0006(玻璃面板) LLS-OP-W20B-L10-DM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

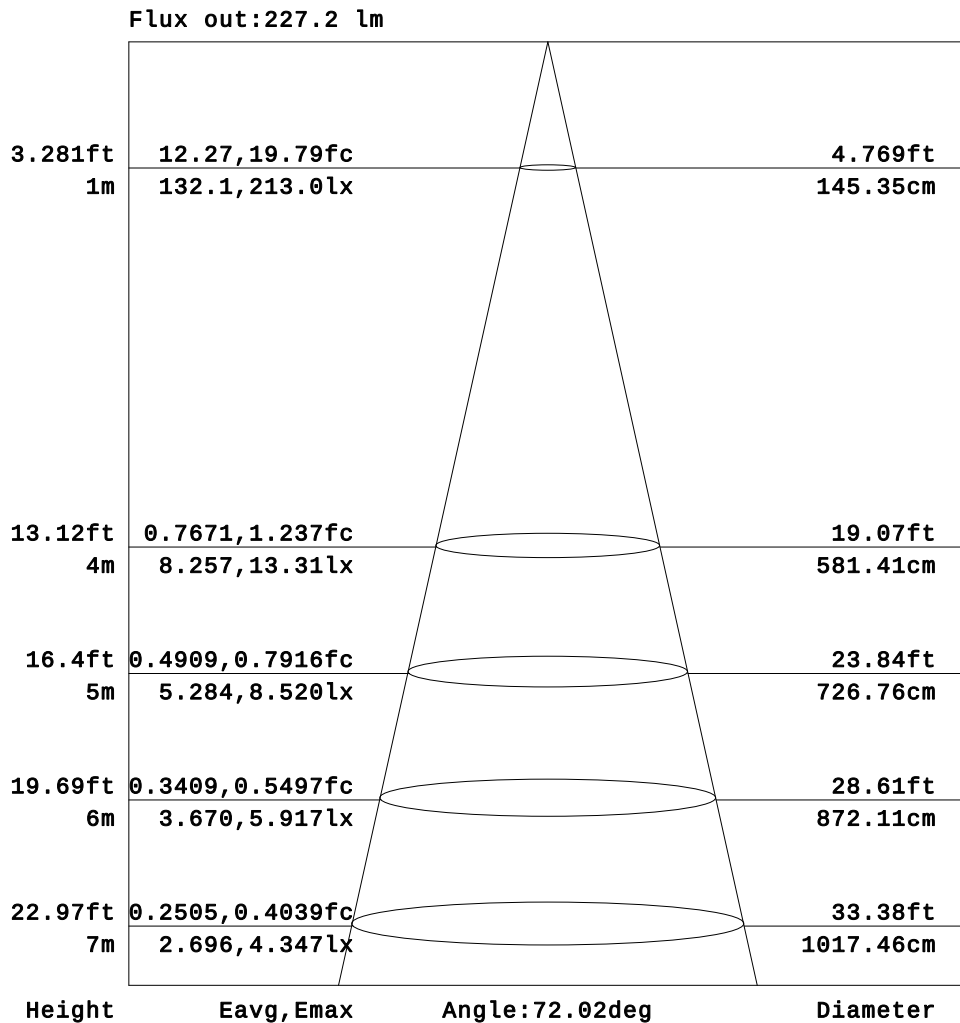


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

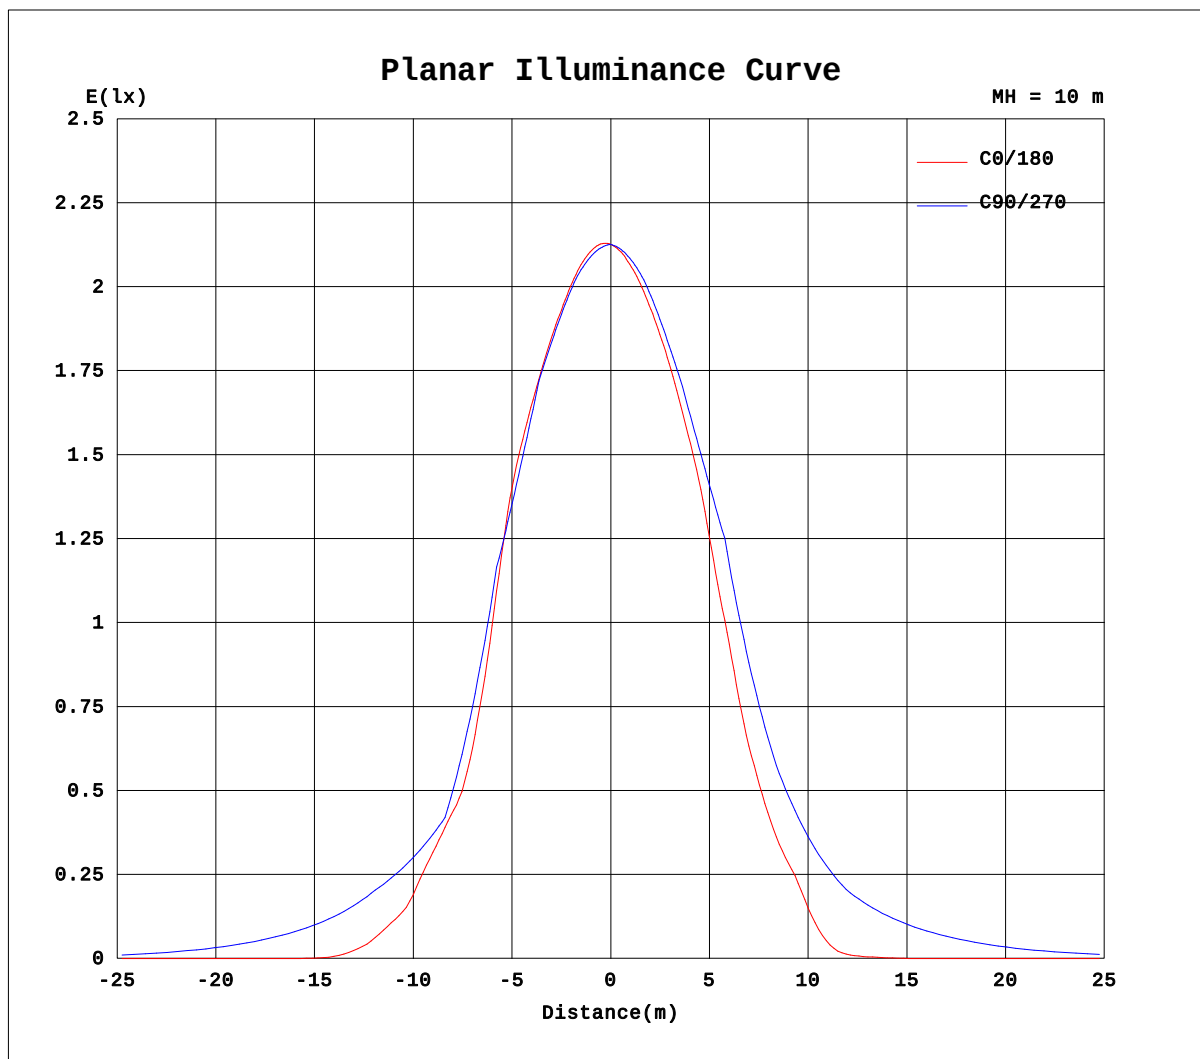

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.6292A P:15.10W PF:1.000 Lamp Flux:348.487x1 lm																	
NAME: 8.02.040.0006(玻璃面板) LLS-OP-W20B-L10-DMKYPE:LED															WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:202408019		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--1		UNIT: cd																	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.97	6.37	7.41
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.95	12.7	14.8
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.49	11.3	18.9	25.7	29.7	31.7
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.98	22.6	37.7	43.4	46.7	48.5
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	11.8	25.4	42.5	54.1	59.4	60.1	62.7
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	23.6	41.8	62.5	70.4	75.4	73.4	77.0
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.54	16.4	37.1	56.2	74.4	82.1	86.5	85.3	85.3
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.08	32.5	50.7	70.5	86.4	93.9	97.6	97.2	93.5
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.12	19.1	41.4	70.0	94.7	109	121	133	137	137
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.23	31.2	50.3	89.3	119	132	148	169	176	180
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.83	11.4	41.1	69.8	106	135	154	169	184	190	193
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.65	18.6	51.0	89.4	123	152	177	190	199	204	207
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	2.78	24.3	62.6	98.2	134	163	185	195	202	206	210
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	3.91	30.0	74.1	107	144	175	193	201	205	209	212
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	4.53	36.4	77.4	111	149	179	195	202	206	209	212
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.16	5.15	42.8	80.6	115	155	184	196	203	207	210	213
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.01	4.99	40.7	79.9	114	154	182	195	202	206	209	212
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.87	4.83	38.6	79.2	113	153	180	194	201	204	208	211
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	3.90	33.7	72.8	107	144	172	189	198	202	205	208
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.97	28.8	66.4	101	135	165	185	195	199	203	205
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.49	22.3	52.0	86.1	122	149	169	183	191	196	199
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	15.8	37.6	70.7	110	133	154	171	182	189	193
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.90	31.7	56.1	86.8	110	127	140	148	156	160
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	25.8	41.5	63.8	87.6	99.4	109	115	124	128
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12.9	30.9	50.9	72.2	84.1	91.9	94.7	101	103
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	20.3	38.0	56.8	68.8	74.3	74.9	78.0
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.1	23.1	39.6	53.8	59.8	62.6	64.6	63.9
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.23	22.3	38.8	45.3	50.2	51.3	50.1
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.11	11.2	19.7	28.5	33.1	34.2	33.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.60	11.7	16.1	17.2	17.6
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	5.84	8.04	8.58	8.79
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.6292A P:15.10W PF:1.000 Lamp Flux:348.487x1 lm		
NAME: 8.02.040.0006(玻璃面板) LLS-OP-W20B-L10-DMKYPE:LED		WEIGHT:
DIM.:		SERIAL No.:202408019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--2																		UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	6.86	6.46	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	13.7	12.9	3.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	30.7	30.5	25.9	13.7	8.30	1.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	47.7	48.1	48.3	27.4	16.6	3.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	60.8	62.9	60.2	49.1	29.2	17.2	6.79	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	73.9	77.7	72.1	70.8	41.9	31.3	13.6	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	81.9	84.5	80.6	81.8	59.6	40.1	23.9	7.23	1.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	89.8	91.3	89.1	92.8	77.3	49.0	34.1	14.3	2.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	135	134	128	119	100	69.2	45.2	27.5	8.69	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	180	177	166	146	123	89.3	56.2	40.7	15.1	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	194	192	186	172	151	110	73.8	53.6	24.7	5.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	209	208	205	199	178	131	91.4	66.5	34.4	9.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	211	210	208	203	189	148	101	75.0	41.9	15.0	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	213	212	211	207	200	165	110	83.5	49.3	20.4	1.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	213	213	211	207	201	167	112	85.3	51.7	22.1	1.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	214	213	211	208	201	169	114	87.1	54.0	23.8	2.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	213	212	210	206	199	165	111	85.5	51.5	21.9	1.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	211	211	209	205	197	161	108	84.0	48.9	20.0	1.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	209	208	205	201	191	147	99.8	77.4	42.4	15.2	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	206	205	202	197	184	133	91.4	70.9	35.9	10.5	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	200	198	194	181	157	114	81.1	55.3	25.9	5.67	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	194	192	185	165	129	94.4	70.8	39.7	15.9	0.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	160	156	148	133	99.1	70.8	52.4	26.8	8.21	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	127	120	111	101	68.9	47.2	34.0	13.9	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	104	98.9	95.1	80.8	53.3	36.4	22.3	6.96	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	80.7	78.2	78.9	60.9	37.7	25.6	10.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	67.0	64.5	60.9	42.4	25.6	13.3	5.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	53.4	50.8	43.0	24.0	13.5	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	35.7	33.0	23.9	12.0	6.77	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	18.1	15.3	4.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	9.03	7.65	2.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: