

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	534.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	145.3V x 102.7H
	At 50% of Imax	89.1V x 79.2H
	At 90% of Imax	59.3V x 52.7H

Beam Flux	Total	998.0 lumens per klm.
	To 10% of Imax	979.8 lumens per klm.
	To 50% of Imax	746.5 lumens per klm.
	To 90% of Imax	361.5 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.2593A P:12.44W PF:1.000 Freq:0Hz Lamp Flux:414.559x1 lm		
NAME: 8.02.040.0009 120° LLS-OP-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

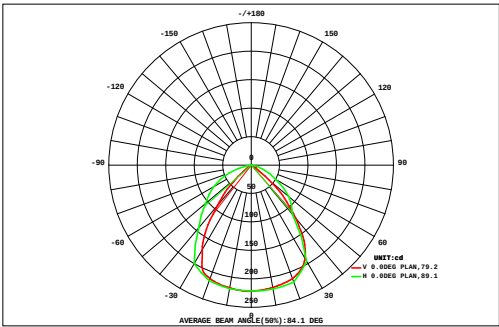

DATA OF LAMP		Eff:33.33lm/W	
MODEL	LLS-OP-W20B-L10-DMX	Imax(cd)	221.6
NOMINAL POWER(W)	12	AVAILABILITY(%)	98.5
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	408.3
NOMINAL FLUX(lm)	414.559	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	414.6
TEST VOLTAGE(V)	48	θ @50%(H,V)	79,89DEG


AREA FLUX DIAGRAM																	UNIT: lm		Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.40	0.64	0.66	0.39	0.08	0.00	0.00	0.00	0.00	0.00	2.27	1.65	
70	0.00	0.00	0.00	0.00	0.00	0.13	0.76	1.60	1.79	1.80	1.59	0.63	0.08	0.00	0.00	0.00	0.00	8.39	7.98	
60	0.00	0.00	0.00	0.00	0.05	0.72	1.96	2.57	2.76	2.77	2.60	1.81	0.53	0.03	0.00	0.00	0.00	15.8	15.5	
50	0.00	0.00	0.00	0.01	0.33	1.57	2.85	3.36	3.68	3.69	3.38	2.80	1.29	0.21	0.00	0.00	0.00	23.2	22.9	
40	0.00	0.00	0.00	0.07	0.79	2.34	3.79	4.60	5.09	5.04	4.39	3.65	1.96	0.57	0.03	0.00	0.00	32.3	32.1	
30	0.00	0.00	0.02	0.17	1.23	3.27	4.88	5.92	6.41	6.38	5.70	4.52	2.69	0.91	0.10	0.01	0.00	42.2	41.9	
VERTICAL (DEG)	0.00	0.00	0.05	0.24	1.64	3.80	5.48	6.26	6.60	6.62	6.30	5.13	3.23	1.17	0.16	0.02	0.00	46.7	46.3	
	0.00	0.00	0.05	0.27	1.80	3.97	5.61	6.32	6.65	6.67	6.35	5.46	3.42	1.29	0.19	0.03	0.00	48.1	47.7	
	0.00	0.00	0.05	0.26	1.74	3.91	5.57	6.32	6.67	6.69	6.36	5.43	3.33	1.23	0.17	0.03	0.00	47.8	47.4	
	0.00	0.00	0.03	0.19	1.43	3.54	5.32	6.21	6.61	6.64	6.26	5.09	3.01	1.02	0.12	0.02	0.00	45.5	45.1	
	0.00	0.00	0.01	0.11	0.97	2.89	4.67	5.77	6.28	6.28	5.66	4.35	2.39	0.69	0.06	0.00	0.00	40.1	39.8	
	0.00	0.00	0.00	0.03	0.47	1.94	3.47	4.46	4.87	4.81	4.21	3.38	1.58	0.32	0.01	0.00	0.00	29.6	29.3	
	0.00	0.00	0.00	0.00	0.13	1.00	2.23	2.77	2.83	2.84	2.84	2.20	0.77	0.06	0.00	0.00	0.00	17.7	17.4	
	0.00	0.00	0.00	0.00	0.00	0.25	1.20	1.90	2.07	2.11	1.93	1.00	0.17	0.00	0.00	0.00	0.00	10.6	10.2	
	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.74	1.03	1.02	0.72	0.12	0.00	0.00	0.00	0.00	0.00	3.84	3.14	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.26	0.23	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.57	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL(DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.00	0.00	0.22	1.35	10.6	29.3	48.1	59.3	64.2	64.3	58.7	45.6	24.5	7.50	0.83	0.10	0.00	0.00	415	---
Φ a	0.00	0.00	0.00	0.36	10.1	29.0	47.6	59.0	63.8	63.8	58.4	45.2	24.0	6.81	0.07	0.00	0.00	0.00	---	408

one-half-peak spread: U:40.9,D:48.7 , L:43.4, Beam Type: Type 6 x 7 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-04-18	Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.2593A P:12.44W PF:1.000 Freq:0Hz Lamp Flux:414.559x1 lm		
NAME: 8.02.040.0009 120° LLS-0P-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

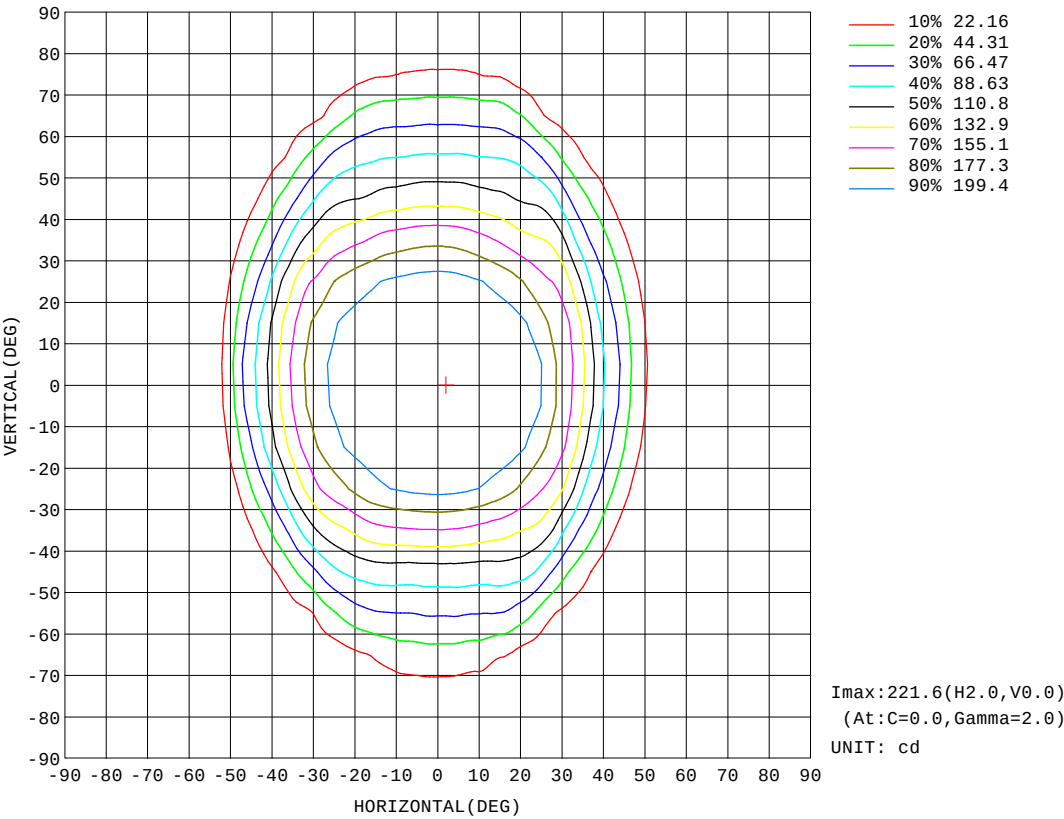


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:48.00V I:0.2593A P:12.44W PF:1.000 Freq:0Hz Lamp Flux:414.559x1 lm		
NAME: 8.02.040.0009 120° LLS-0P-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

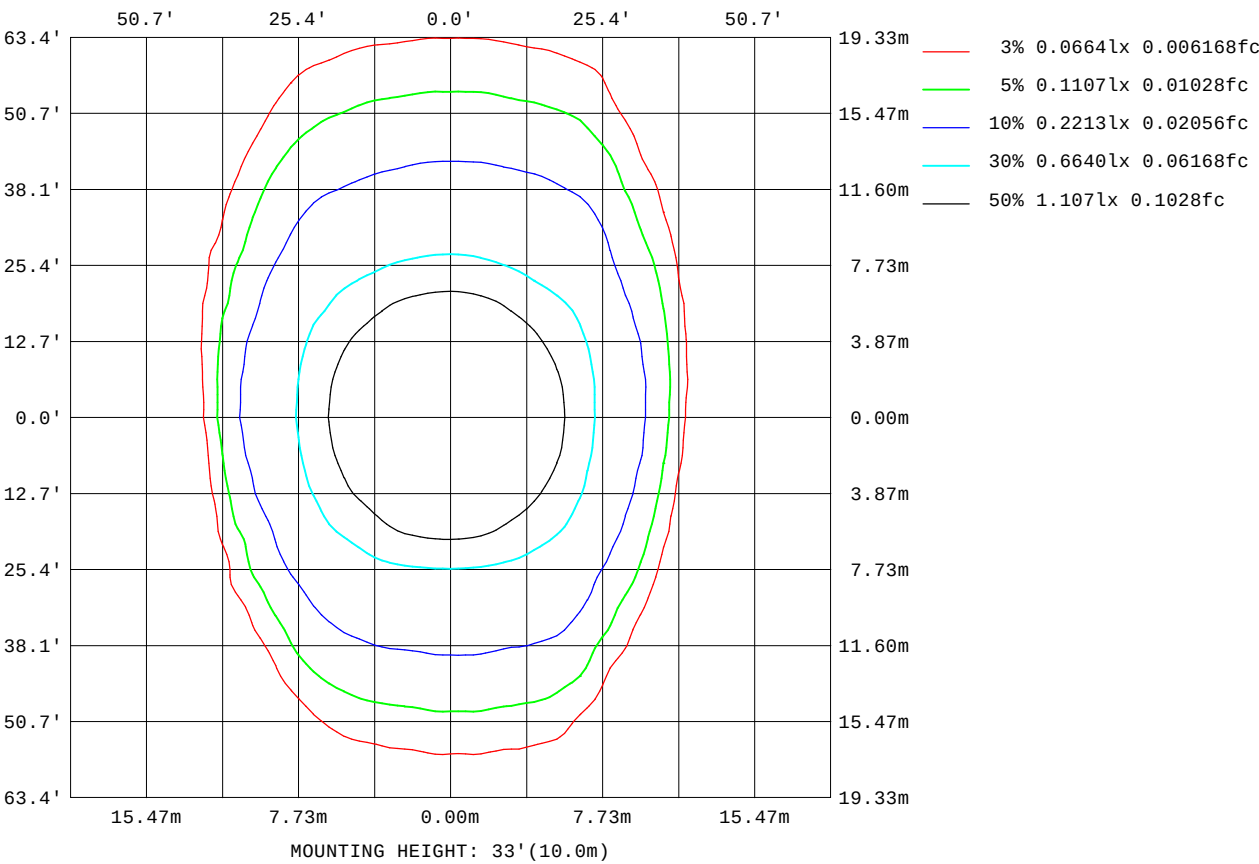

V(B) Range:-90 - 90DEG
H(B) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

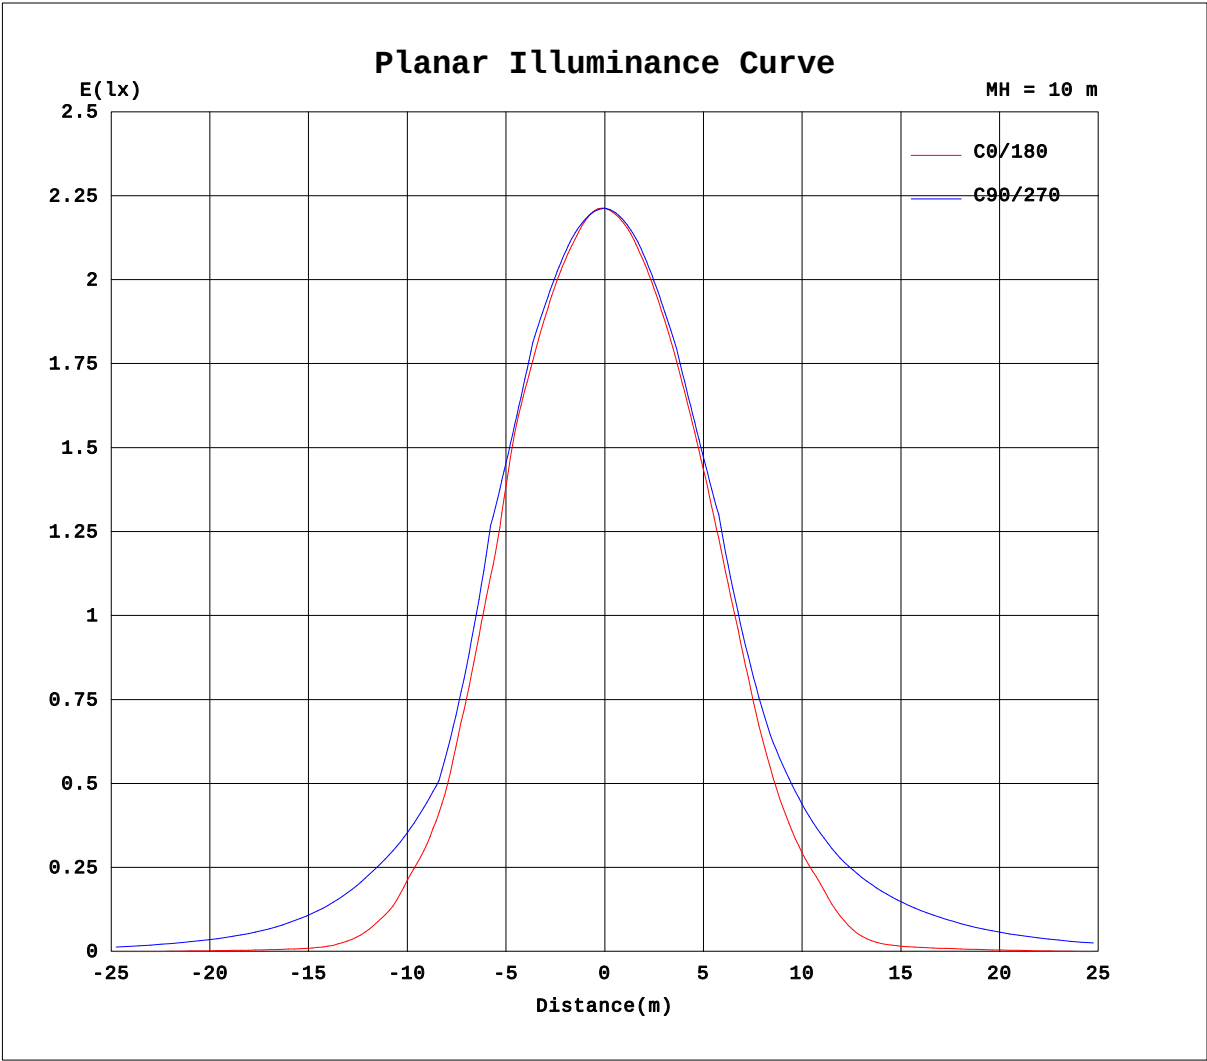


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:48.00V I:0.2593A P:12.44W PF:1.000 Freq:0Hz Lamp Flux:414.559x1 lm		
NAME: 8.02.040.0009 120° LLS-0P-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

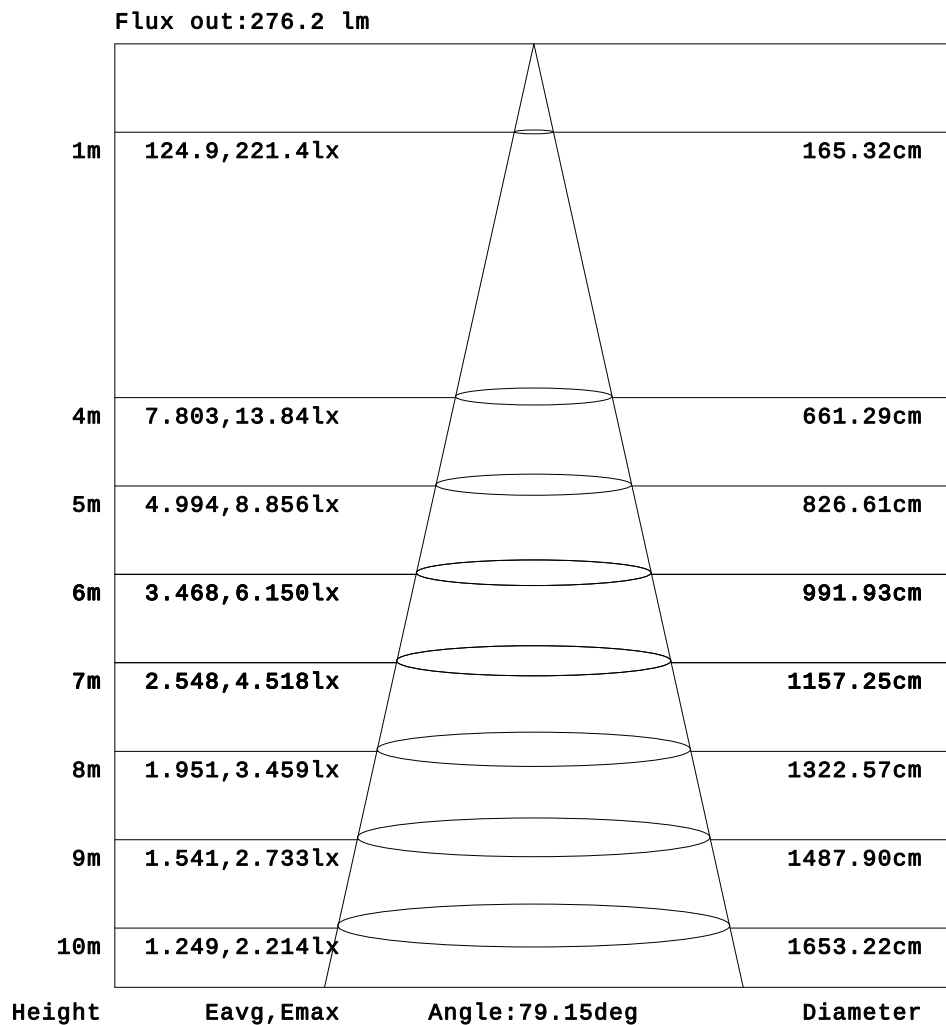

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:48.00V I:0.2593A P:12.44W PF:1.000 Freq:0Hz Lamp Flux:414.559x1 lm		
NAME: 8.02.040.0009 120° LLS-0P-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	8.17	10.1	10.5
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.16	16.3	20.1	21.0
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	9.61	17.9	25.2	32.2	34.6	35.8
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.70	19.2	35.8	46.3	48.1	49.1	50.6
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	12.1	22.6	42.6	57.6	64.9	66.4	67.1	68.7
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.57	24.2	42.4	66.0	79.5	83.5	84.6	85.2	86.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	3.53	19.1	40.1	62.0	84.2	94.8	99.4	99.8	99.5	100
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	7.06	37.6	55.9	81.6	102	110	115	115	114	114
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.39	1.87	4.03	20.6	46.8	76.0	107	125	137	148	152	154	154
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.77	3.74	7.09	34.2	56.1	96.1	133	148	164	181	189	194	195
-25	0.00	0.00	0.00	0.00	0.00	0.30	2.88	5.47	14.0	43.5	75.2	115	147	167	182	195	201	205	207
-20	0.00	0.00	0.00	0.00	0.00	0.59	4.99	7.20	20.9	52.8	94.3	133	162	185	200	208	212	217	219
-15	0.00	0.00	0.00	0.00	0.00	1.93	5.96	8.39	26.1	64.1	103	141	172	193	205	211	215	218	220
-10	0.00	0.00	0.00	0.00	0.00	3.27	6.93	9.59	31.4	75.4	112	150	182	200	209	214	217	220	221
-5	0.00	0.00	0.00	0.00	0.00	3.85	7.34	10.4	35.7	79.3	117	156	186	202	211	215	217	220	221
0	0.00	0.00	0.00	0.00	0.00	4.43	7.75	11.3	40.1	83.2	122	162	189	204	212	216	218	220	221
5	0.00	0.00	0.00	0.00	0.00	4.23	7.61	11.0	38.6	82.1	120	160	188	203	211	215	217	219	221
10	0.00	0.00	0.00	0.00	0.00	4.02	7.47	10.8	37.2	81.0	118	158	186	202	210	214	216	218	220
15	0.00	0.00	0.00	0.00	0.00	3.28	6.90	9.87	33.7	74.4	113	150	180	197	207	211	214	216	218
20	0.00	0.00	0.00	0.00	0.00	2.54	6.32	8.96	30.2	67.8	108	142	173	192	204	209	212	215	216
25	0.00	0.00	0.00	0.00	0.00	1.27	4.92	7.36	23.8	56.2	92.2	130	157	177	189	198	203	207	208
30	0.00	0.00	0.00	0.00	0.00	0.00	3.53	5.76	17.4	44.6	76.5	118	140	163	175	187	194	199	200
35	0.00	0.00	0.00	0.00	0.00	0.00	1.76	3.76	10.8	36.5	62.6	96.4	121	141	150	160	167	171	172
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.76	4.31	28.5	48.7	75.1	102	119	126	132	139	142	143
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	2.15	15.3	37.7	61.0	86.6	104	110	116	120	123	124
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.09	26.7	47.0	70.7	89.9	94.7	98.7	101	104	105
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	13.3	30.5	51.4	71.9	82.0	85.9	88.2	90.3	91.0
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	14.0	32.0	53.8	69.3	73.1	75.9	76.4	76.9
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.00	16.0	32.1	47.1	55.7	58.4	59.0	59.6
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.3	25.0	38.3	41.0	41.5	42.2
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.15	12.5	19.1	21.7	24.1	24.8
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.38	6.76	7.49
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-04-18

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:48.00V I:0.2593A P:12.44W PF:1.000 Freq:0Hz Lamp Flux:414.559x1 lm		
NAME: 8.02.040.0009 120° LLS-0P-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	9.38	7.50	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	18.8	15.0	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	34.7	32.6	23.8	14.4	6.88	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	50.7	50.2	47.5	28.8	13.8	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	69.1	67.2	66.1	55.5	34.8	18.0	7.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	87.5	84.2	84.7	82.3	55.9	36.0	14.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	101	98.8	101	98.3	81.4	52.2	30.9	11.6	1.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	114	113	116	114	107	68.5	47.4	23.3	3.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	153	148	142	134	125	93.0	61.1	35.7	12.4	2.37	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	192	183	168	154	143	118	74.7	48.2	21.2	4.74	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	205	199	189	174	156	135	91.0	59.6	29.3	8.90	2.88	1.25	0.00	0.00	0.00	0.00	0.00	0.00
-20	218	215	210	195	170	152	107	71.1	37.5	13.1	4.16	2.50	0.00	0.00	0.00	0.00	0.00	0.00
-15	219	217	213	203	182	160	119	77.8	45.0	17.0	5.25	3.23	0.80	0.00	0.00	0.00	0.00	0.00
-10	221	218	216	211	195	167	130	84.6	52.5	21.0	6.34	3.96	1.60	0.00	0.00	0.00	0.00	0.00
-5	221	219	216	212	199	170	134	88.4	56.4	23.2	6.91	4.21	1.85	0.00	0.00	0.00	0.00	0.00
0	221	219	217	212	203	172	137	92.1	60.3	25.4	7.49	4.46	2.10	0.00	0.00	0.00	0.00	0.00
5	220	218	216	211	200	171	137	91.1	59.7	25.5	7.39	4.31	1.97	0.00	0.00	0.00	0.00	0.00
10	219	217	215	210	197	169	137	90.2	59.0	25.5	7.29	4.17	1.84	0.00	0.00	0.00	0.00	0.00
15	217	214	212	204	185	164	130	84.0	52.8	22.3	6.30	3.57	1.19	0.00	0.00	0.00	0.00	0.00
20	215	212	209	198	173	159	122	77.8	46.7	19.1	5.32	2.98	0.54	0.00	0.00	0.00	0.00	0.00
25	206	201	192	179	161	147	106	69.5	40.3	15.0	3.96	1.98	0.27	0.00	0.00	0.00	0.00	0.00
30	197	190	176	161	149	135	90.2	61.3	33.9	10.9	2.60	0.98	0.00	0.00	0.00	0.00	0.00	0.00
35	170	162	152	140	134	116	75.7	50.8	24.9	6.52	1.30	0.49	0.00	0.00	0.00	0.00	0.00	0.00
40	142	135	129	119	118	97.8	61.2	40.2	15.9	2.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	123	119	116	109	104	77.9	50.1	28.3	8.38	1.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	105	103	102	97.6	89.8	57.9	39.0	16.5	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	91.2	88.8	87.7	83.5	66.4	42.0	22.9	8.24	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	77.4	74.5	73.2	69.5	43.0	26.1	6.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	59.5	58.2	56.4	45.1	24.5	13.0	3.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	41.6	41.9	39.5	20.6	5.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	24.6	22.0	19.8	10.3	2.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	7.72	2.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: