

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	531.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	144.3V x 102.6H
	At 50% of Imax	90.3V x 79.1H
	At 90% of Imax	57.9V x 52.6H

Beam Flux	Total	997.9 lumens per klm.
	To 10% of Imax	980.3 lumens per klm.
	To 50% of Imax	752.4 lumens per klm.
	To 90% of Imax	366.3 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.5118A P:12.28W PF:1.000 Freq:0Hz Lamp Flux:416.182x1 lm		
NAME: 8.02.040.0009 120°LLS-OP-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

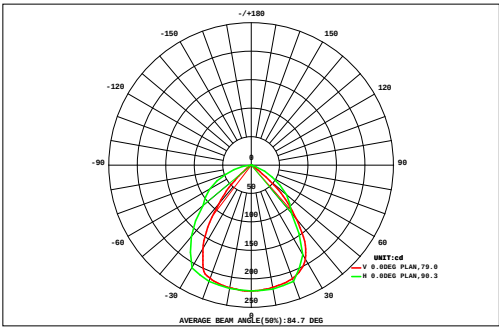

DATA OF LAMP		Eff:33.88lm/W	
MODELLS-OP-W20B-L10-DMX	Imax(cd)	221.2	
NOMINAL POWER(W)	12	AVAILABILITY(%)	98.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	410.0
NOMINAL FLUX(lm)	416.182	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	416.2
TEST VOLTAGE(V)	24	θ @50%(H,V)	79,90DEG


AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.56	0.93	0.92	0.54	0.15	0.00	0.00	0.00	0.00	0.00	0.00	3.26	2.55
70	0.00	0.00	0.00	0.00	0.00	0.18	0.99	1.83	1.98	1.99	1.83	0.85	0.15	0.00	0.00	0.00	0.00	0.00	9.79	9.41
60	0.00	0.00	0.00	0.00	0.07	0.91	2.22	2.79	2.99	2.99	2.82	2.08	0.71	0.06	0.00	0.00	0.00	0.00	17.6	17.4
50	0.00	0.00	0.00	0.02	0.42	1.76	3.09	3.70	4.07	4.02	3.70	3.03	1.50	0.30	0.01	0.00	0.00	0.00	25.6	25.4
40	0.00	0.00	0.01	0.09	0.88	2.55	4.08	5.08	5.64	5.54	4.86	3.86	2.20	0.67	0.05	0.00	0.00	0.00	35.5	35.2
30	0.00	0.00	0.03	0.18	1.30	3.40	5.08	6.09	6.53	6.53	5.91	4.71	2.88	1.00	0.12	0.01	0.00	0.00	43.8	43.4
20	0.00	0.00	0.05	0.25	1.68	3.83	5.51	6.26	6.59	6.60	6.29	5.23	3.30	1.22	0.17	0.02	0.00	0.00	47.0	46.6
10	0.00	0.00	0.05	0.27	1.78	3.96	5.60	6.32	6.65	6.67	6.34	5.48	3.44	1.31	0.19	0.03	0.00	0.00	48.1	47.7
0	0.00	0.00	0.05	0.25	1.68	3.84	5.53	6.30	6.66	6.68	6.35	5.41	3.31	1.21	0.17	0.03	0.00	0.00	47.4	47.1
-10	0.00	0.00	0.03	0.17	1.32	3.41	5.21	6.15	6.59	6.62	6.21	4.98	2.93	0.98	0.11	0.02	0.00	0.00	44.7	44.4
-20	0.00	0.00	0.01	0.09	0.85	2.67	4.45	5.52	6.11	6.09	5.42	4.14	2.23	0.61	0.05	0.00	0.00	0.00	38.2	37.9
-30	0.00	0.00	0.00	0.02	0.40	1.69	3.21	4.04	4.55	4.45	3.86	3.07	1.38	0.25	0.01	0.00	0.00	0.00	26.9	26.6
-40	0.00	0.00	0.00	0.00	0.08	0.84	1.98	2.59	2.73	2.77	2.72	1.93	0.60	0.03	0.00	0.00	0.00	0.00	16.3	16.0
-50	0.00	0.00	0.00	0.00	0.00	0.16	0.93	1.70	1.91	1.92	1.72	0.73	0.08	0.00	0.00	0.00	0.00	0.00	9.15	8.68
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.51	0.75	0.76	0.47	0.05	0.00	0.00	0.00	0.00	0.00	0.00	2.62	1.71
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.00	0.22	1.34	10.5	29.2	48.1	59.4	64.7	64.6	59.0	45.7	24.7	7.63	0.88	0.11	0.00	0.00	416	---
Φ a	0.00	0.00	0.00	0.37	10.0	28.9	47.7	59.1	64.3	64.2	58.8	45.3	24.3	6.94	0.11	0.00	0.00	0.00	---	410

one-half-peak spread: U:40.4,D:50.5 , L:42.8,Beam Type: Type 6 x 7 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.5118A P:12.28W PF:1.000 Freq:0Hz Lamp Flux:416.182x1 lm		
NAME: 8.02.040.0009 120°LLS-OP-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

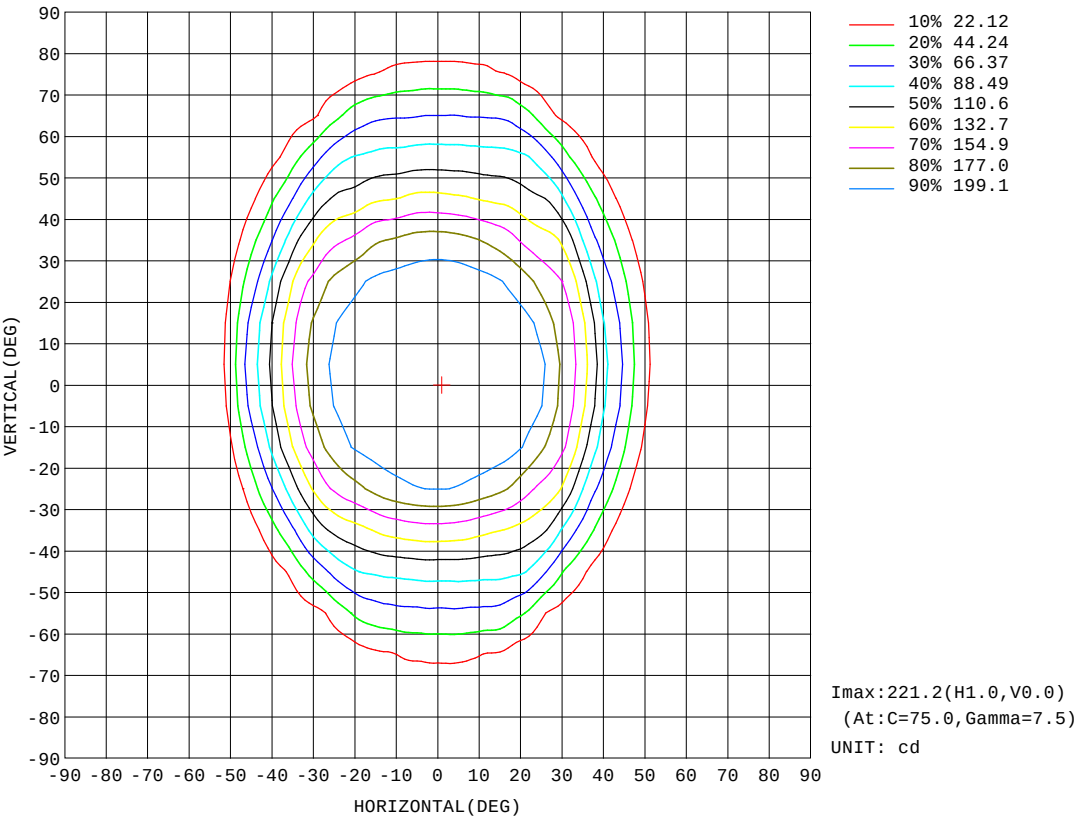


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.5118A P:12.28W PF:1.000 Freq:0Hz Lamp Flux:416.182x1 lm		
NAME: 8.02.040.0009 120°LLS-OP-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

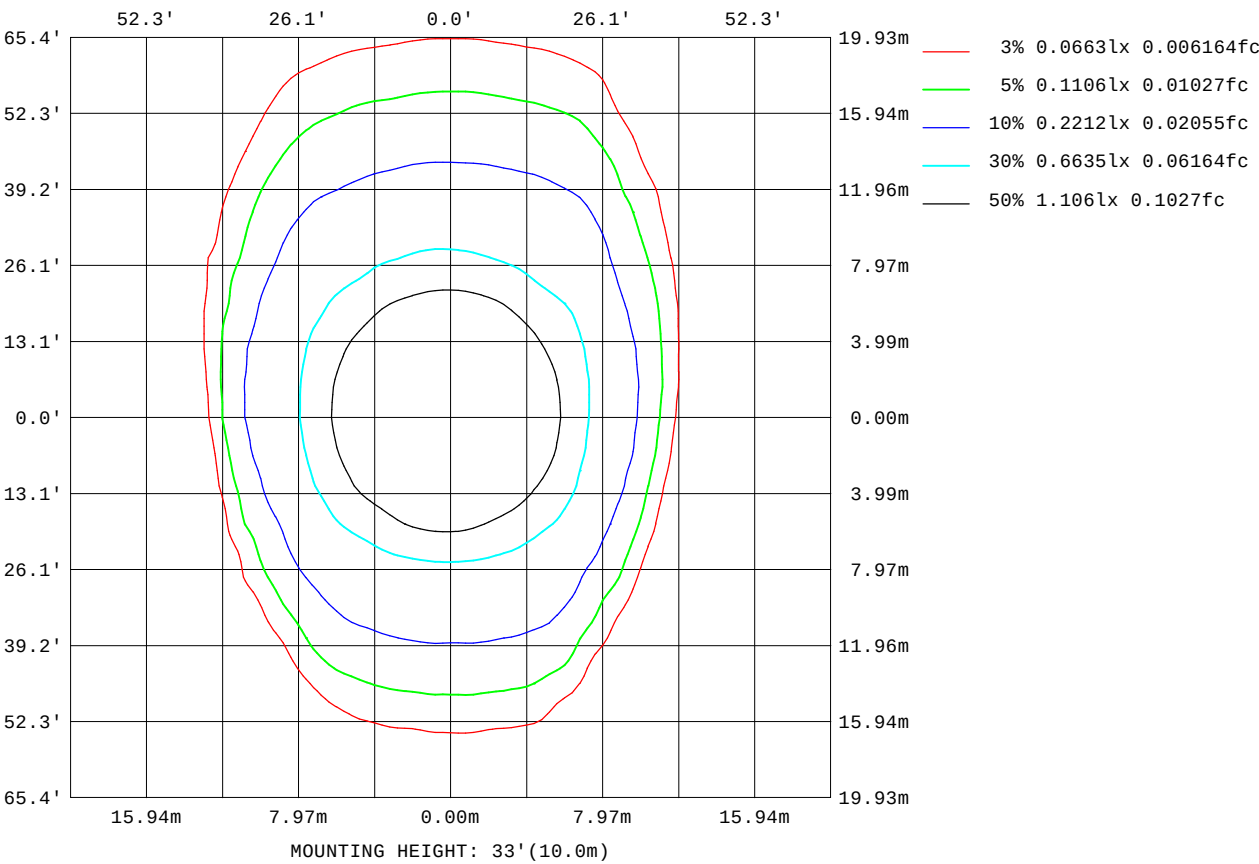

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

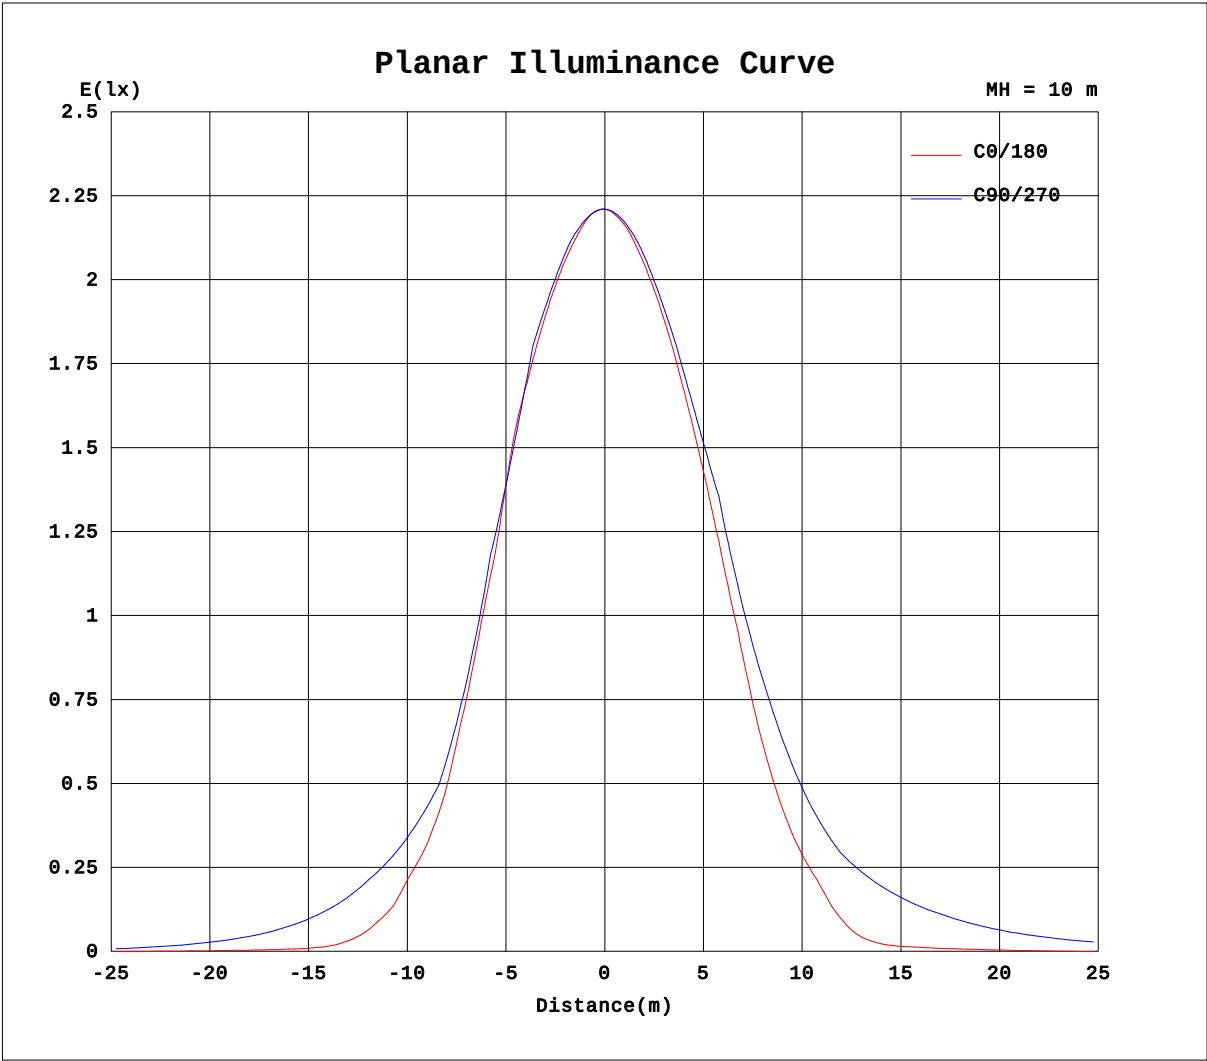


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.5118A P:12.28W PF:1.000 Freq:0Hz Lamp Flux:416.182x1 lm		
NAME: 8.02.040.0009 120°LLS-OP-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

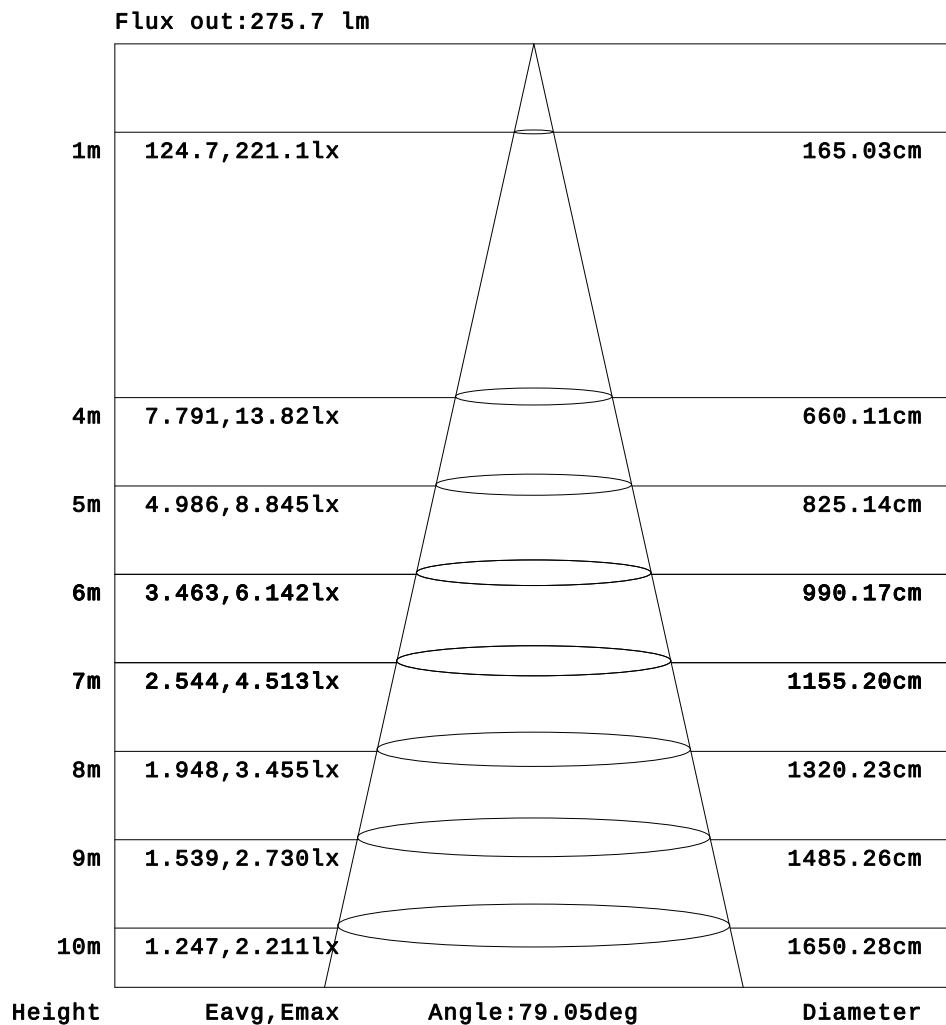

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.5118A P:12.28W PF:1.000 Freq:0Hz Lamp Flux:416.182x1 lm		
NAME: 8.02.040.0009 120°LLS-OP-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.67	4.81	4.99
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.31	9.69	9.94
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.06	11.3	18.2	21.9	25.4	26.5
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.8	26.3	38.1	41.1	41.5	43.3
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.00	15.5	30.6	47.5	56.2	60.3	61.4	62.2
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	15.8	34.2	57.6	74.3	77.0	80.5	81.9	81.2
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	1.14	12.6	28.9	51.7	72.5	86.8	91.1	93.6	95.6	96.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	4.06	31.3	52.1	76.9	95.1	103	107	108	110	111
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.22	2.29	13.5	37.0	63.4	95.4	115	125	134	141	145	147
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.24	2.78	5.83	31.6	53.3	87.0	125	141	150	166	177	182	182
-25	0.00	0.00	0.00	0.00	0.00	0.00	1.53	4.33	9.48	34.3	65.7	101	135	158	171	183	193	198	200
-20	0.00	0.00	0.00	0.00	0.00	0.23	3.68	6.64	20.0	49.7	90.7	130	157	181	197	206	211	216	217
-15	0.00	0.00	0.00	0.00	0.00	1.01	4.64	7.43	19.5	55.3	93.4	133	164	187	201	208	213	217	219
-10	0.00	0.00	0.00	0.00	0.00	3.24	6.76	9.54	31.7	74.9	112	149	181	200	209	214	217	220	221
-5	0.00	0.00	0.00	0.00	0.00	2.85	6.79	9.44	29.2	72.6	110	149	181	200	209	214	217	219	221
0	0.00	0.00	0.00	0.00	0.00	4.67	7.82	12.1	43.0	85.2	124	164	190	205	212	216	218	220	221
5	0.00	0.00	0.00	0.00	0.00	3.60	7.30	10.2	33.5	78.3	115	156	185	202	210	214	217	219	220
10	0.00	0.00	0.00	0.00	0.00	4.52	7.75	11.9	41.7	84.7	123	162	189	204	211	214	217	219	220
15	0.00	0.00	0.00	0.00	0.00	2.92	6.80	9.52	30.6	72.5	111	149	179	198	207	212	214	217	218
20	0.00	0.00	0.00	0.00	0.00	3.47	6.81	10.2	34.9	75.6	115	150	178	197	206	210	213	216	217
25	0.00	0.00	0.00	0.00	0.00	1.15	5.14	7.56	22.6	56.1	93.4	132	160	182	194	203	208	211	213
30	0.00	0.00	0.00	0.00	0.00	0.48	4.52	6.71	23.4	49.8	89.0	129	152	172	187	198	204	207	209
35	0.00	0.00	0.00	0.00	0.00	0.00	2.06	4.45	11.4	38.0	65.8	101	129	150	160	174	179	186	187
40	0.00	0.00	0.00	0.00	0.00	0.00	0.63	3.05	7.71	36.7	55.8	87.0	117	132	139	153	158	165	164
45	0.00	0.00	0.00	0.00	0.00	0.00	0.09	1.32	2.92	17.4	41.4	66.1	94.7	113	119	129	132	138	138
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	7.24	36.8	56.7	81.7	99.3	103	107	109	112	111
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	2.02	15.8	36.1	57.5	78.9	89.4	93.5	95.4	97.8	98.2
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.08	24.6	42.3	64.9	77.4	81.5	82.0	84.0	84.9
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.0	19.0	38.1	54.2	62.5	64.4	65.4	66.4	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.06	17.7	35.2	44.8	46.9	47.9	48.0	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.58	16.0	22.4	28.7	31.2	32.0	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.80	12.1	15.4	15.9
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-04-18

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.5118A P:12.28W PF:1.000 Freq:0Hz Lamp Flux:416.182x1 lm		
NAME: 8.02.040.0009 120°LLS-OP-W20B-L10-DMX	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025040035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	4.84	2.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	9.57	1.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	26.3	23.1	19.9	9.54	2.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	42.3	41.6	36.8	17.0	2.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	62.7	61.5	59.5	47.1	26.2	14.3	4.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	82.3	80.4	78.3	72.1	42.4	23.9	4.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	96.5	95.5	95.1	91.6	73.0	45.4	26.0	9.32	0.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	111	110	111	107	92.4	57.7	38.7	14.2	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	145	139	133	126	116	86.5	57.8	32.1	11.0	2.07	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	177	166	154	142	132	103	67.1	39.9	15.8	3.08	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	197	191	181	167	150	131	88.8	57.9	28.8	8.70	2.64	1.18	0.00	0.00	0.00	0.00	0.00	0.00
-20	216	213	204	185	163	145	94.8	64.0	31.9	9.73	3.63	1.97	0.00	0.00	0.00	0.00	0.00	0.00
-15	219	216	211	200	181	159	119	78.1	46.1	17.9	5.38	3.17	0.86	0.00	0.00	0.00	0.00	0.00
-10	220	218	215	210	189	162	124	79.2	45.9	17.8	5.78	3.63	1.03	0.00	0.00	0.00	0.00	0.00
-5	221	219	216	212	200	171	137	91.1	59.2	25.6	7.54	4.33	2.08	0.00	0.00	0.00	0.00	0.00
0	221	219	216	212	200	170	133	88.9	56.1	22.9	6.93	4.31	1.78	0.00	0.00	0.00	0.00	0.00
5	220	218	216	212	203	174	142	96.4	64.0	29.2	8.61	4.63	2.40	0.00	0.00	0.00	0.00	0.00
10	219	217	215	210	197	169	135	88.9	56.9	24.0	7.07	4.19	1.75	0.00	0.00	0.00	0.00	0.00
15	218	215	213	208	192	168	137	89.8	59.4	26.7	7.70	4.08	1.85	0.00	0.00	0.00	0.00	0.00
20	216	212	209	201	176	160	122	77.7	46.7	18.9	5.53	3.23	0.62	0.00	0.00	0.00	0.00	0.00
25	212	207	200	188	170	155	118	76.1	47.1	19.6	5.26	2.71	0.66	0.00	0.00	0.00	0.00	0.00
30	207	200	187	168	156	141	94.5	64.0	34.9	11.7	3.26	1.51	0.00	0.00	0.00	0.00	0.00	0.00
35	184	177	168	153	141	129	88.0	58.5	31.7	10.1	2.23	0.92	0.00	0.00	0.00	0.00	0.00	0.00
40	159	151	144	131	123	105	66.1	42.4	18.3	3.10	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	136	131	128	120	112	91.8	59.9	36.3	14.2	2.27	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	111	110	110	105	97.7	64.7	44.0	20.2	2.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	97.8	96.4	95.6	92.4	78.5	53.7	31.8	12.5	2.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	84.1	82.1	80.9	76.9	50.3	32.3	11.2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	66.3	65.2	63.9	54.3	35.6	18.0	7.71	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	47.7	47.7	45.5	25.8	11.2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	31.5	29.0	23.1	15.1	7.42	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	14.4	9.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-04-18

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: