

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1307.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	89.2V x 87.7H
	At 50% of Imax	49.7V x 49.1H
	At 90% of Imax	17.1V x 18.2H
Beam Flux	Total	998.9 lumens per klm.
	To 10% of Imax	926.4 lumens per klm.
	To 50% of Imax	531.2 lumens per klm.
	To 90% of Imax	80.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.8V I:0.0921A P:11.04W PF:0.5426 Lamp Flux:607.20lx1 lm		
NAME: 8.02.019.0097 60° LLS-OP-W30B-L6-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

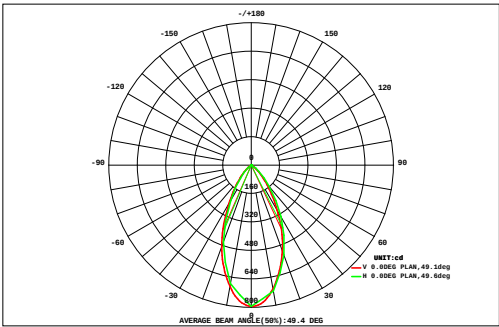

DATA OF LAMP		Eff:55.02lm/W	
MODEL LLS-OP-W30B-L6-DIM	Imax(cd)	793.7	
NOMINAL POWER(W)	12	AVAILABILITY(%)	93.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	564.7
NOMINAL FLUX(lm)	607.201	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	607.2
TEST VOLTAGE(V)	220.8	θ @50%(H,V)	49,50DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.14	0.15	0.12	0.05	0.00	0.00	0.00	0.00	0.00	0.58	0.00
56	0.00	0.00	0.00	0.00	0.09	0.25	0.44	0.65	0.80	0.83	0.73	0.54	0.33	0.16	0.03	0.00	0.00	4.85	0.00
48	0.00	0.00	0.00	0.08	0.32	0.70	1.18	1.66	2.01	2.07	1.83	1.38	0.89	0.47	0.16	0.02	0.00	12.8	6.99
40	0.00	0.00	0.02	0.27	0.74	1.43	2.37	3.35	4.02	4.10	3.58	2.67	1.69	0.92	0.39	0.08	0.00	25.6	22.5
32	0.00	0.00	0.10	0.50	1.23	2.42	4.13	5.90	7.03	7.11	6.19	4.59	2.84	1.51	0.67	0.20	0.01	44.4	42.1
24	0.00	0.00	0.18	0.71	1.76	3.57	6.21	8.73	10.2	10.3	9.15	6.95	4.31	2.22	0.97	0.32	0.03	65.6	63.7
	0.00	0.01	0.22	0.84	2.10	4.38	7.66	10.8	12.8	13.1	11.5	8.74	5.53	2.84	1.24	0.42	0.06	82.3	80.6
	0.00	0.01	0.25	0.92	2.32	4.87	8.56	12.1	14.6	14.9	12.8	9.64	6.11	3.13	1.36	0.46	0.07	92.1	90.4
	0.00	0.02	0.27	0.96	2.37	4.93	8.62	12.2	14.6	14.8	12.6	9.26	5.74	2.91	1.24	0.41	0.06	91.0	89.3
	0.00	0.01	0.21	0.78	1.93	4.02	7.10	10.2	12.2	12.4	10.8	7.99	4.86	2.48	1.08	0.36	0.04	76.4	74.6
	0.00	0.00	0.11	0.53	1.33	2.69	4.71	7.01	8.58	8.85	7.75	5.73	3.54	1.85	0.82	0.27	0.03	53.8	51.6
-24	0.00	0.00	0.04	0.31	0.84	1.67	2.85	4.18	5.14	5.35	4.73	3.53	2.24	1.21	0.54	0.16	0.01	32.8	30.1
-32	0.00	0.00	0.01	0.13	0.45	0.91	1.49	2.10	2.54	2.64	2.33	1.76	1.15	0.64	0.26	0.05	0.00	16.5	12.3
-40	0.00	0.00	0.00	0.02	0.16	0.39	0.65	0.89	1.06	1.08	0.94	0.71	0.45	0.21	0.05	0.00	0.00	6.62	0.49
-48	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.22	0.29	0.31	0.28	0.21	0.11	0.04	0.01	0.00	0.00	1.65	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.05	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.27	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.04	1.43	6.06	15.6	32.3	56.1	80.1	96.1	98.0	85.3	63.8	39.8	20.6	8.83	2.75	0.31	0.00	607
Φ a	0.00	0.00	0.00	1.02	11.9	29.2	53.6	77.6	93.4	95.3	82.8	61.5	36.8	17.4	4.07	0.00	0.00	0.00	565


one-half-peak spread: U:23.0,D:27.1 , L:23.9,R:25.5 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.0921A P:11.04W PF:0.5426 Lamp Flux:607.20lx1 lm		
NAME: 8.02.019.0097 60° LLS-OP-W30B-L6-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

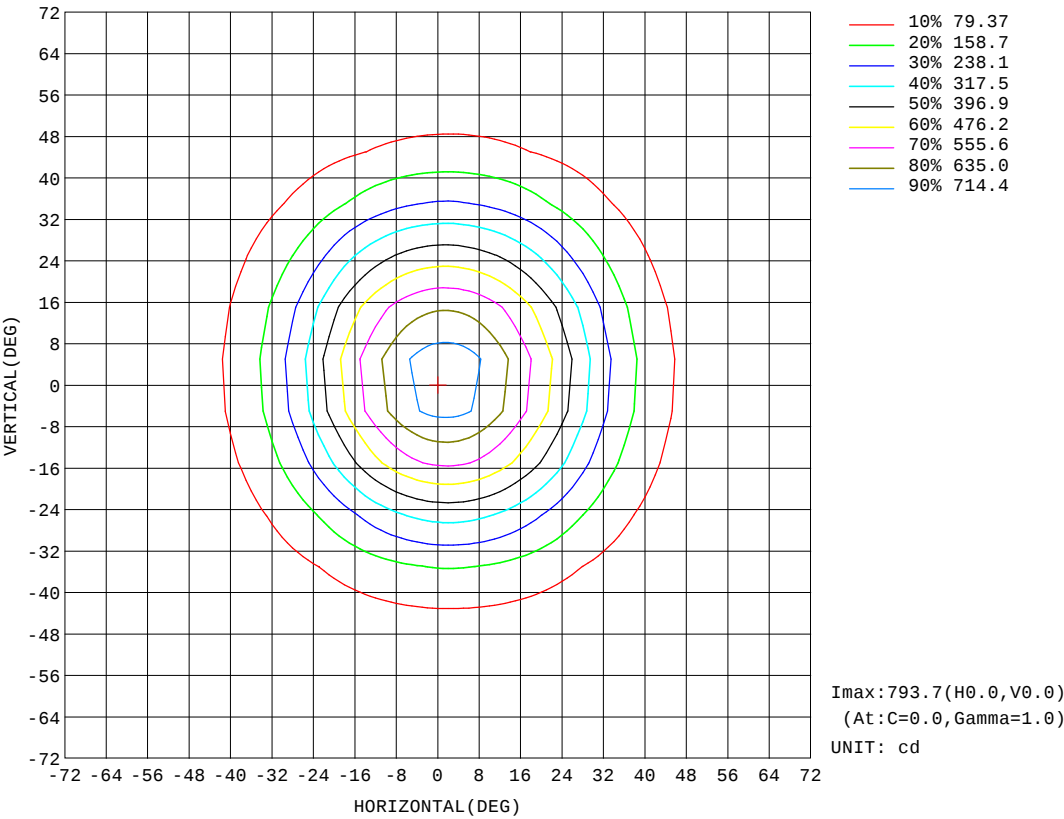


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.8V I:0.0921A P:11.04W PF:0.5426 Lamp Flux:607.20lx1 lm		
NAME: 8.02.019.0097 60° LLS-OP-W30B-L6-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

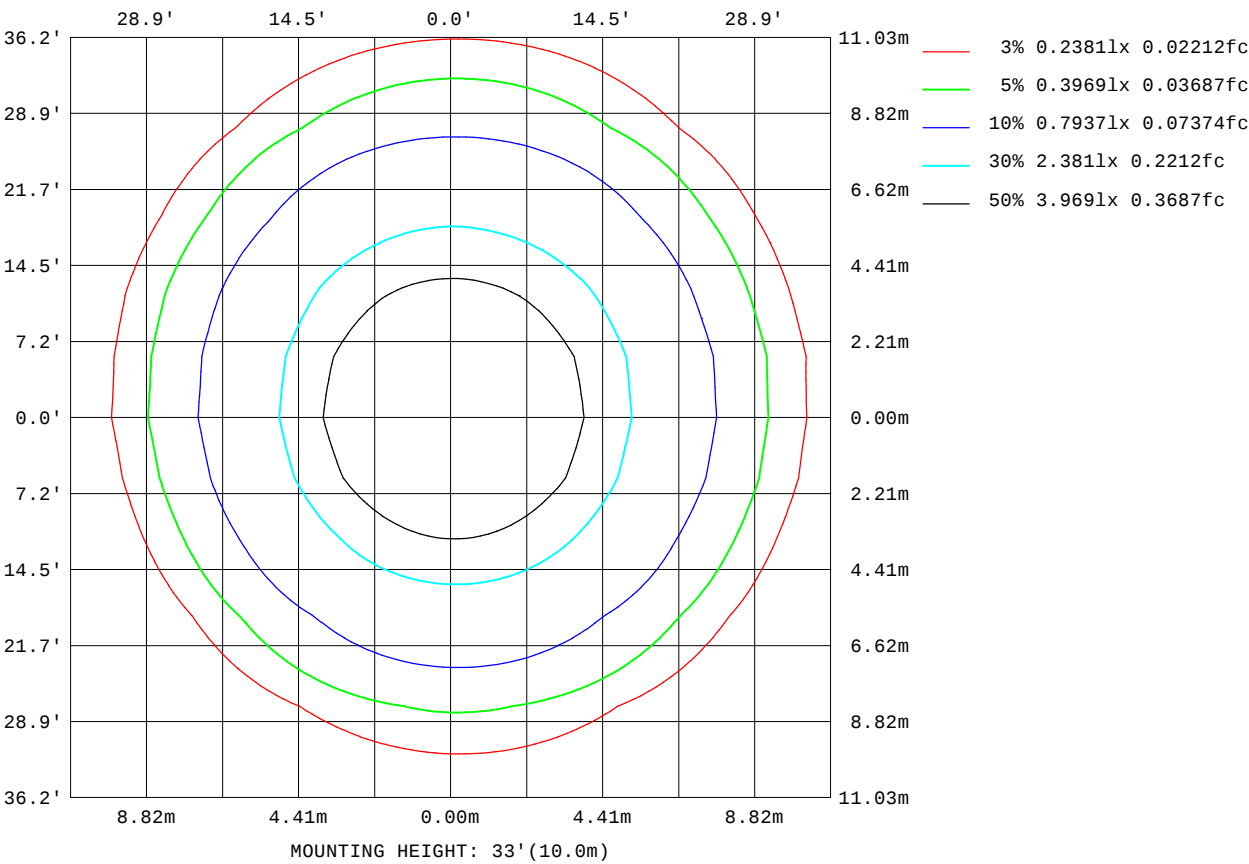


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.0921A P:11.04W PF:0.5426 Lamp Flux:607.20lx1 lm		
NAME: 8.02.019.0097 60° LLS-OP-W30B-L6-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

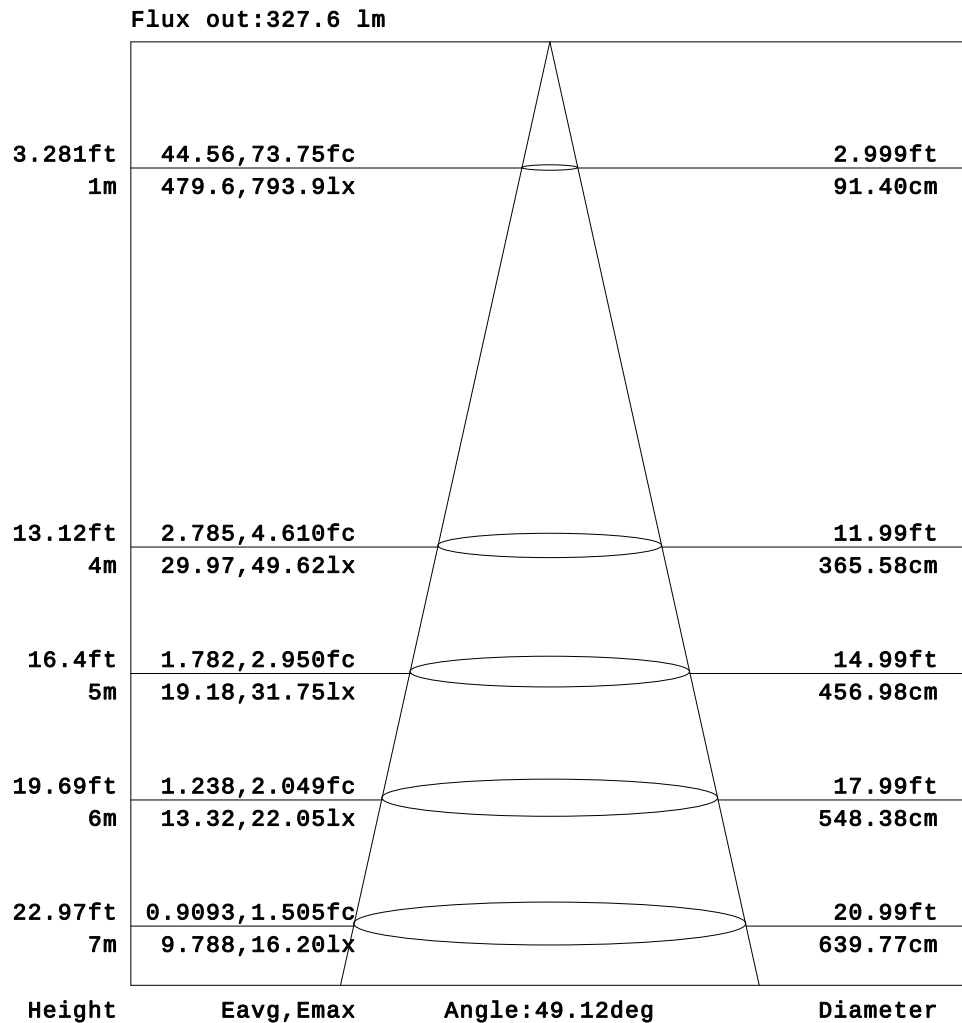


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

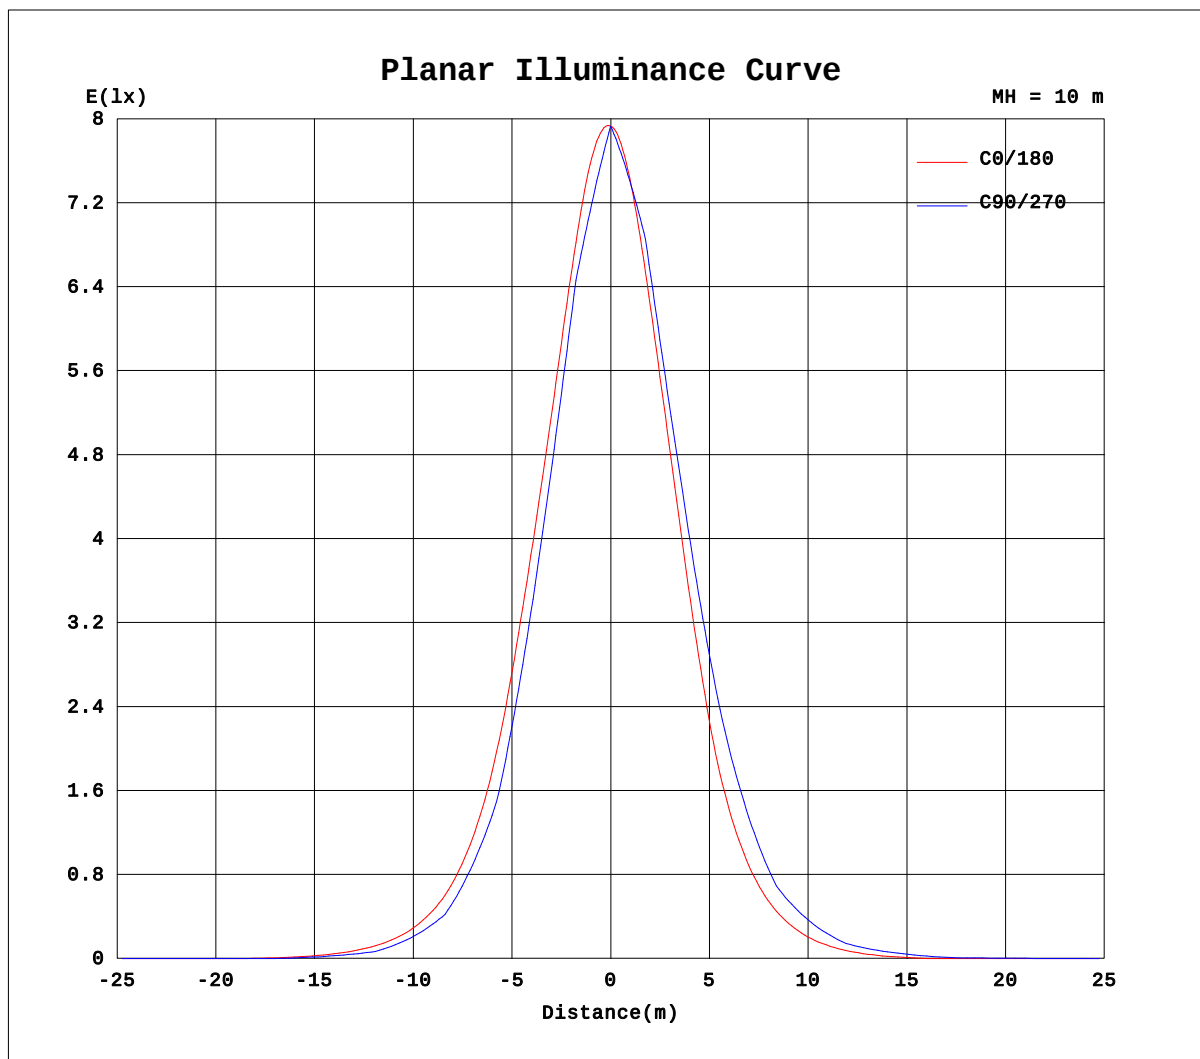

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.0921A P:11.04W PF:0.5426 Lamp Flux:607.201x1 lm		
NAME: 8.02.019.0097 60° LLS-OP-W30B-L6-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.23	3.74	6.23	8.55	10.6	12.1	13.0
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.47	8.48	13.4	18.0	21.9	24.7	26.2
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.38	4.58	9.51	16.4	25.0	34.0	42.7	50.6	56.5	59.9
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.32	11.0	21.2	32.7	45.2	58.2	70.7	82.0	90.2	94.2
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.51	7.68	19.4	33.7	50.9	70.8	93.0	116	137	153	162
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.06	17.3	33.1	52.7	76.7	105	137	170	199	221	231
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	8.25	23.0	42.7	68.4	102	143	192	244	292	326	344
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.86	16.6	35.7	61.5	96.2	142	200	267	339	400	442	460
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.23	17.8	38.7	68.0	109	165	236	322	410	487	541	567
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.40	26.1	51.9	88.8	141	214	306	413	515	599	655	677
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.11	24.6	50.5	88.2	141	216	314	428	536	630	700	734
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.7	31.9	62.2	106	168	253	367	488	597	693	765	794
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.04	26.3	53.3	93.1	150	228	331	448	556	648	720	754
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.5	29.8	58.3	99.9	159	239	342	454	553	635	694	718
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.93	22.5	46.5	81.1	129	196	281	381	474	549	601	626
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.99	23.4	46.6	79.2	124	184	260	348	428	487	523	537
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.19	14.6	32.9	58.2	92.2	137	194	262	329	382	419	435
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	12.2	28.2	49.3	76.5	111	154	204	254	295	323	335
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.86	16.7	32.6	52.5	77.5	107	143	178	210	233	244
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.20	11.0	23.2	37.7	54.9	74.4	95.7	117	136	149	154
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	4.43	10.9	21.3	33.4	46.9	61.5	76.0	89.2	99.1	104
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.56	9.54	17.2	25.2	33.3	40.9	47.5	52.3	54.6
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	4.04	7.79	11.8	16.1	21.3	25.8	29.2	31.1
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	3.63	5.74	7.22	7.94
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	1.58	2.68	3.50	3.93
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.0921A P:11.04W PF:0.5426 Lamp Flux:607.201x1 lm		
NAME: 8.02.019.0097 60° LLS-OP-W30B-L6-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	13.1	12.5	11.2	9.33	7.08	4.64	2.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	26.1	24.6	21.7	17.8	13.2	8.28	3.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	59.9	56.8	50.8	43.1	34.4	25.5	16.9	9.29	4.51	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	92.9	86.9	77.0	65.0	52.0	39.2	27.3	16.5	7.27	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	162	153	136	115	92.4	70.4	50.6	33.6	19.5	8.10	1.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	228	213	188	156	124	93.1	66.5	44.6	26.8	12.8	1.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	343	322	287	240	189	141	99.3	66.8	41.7	22.6	8.36	0.39	0.00	0.00	0.00	0.00	0.00	0.00
-20	452	419	368	304	234	170	118	77.9	48.0	26.1	10.1	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-15	562	526	468	393	309	226	156	104	64.7	36.7	16.8	2.90	0.00	0.00	0.00	0.00	0.00	0.00
-10	663	613	539	450	350	250	172	112	68.5	38.3	17.1	2.56	0.00	0.00	0.00	0.00	0.00	0.00
-5	725	674	594	502	399	292	201	132	81.8	46.5	22.3	5.90	0.00	0.00	0.00	0.00	0.00	0.00
0	773	706	613	514	405	294	201	129	78.6	43.6	20.0	4.09	0.00	0.00	0.00	0.00	0.00	0.00
5	745	693	611	519	417	306	211	138	85.8	48.6	23.5	6.53	0.00	0.00	0.00	0.00	0.00	0.00
10	703	650	573	485	385	277	190	124	75.7	42.1	19.1	3.67	0.00	0.00	0.00	0.00	0.00	0.00
15	620	583	522	446	356	261	181	119	74.0	41.9	19.7	4.34	0.00	0.00	0.00	0.00	0.00	0.00
20	526	495	443	373	290	211	144	94.1	57.6	31.6	13.1	0.61	0.00	0.00	0.00	0.00	0.00	0.00
25	430	406	366	310	245	181	127	84.1	52.3	29.0	12.1	1.19	0.00	0.00	0.00	0.00	0.00	0.00
30	326	304	268	222	173	128	90.0	59.8	36.5	18.8	5.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	241	227	202	170	135	101	72.3	48.5	29.4	14.6	3.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	152	141	124	104	82.6	62.3	44.2	28.7	15.8	5.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	104	97.6	87.0	73.5	58.9	44.7	31.4	19.8	9.73	3.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	53.9	50.3	44.6	37.4	29.5	21.5	13.7	6.50	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	31.1	29.2	25.6	21.1	15.9	11.5	7.62	3.94	0.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.78	6.78	5.02	2.76	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.95	3.52	2.71	1.62	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-21

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: