

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	977.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	85.8V x 83.4H
	At 50% of Imax	66.5V x 68.4H
	At 90% of Imax	38.0V x 38.6H

Beam Flux	Total	993.5 lumens per klm.
	To 10% of Imax	975.9 lumens per klm.
	To 50% of Imax	817.9 lumens per klm.
	To 90% of Imax	309.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.3 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.0522A P:6.219W PF:1.000 Freq:50.00Hz Lamp Flux:290.402x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010024
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

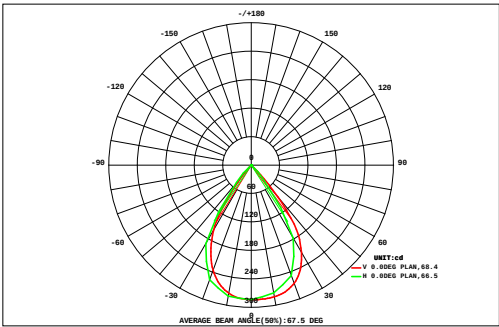

DATA OF LAMP		Eff:46.69lm/W	
MODEL LLS-OP-W30B-L3-DIM		Imax(cd)	283.7
NOMINAL POWER(W)	6	AVAILABILITY(%)	98.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	286.6
NOMINAL FLUX(lm)	290.402	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	290.4
TEST VOLTAGE(V)	220	θ @50%(H,V)	68,67DEG


AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.01	0.14	0.33	0.44	0.38	0.20	0.02	0.00	0.00	0.00	0.00	0.00	0.00	1.52	0.84
32	0.00	0.00	0.00	0.00	0.05	0.34	0.93	1.50	1.77	1.63	1.12	0.50	0.14	0.00	0.00	0.00	0.00	0.00	7.97	7.50
24	0.00	0.00	0.00	0.01	0.30	1.62	3.12	3.93	4.20	4.06	3.44	2.25	0.74	0.03	0.00	0.00	0.00	0.00	23.7	23.4
	0.00	0.00	0.00	0.08	1.26	3.03	4.10	4.73	4.99	4.91	4.42	3.51	2.04	0.37	0.00	0.00	0.00	0.00	33.4	33.3
	0.00	0.00	0.00	0.27	1.93	3.60	4.60	5.17	5.40	5.35	4.94	4.09	2.75	0.88	0.02	0.00	0.00	0.00	39.0	38.8
	0.00	0.00	0.00	0.43	2.32	3.85	4.82	5.34	5.53	5.50	5.14	4.32	3.07	1.22	0.03	0.00	0.00	0.00	41.6	41.4
	0.00	0.00	0.00	0.46	2.34	3.85	4.81	5.31	5.48	5.43	5.06	4.25	3.01	1.21	0.04	0.00	0.00	0.00	41.2	41.1
	0.00	0.00	0.00	0.29	1.96	3.54	4.53	5.09	5.27	5.17	4.75	3.92	2.67	0.88	0.01	0.00	0.00	0.00	38.1	37.9
	0.00	0.00	0.00	0.08	1.19	2.88	3.93	4.58	4.83	4.69	4.16	3.27	1.87	0.32	0.00	0.00	0.00	0.00	31.8	31.6
-24	0.00	0.00	0.00	0.01	0.38	1.59	2.80	3.53	3.80	3.64	3.05	2.04	0.76	0.06	0.00	0.00	0.00	0.00	21.7	21.4
-32	0.00	0.00	0.00	0.00	0.03	0.42	1.23	1.80	2.04	1.89	1.41	0.69	0.10	0.00	0.00	0.00	0.00	0.00	9.60	9.09
-40	0.00	0.00	0.00	0.00	0.00	0.05	0.16	0.25	0.19	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.72	0.14
-48	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.00	0.00	0.00	1.63	11.8	24.7	35.1	41.5	44.0	42.9	37.8	28.9	17.1	4.97	0.10	0.00	0.00	0.00	290	---
Φ a	0.00	0.00	0.00	1.17	11.4	24.5	34.7	41.2	43.8	42.6	37.3	28.7	16.8	4.50	0.00	0.00	0.00	0.00	---	287

one-half-peak spread: U:33.0,D:33.8 , L:34.9,R:33.8 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-01-14
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.7V I:0.0522A P:6.219W PF:1.000 Freq:50.00Hz Lamp Flux:290.402x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010024
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

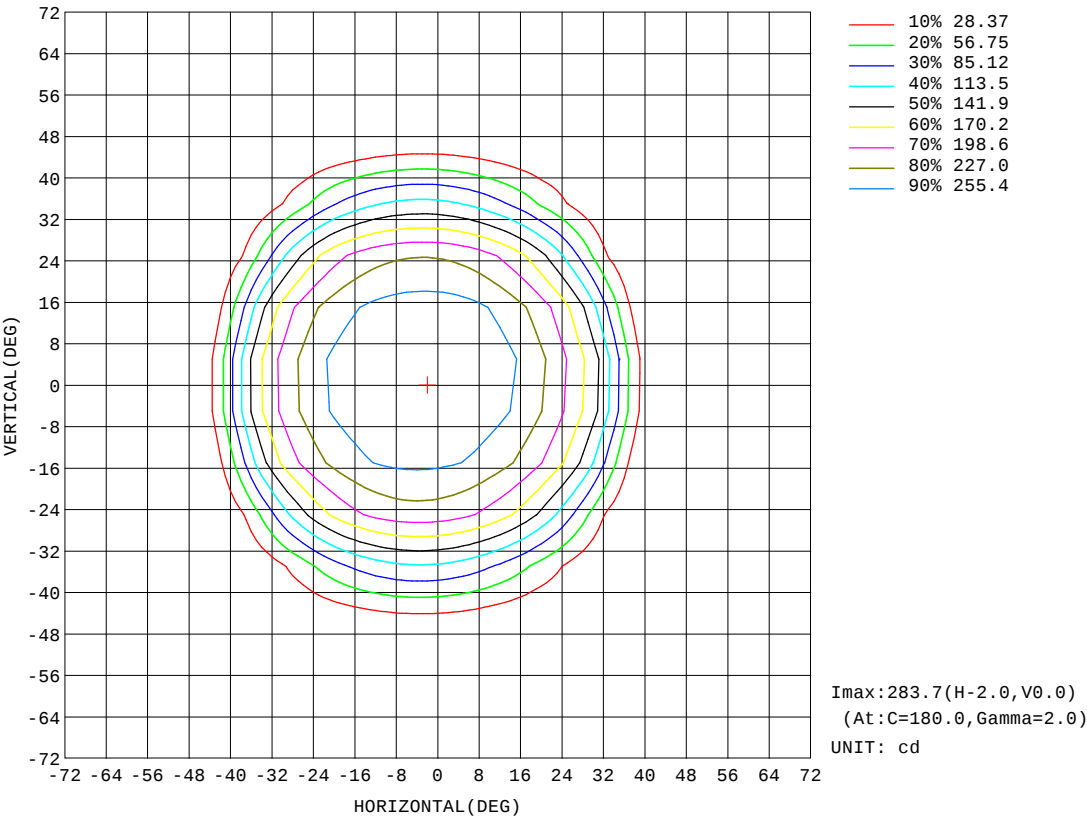


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.7V I:0.0522A P:6.219W PF:1.000 Freq:50.00Hz Lamp Flux:290.402x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010024
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

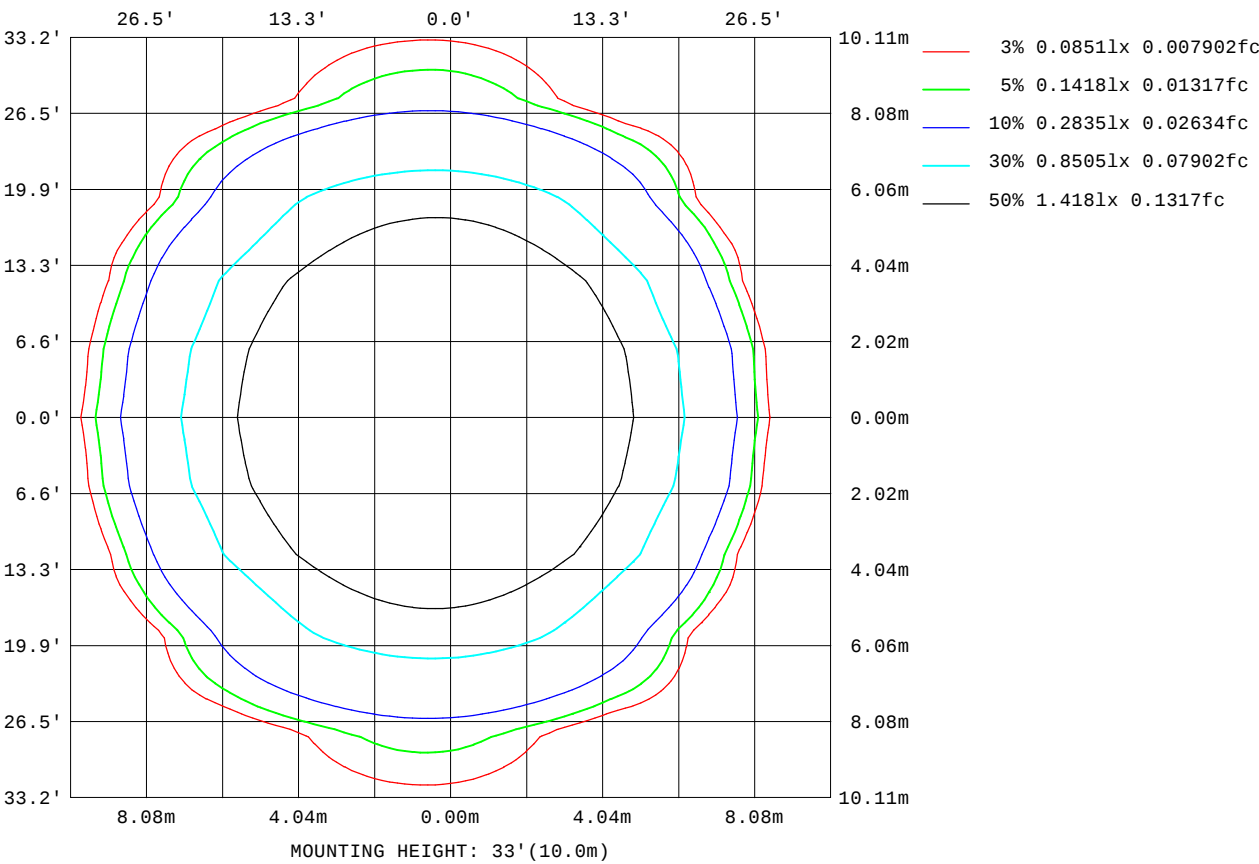

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

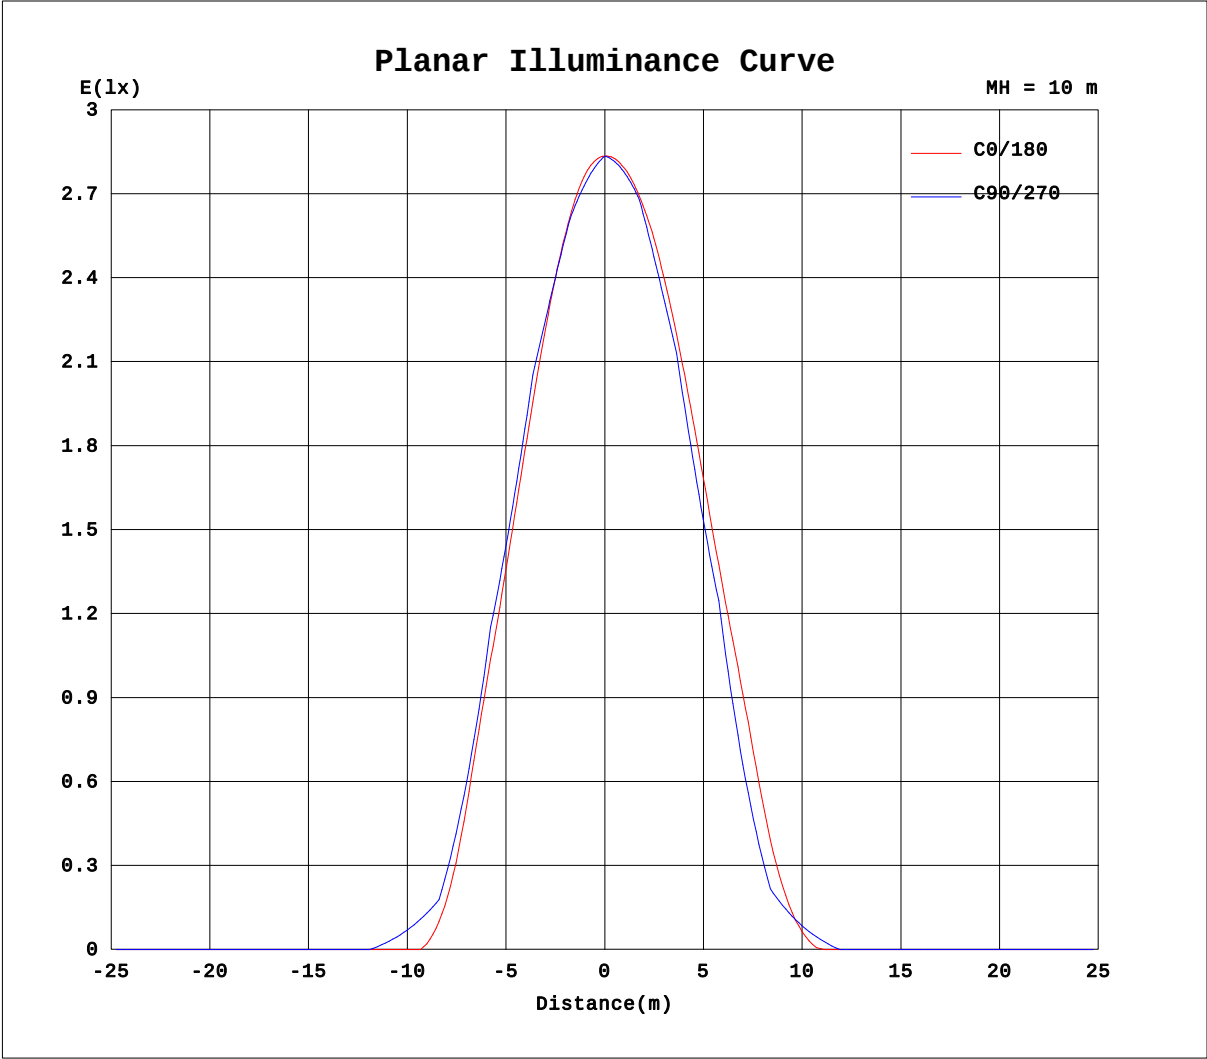


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.7V I:0.0522A P:6.219W PF:1.000 Freq:50.00Hz Lamp Flux:290.402x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010024
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

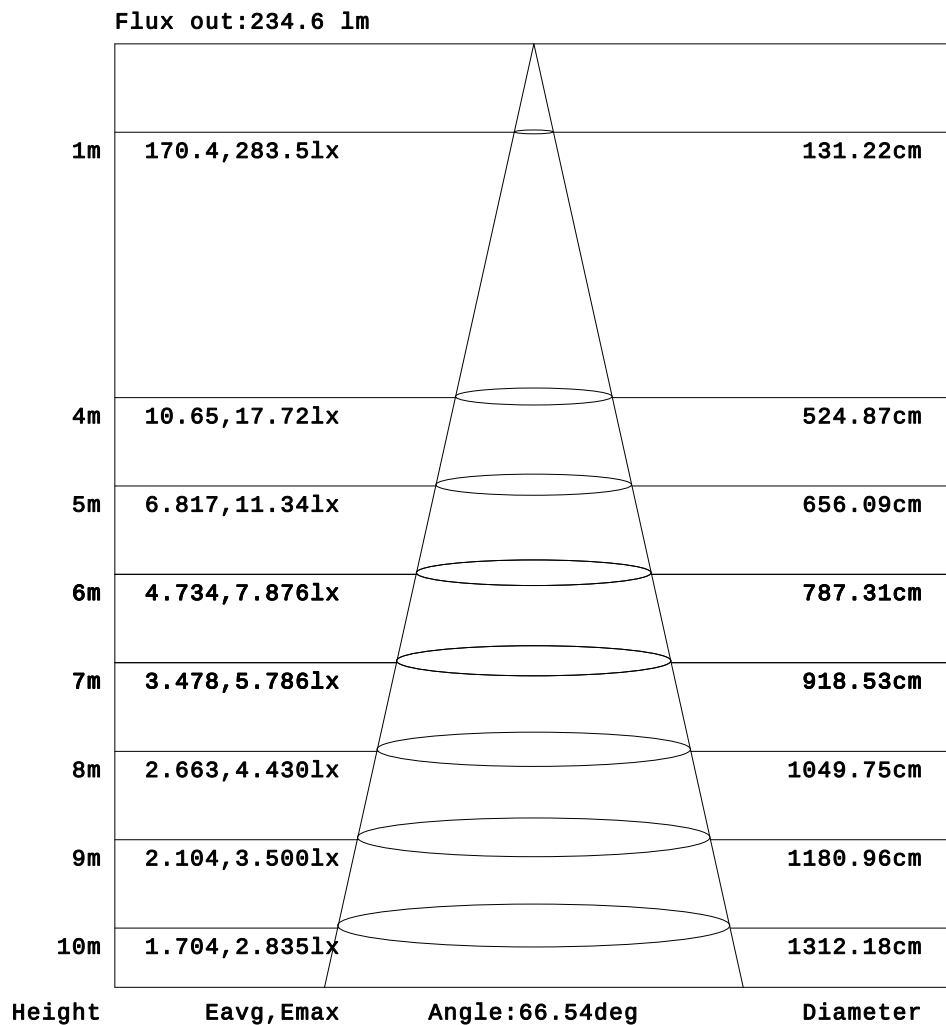

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.0522A P:6.219W PF:1.000 Freq:50.00Hz Lamp Flux:290.402x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010024
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	6.38	12.5	17.7	20.4	19.9
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	12.8	25.0	35.3	40.7	39.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.31	25.1	49.3	74.1	92.2	104	110	109
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12.6	50.1	97.4	136	159	173	180	178
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12.9	50.2	101	144	175	197	209	214	213
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	25.8	87.8	151	190	215	234	245	249	248
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.69	46.8	117	174	210	234	250	259	262	260
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.38	67.9	147	197	230	252	266	273	274	273
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	13.8	77.5	157	204	237	259	271	277	279	278
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	18.2	87.2	166	212	244	265	277	282	283	284
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	13.8	77.7	157	205	239	261	273	279	282	282
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.41	68.2	148	199	233	256	270	277	280	280
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.71	48.0	120	179	216	240	256	264	268	269
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	27.8	92.6	159	199	225	241	252	257	257
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	13.9	53.9	108	153	187	208	220	225	224
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	15.3	56.1	108	149	174	188	193	192
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.65	28.0	55.3	82.6	102	115	121	120
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.83	15.8	30.0	42.1	48.6	48.4
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.42	7.90	15.0	21.0	24.3	24.2
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-01-14

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.0522A P:6.219W PF:1.000 Freq:50.00Hz Lamp Flux:290.402x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010024
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	16.4	10.8	4.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	32.9	21.5	8.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	101	87.0	68.4	46.0	23.9	5.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	169	152	128	91.9	47.7	11.7	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	204	189	167	135	94.9	47.9	12.1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	240	226	206	179	142	84.0	24.2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	255	243	225	199	164	114	48.6	6.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	269	260	244	220	186	143	73.0	12.2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	275	267	252	228	194	152	83.1	17.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	282	274	259	236	202	160	93.2	22.4	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	280	272	256	232	198	154	85.2	18.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	278	269	253	229	194	149	77.2	14.9	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	265	254	237	211	174	121	53.3	7.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	252	240	220	193	154	92.5	29.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	218	204	181	148	105	54.5	14.7	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	184	167	142	104	56.7	16.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	112	97.6	77.8	52.3	28.4	8.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	40.6	27.9	13.3	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	20.3	13.9	6.64	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: