

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	967.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	86.6V x 86.9H
	At 50% of Imax	64.1V x 66.5H
	At 90% of Imax	40.9V x 43.4H

Beam Flux	Total	996.6 lumens per klm.
	To 10% of Imax	968.0 lumens per klm.
	To 50% of Imax	776.6 lumens per klm.
	To 90% of Imax	362.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.0V I:0.0524A P:6.196W PF:1.000 Freq:50.00Hz Lamp Flux:250.209x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

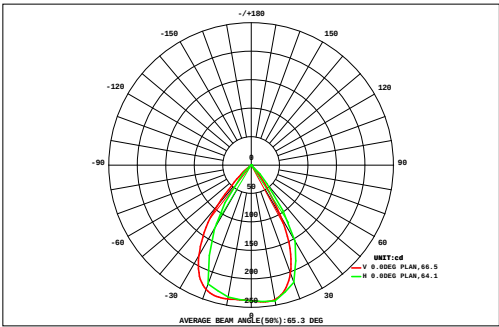

DATA OF LAMP		Eff:40.38lm/W	
MODEL LLS-OP-W30B-L3-DIM	Imax(cd)	242.2	
NOMINAL POWER(W)	6	AVAILABILITY(%)	97.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	243.8
NOMINAL FLUX(lm)	250.209	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	250.2
TEST VOLTAGE(V)	220	θ @50%(H,V)	67,64DEG


AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.09	0.08	0.05	0.01	0.00	0.00	0.00	0.00	0.35	0.00
40	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.22	0.33	0.40	0.37	0.27	0.15	0.06	0.00	0.00	0.00	1.93	0.69
32	0.00	0.00	0.00	0.00	0.01	0.15	0.42	0.77	1.08	1.22	1.15	0.90	0.57	0.24	0.05	0.00	0.00	6.57	5.78
24	0.00	0.00	0.00	0.00	0.10	0.50	1.10	2.02	2.73	2.94	2.77	2.25	1.41	0.64	0.21	0.00	0.00	16.7	16.3
16	0.00	0.00	0.00	0.00	0.31	1.10	2.53	3.60	4.17	4.34	4.15	3.60	2.68	1.40	0.45	0.04	0.00	28.4	28.1
8	0.00	0.00	0.00	0.01	0.45	1.60	3.16	4.16	4.56	4.61	4.49	4.10	3.25	1.98	0.69	0.10	0.00	33.1	32.9
0	0.00	0.00	0.00	0.01	0.56	1.98	3.54	4.41	4.67	4.62	4.55	4.27	3.47	2.23	0.82	0.12	0.00	35.3	35.1
-8	0.00	0.00	0.00	0.03	0.65	2.15	3.64	4.48	4.69	4.64	4.56	4.23	3.39	2.12	0.75	0.10	0.00	35.4	35.3
-16	0.00	0.00	0.00	0.02	0.52	1.82	3.32	4.27	4.65	4.68	4.52	4.06	3.16	1.87	0.61	0.07	0.00	33.6	33.4
-24	0.00	0.00	0.00	0.00	0.28	1.14	2.60	3.63	4.15	4.28	4.08	3.53	2.60	1.34	0.40	0.04	0.00	28.1	27.8
-32	0.00	0.00	0.00	0.00	0.12	0.59	1.44	2.47	3.12	3.34	3.16	2.58	1.64	0.72	0.22	0.01	0.00	19.4	19.0
-40	0.00	0.00	0.00	0.00	0.04	0.22	0.56	1.20	1.67	1.86	1.73	1.31	0.70	0.24	0.07	0.00	0.00	9.62	8.95
-48	0.00	0.00	0.00	0.00	0.00	0.03	0.12	0.19	0.27	0.34	0.30	0.20	0.12	0.06	0.00	0.00	0.00	1.64	0.47
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.04	0.02	0.01	0.01	0.00	0.00	0.16	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																			
Φ t	0.00	0.00	0.00	0.06	3.03	11.3	22.5	31.5	36.2	37.4	36.0	31.4	23.1	12.9	4.28	0.50	0.00	250	---
Φ a	0.00	0.00	0.00	0.00	2.28	10.7	22.0	31.0	35.7	37.0	35.5	30.9	22.7	12.4	3.57	0.08	0.00	---	244

one-half-peak spread: U:23.2,D:41.1 , L:21.9,R:24.9 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-07
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.0V I:0.0524A P:6.196W PF:1.000 Freq:50.00Hz Lamp Flux:250.209x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

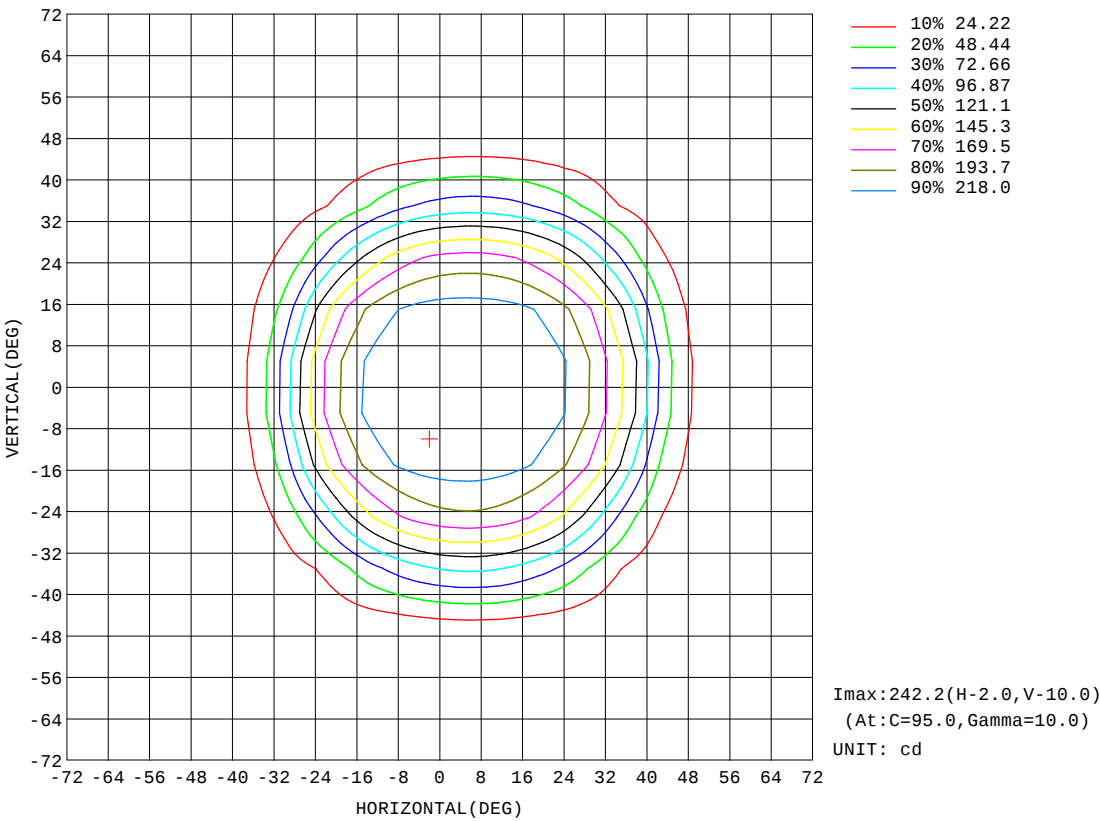


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:221.0V I:0.0524A P:6.196W PF:1.000 Freq:50.00Hz Lamp Flux:250.209x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

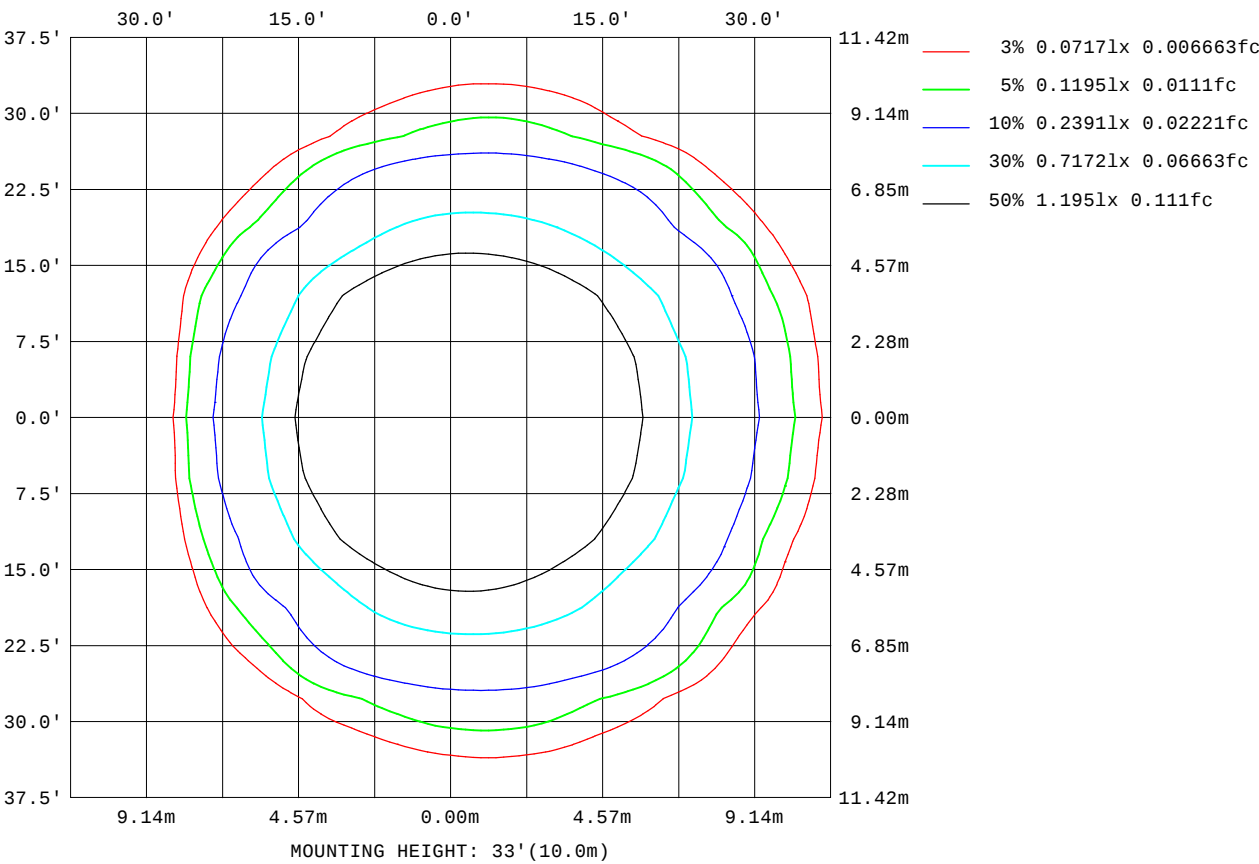

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

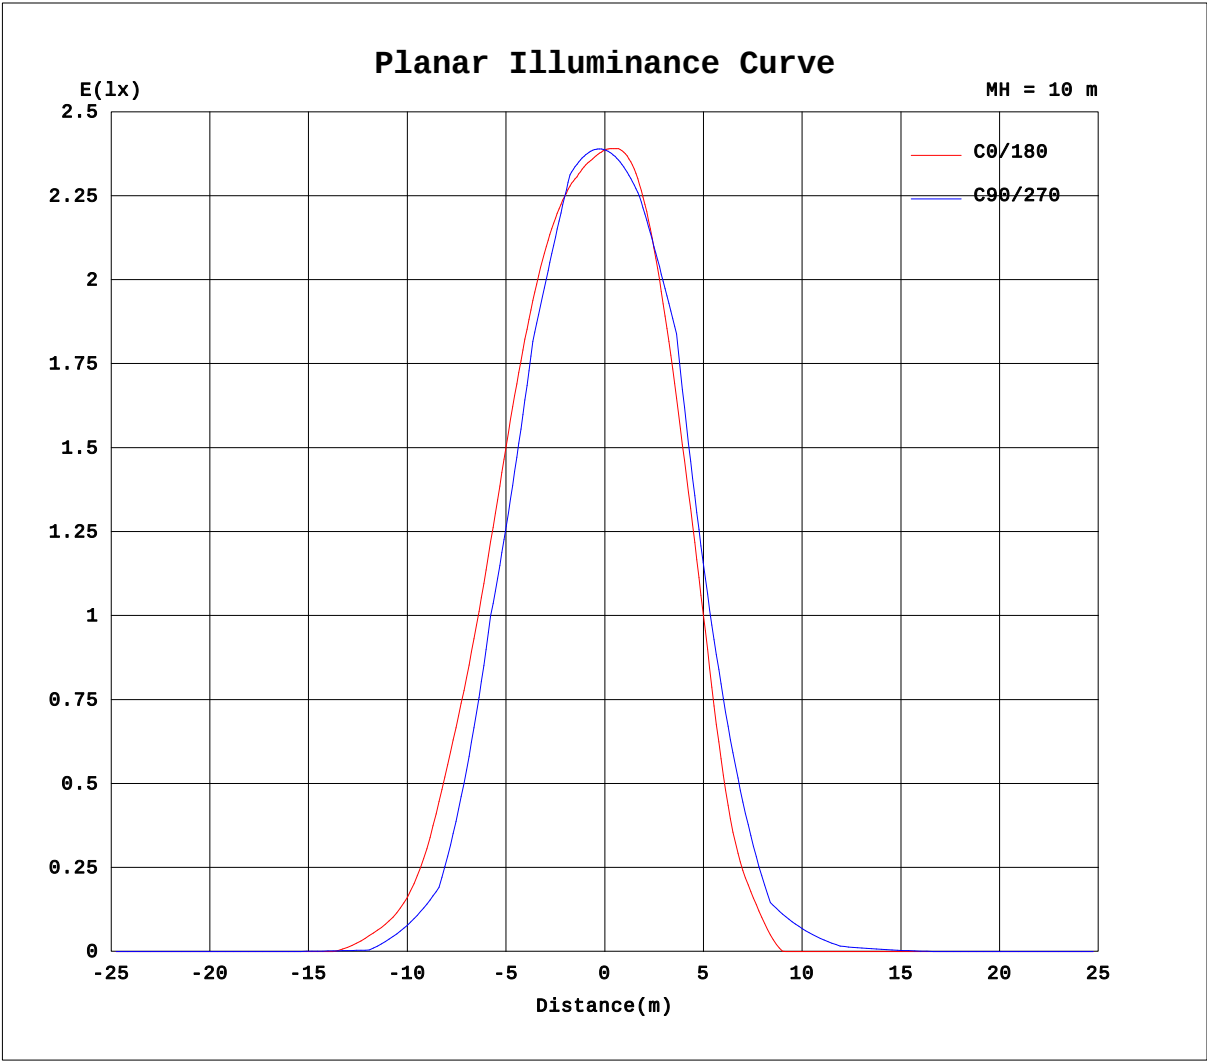


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.0V I:0.0524A P:6.196W PF:1.000 Freq:50.00Hz Lamp Flux:250.209x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

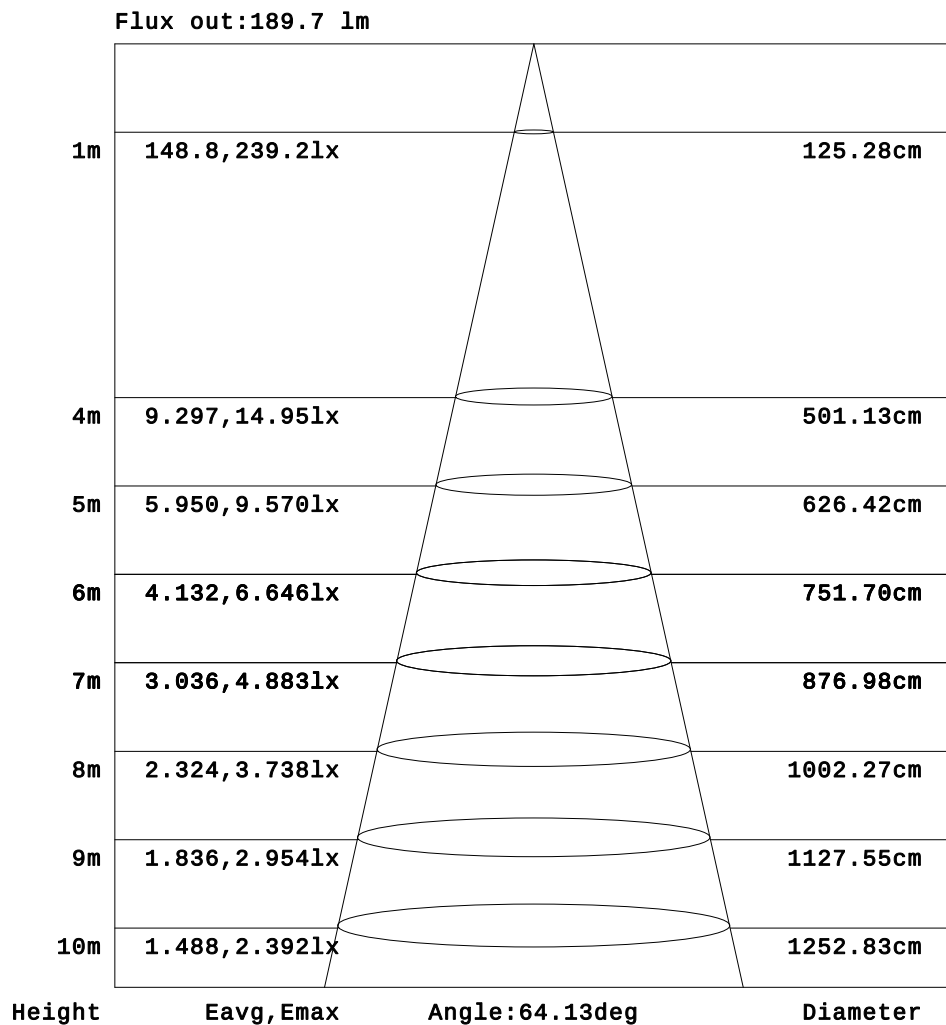

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.0V I:0.0524A P:6.196W PF:1.000 Freq:50.00Hz Lamp Flux:250.209x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	0.93
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.52	2.01
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	4.50	7.91	11.9	14.9	18.8	22.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.58	10.3	17.4	25.1	31.1	37.5	43.0
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.43	11.6	22.1	37.2	58.1	75.7	89.2	97.8
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.97	24.3	38.2	65.2	99.2	126	145	155
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	13.1	33.3	63.2	99.2	133	159	177	186
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	25.8	52.2	102	148	180	201	213	219
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.50	28.5	60.9	114	161	194	215	226	230
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.8	41.7	88.8	148	189	218	235	241	242
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.53	38.2	83.4	145	188	218	235	241	241
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	14.5	47.7	103	162	202	228	240	241	238
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.17	37.8	81.5	142	187	216	233	238	237
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.91	40.8	84.3	144	185	213	230	235	235
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.14	28.7	58.2	108	156	190	212	224	228
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.82	27.0	48.9	93.8	143	178	201	215	222
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12.5	30.6	56.2	89.6	121	147	165	175
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.16	20.2	31.2	49.3	75.1	102	121	130
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.29	9.01	17.3	28.4	43.6	59.9	72.8	80.5
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	7.19	13.1	18.8	24.0	28.9	33.0
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.91	6.00	9.39	13.4	16.6	19.3
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.66	4.11	5.46	6.46
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	1.91	2.58	3.16
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-01-07

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.0V I:0.0524A P:6.196W PF:1.000 Freq:50.00Hz Lamp Flux:250.209x1 lm		
NAME: 8.02.019.0106 90° LLS-OP-W30B-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010013
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	1.43	1.17	1.27	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	2.85	2.35	2.45	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	23.8	23.2	20.7	16.6	12.9	9.26	6.04	2.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	45.0	43.5	37.3	31.3	24.3	17.3	10.6	3.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	101	99.4	91.7	79.7	62.9	42.5	24.5	14.0	5.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	157	153	142	123	93.5	59.7	32.9	20.4	8.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	189	187	177	161	136	103	67.6	36.5	17.2	3.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	221	217	208	191	167	133	88.0	42.8	20.7	3.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	231	229	223	211	191	160	119	69.6	32.4	11.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	242	240	236	225	204	172	131	77.1	35.0	10.9	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	240	240	238	231	215	186	146	96.9	45.6	18.0	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	237	239	239	233	215	184	144	93.4	42.3	15.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	236	237	237	231	215	187	148	99.9	46.9	18.8	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	235	235	234	225	206	175	136	83.3	36.7	12.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	229	228	224	213	194	164	124	75.0	36.4	13.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	224	220	211	195	171	138	94.7	47.9	25.4	5.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	178	176	169	154	133	104	71.4	39.9	20.3	4.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	133	130	121	106	84.5	56.0	34.9	21.7	8.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	83.9	82.9	77.6	67.8	55.3	38.6	23.4	14.2	5.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	35.4	34.5	31.0	25.1	20.1	13.9	7.91	2.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	20.7	20.6	18.6	15.1	11.0	7.65	4.40	2.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	6.17	6.05	5.13	3.38	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	3.15	3.07	2.68	1.90	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-07

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: