

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	675.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	120.8V x 103.0H
	At 50% of Imax	85.3V x 70.9H
	At 90% of Imax	39.3V x 36.7H

Beam Flux	Total	998.1 lumens per klm.
	To 10% of Imax	973.2 lumens per klm.
	To 50% of Imax	727.7 lumens per klm.
	To 90% of Imax	213.7 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.0524A P:6.227W PF:1.000 Freq:50.00Hz Lamp Flux:214.071x1 lm		
NAME: 8.02.019.0107 LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

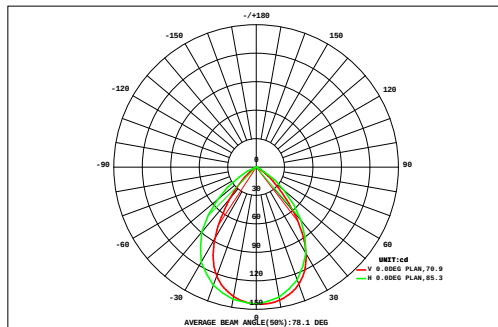

DATA OF LAMP		Eff:34.38lm/W	
MODEL LLS-OP-W30B-L3-DIM		Imax(cd)	144.5
NOMINAL POWER(W)	6	AVAILABILITY(%)	97.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	209.4
NOMINAL FLUX(lm)	214.071	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	214.1
TEST VOLTAGE(V)	220	θ @50%(H,V)	71,85DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.17	0.23	0.22	0.15	0.06	0.00	0.00	0.00	0.00	0.00	0.91	0.33
60	0.00	0.00	0.00	0.00	0.02	0.15	0.48	0.85	1.06	1.02	0.74	0.36	0.09	0.00	0.00	0.00	0.00	4.78	4.25
50	0.00	0.00	0.00	0.00	0.13	0.56	1.21	1.83	2.14	2.08	1.67	1.02	0.41	0.06	0.00	0.00	0.00	11.1	10.8
40	0.00	0.00	0.00	0.03	0.35	1.04	2.01	2.79	3.13	3.07	2.61	1.76	0.83	0.23	0.01	0.00	0.00	17.9	17.6
30	0.00	0.00	0.00	0.10	0.56	1.50	2.66	3.45	3.79	3.74	3.31	2.42	1.25	0.41	0.04	0.00	0.00	23.2	23.0
	0.00	0.00	0.00	0.16	0.74	1.86	3.09	3.85	4.17	4.12	3.71	2.83	1.54	0.55	0.08	0.00	0.00	26.7	26.5
	0.00	0.00	0.00	0.19	0.82	2.03	3.26	4.02	4.35	4.30	3.88	3.00	1.68	0.61	0.10	0.00	0.00	28.2	28.1
	0.00	0.00	0.00	0.19	0.81	2.00	3.22	3.98	4.31	4.27	3.83	2.94	1.63	0.59	0.09	0.00	0.00	27.9	27.7
	0.00	0.00	0.00	0.15	0.69	1.76	2.94	3.70	4.04	3.99	3.56	2.66	1.42	0.49	0.06	0.00	0.00	25.5	25.3
	0.00	0.00	0.00	0.08	0.50	1.37	2.44	3.19	3.52	3.47	3.03	2.14	1.05	0.33	0.02	0.00	0.00	21.1	20.9
-30	0.00	0.00	0.00	0.03	0.28	0.88	1.73	2.42	2.73	2.67	2.23	1.44	0.63	0.15	0.00	0.00	0.00	15.2	14.9
-40	0.00	0.00	0.00	0.00	0.09	0.41	0.94	1.46	1.71	1.64	1.26	0.70	0.23	0.02	0.00	0.00	0.00	8.46	8.07
-50	0.00	0.00	0.00	0.00	0.08	0.29	0.55	0.69	0.64	0.42	0.16	0.03	0.00	0.00	0.00	0.00	0.00	2.86	2.04
-60	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.08	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90		
Φ t	0.00	0.00	0.01	0.94	4.98	13.7	24.4	32.3	35.9	35.3	30.4	21.5	10.8	3.44	0.40	0.00	0.00	214	---
Φ a	0.00	0.00	0.00	0.32	4.50	13.3	24.0	32.0	35.7	35.1	30.0	21.2	10.4	2.82	0.02	0.00	0.00	---	209

one-half-peak spread: U:40.7,D:45.0 , L:34.7,R:36.5


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.7V I:0.0524A P:6.227W PF:1.000 Freq:50.00Hz Lamp Flux:214.07lx1 lm		
NAME: 8.02.019.0107 LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

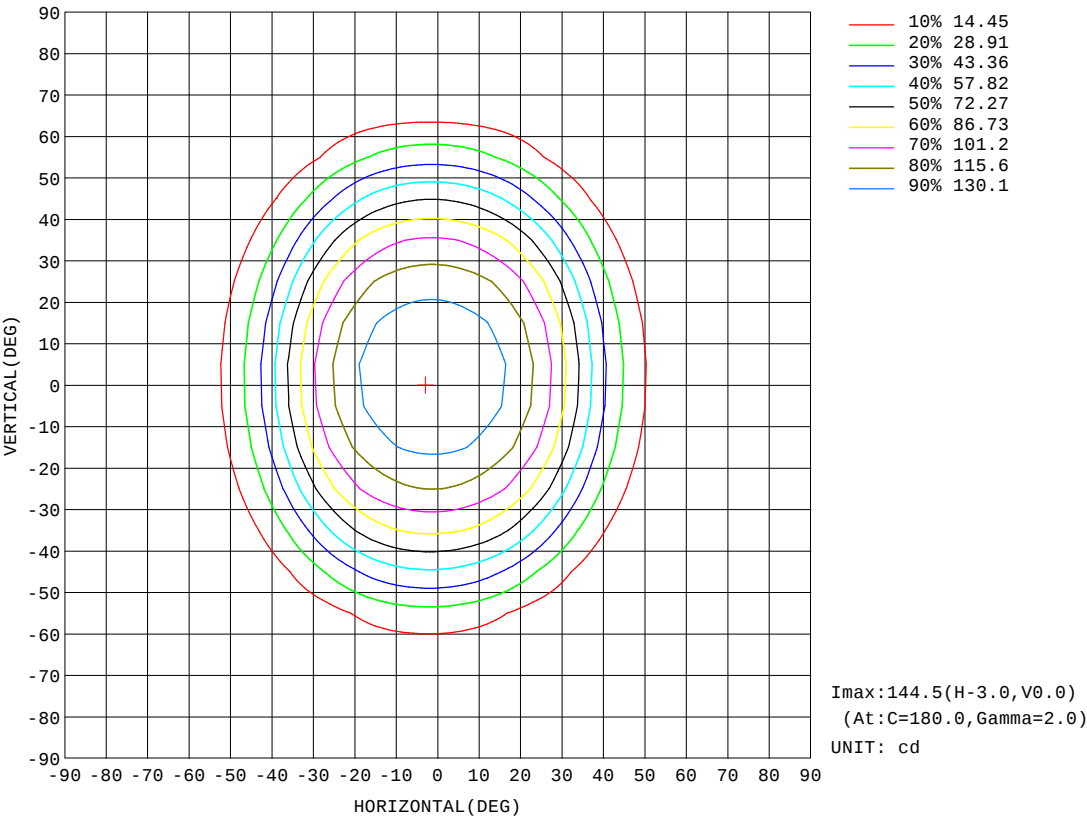


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.7V I:0.0524A P:6.227W PF:1.000 Freq:50.00Hz Lamp Flux:214.07lx 1m		
NAME: 8.02.019.0107 LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

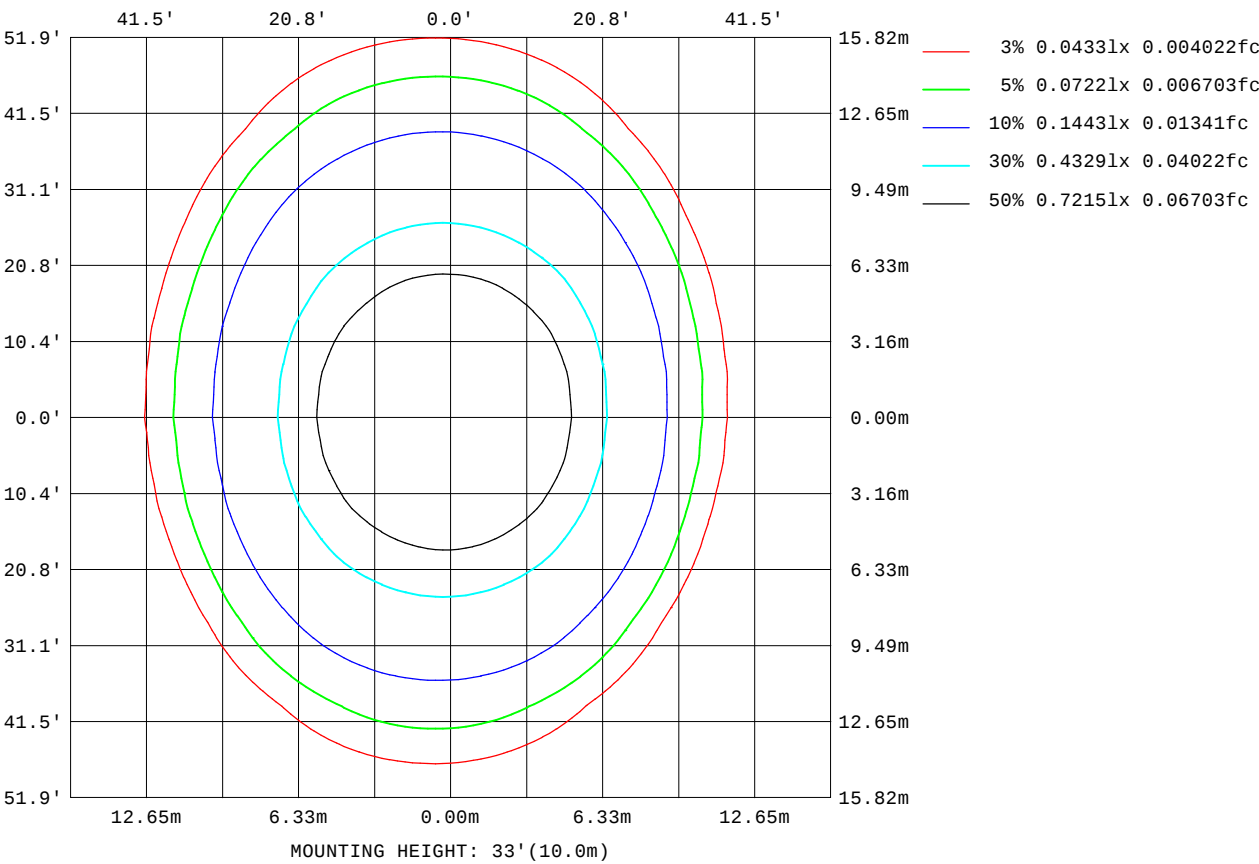

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

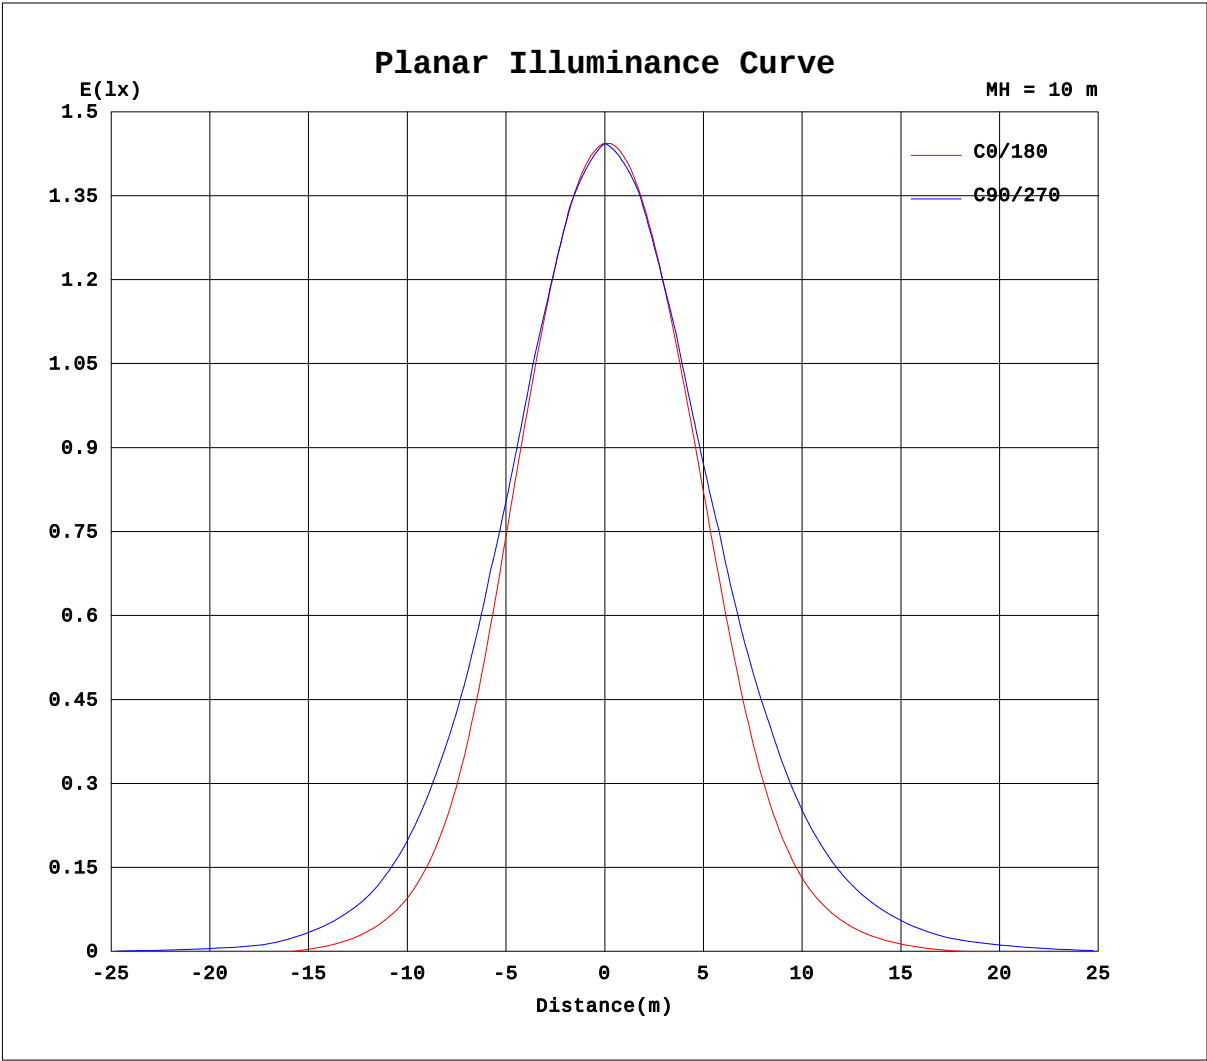


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.7V I:0.0524A P:6.227W PF:1.000 Freq:50.00Hz Lamp Flux:214.07lx1 lm		
NAME: 8.02.019.0107 LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

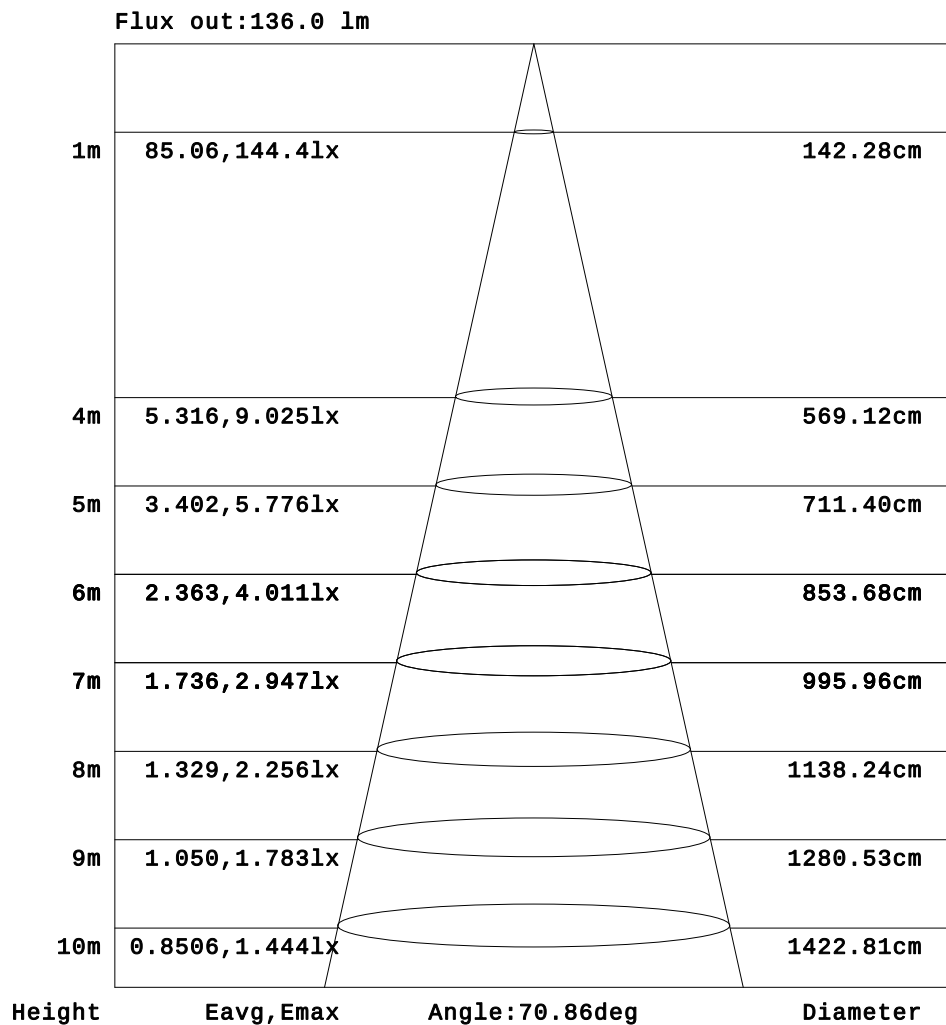

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.0524A P:6.227W PF:1.000 Freq:50.00Hz Lamp Flux:214.071x1 lm		
NAME: 8.02.019.0107 LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	2.22	3.46	4.36	4.84	4.84
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.21	4.97	7.34	8.98	9.74	9.56
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.20	3.73	6.69	10.7	15.4	19.4	22.3	23.9	23.9
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.33	8.59	14.6	21.2	27.6	32.9	36.5	38.2	38.0
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	3.36	8.27	15.5	24.1	33.2	41.8	48.8	53.5	55.9	56.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.59	8.05	15.9	25.7	37.1	48.9	59.2	67.0	71.8	74.0	73.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	3.98	11.4	20.9	32.9	46.9	60.7	72.4	81.0	86.4	89.1	89.6
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.94	8.94	18.1	30.3	45.5	62.3	77.7	89.5	97.6	102	105	105
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.89	10.6	20.8	34.5	51.6	70.0	86.3	98.8	107	113	115	116
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.10	6.61	15.9	28.3	45.0	65.1	84.8	101	112	120	124	126	126
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.25	6.52	16.0	28.8	46.2	67.3	88.0	105	117	125	130	132	133
-10	0.00	0.00	0.00	0.00	0.00	0.00	1.70	9.78	20.6	35.5	55.4	78.2	98.8	115	125	133	137	139	139
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.92	8.76	19.3	33.8	53.5	76.6	98.2	115	127	134	139	141	142
0	0.00	0.00	0.00	0.00	0.00	0.00	2.79	11.5	23.1	39.2	60.6	84.3	105	121	131	138	142	144	144
5	0.00	0.00	0.00	0.00	0.00	0.00	1.06	9.11	19.8	34.6	54.7	78.1	99.9	117	128	136	140	143	143
10	0.00	0.00	0.00	0.00	0.00	0.00	2.21	10.5	21.7	37.2	57.8	81.2	102	118	129	136	140	142	142
15	0.00	0.00	0.00	0.00	0.00	0.00	0.39	7.52	17.5	31.0	49.3	71.5	93.0	110	122	130	135	137	137
20	0.00	0.00	0.00	0.00	0.00	0.00	0.60	8.03	17.9	31.4	49.4	70.7	91.2	107	119	126	130	132	133
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.37	12.7	23.9	38.9	57.8	77.6	94.8	108	116	121	124	124
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.72	11.4	21.8	35.5	52.8	71.5	88.0	100	109	114	116	116
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.19	6.59	14.9	25.8	39.9	56.0	71.7	84.6	93.7	99.4	102	103
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.63	11.8	21.2	33.2	47.1	61.1	73.1	81.5	86.8	89.2	89.2
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	5.74	12.8	21.8	32.5	43.9	54.5	62.7	68.2	71.1	71.6
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.18	7.71	14.5	22.5	31.2	39.6	46.5	51.2	53.6	53.6
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	3.26	6.65	12.2	18.7	25.1	30.6	34.5	36.7	37.1
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	4.37	8.87	13.0	16.5	19.0	20.3	20.3
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	1.79	4.02	6.08	7.93	9.32	10.1	10.2
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.0524A P:6.227W PF:1.000 Freq:50.00Hz Lamp Flux:214.071x1 lm		
NAME: 8.02.019.0107 LLS-OP-W30B-L3-DIM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025010025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	4.36	3.46	2.24	0.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	8.44	6.48	3.94	1.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	22.6	19.9	16.1	11.5	7.41	4.35	1.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	35.9	31.9	26.4	20.0	13.5	7.57	2.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	54.2	50.1	43.9	35.8	26.8	18.0	10.3	4.54	1.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	71.3	66.2	58.3	48.1	36.5	25.2	15.5	7.65	1.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	87.7	83.3	76.1	65.9	52.9	39.0	26.0	15.3	6.96	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	103	98.0	90.2	78.8	63.9	47.3	31.9	19.3	9.64	2.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	114	110	103	93.0	78.6	61.0	43.0	27.4	15.4	6.33	0.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	124	120	113	102	86.7	67.3	47.3	30.2	17.1	7.35	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	131	128	121	112	97.7	78.8	57.5	38.0	22.8	11.4	2.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	137	133	127	117	102	81.9	59.4	39.1	23.3	11.6	2.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	140	137	131	122	108	89.1	66.5	44.7	27.4	14.5	4.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	142	138	132	122	108	87.6	64.3	42.7	25.7	13.2	3.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	142	138	132	123	110	91.1	68.2	45.9	28.3	15.1	5.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	140	136	130	120	106	85.8	62.8	41.2	25.0	12.7	3.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	136	132	126	117	104	84.8	62.7	41.7	25.3	13.1	3.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	131	127	120	110	95.1	75.3	53.7	34.8	20.2	9.44	1.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	123	119	113	103	88.7	70.4	50.5	32.8	19.1	8.84	1.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	114	109	102	90.8	75.7	57.6	39.8	24.8	13.4	4.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	101	96.6	89.5	79.1	65.4	49.6	34.2	21.1	11.0	3.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	86.8	81.6	73.5	62.5	49.0	35.2	22.9	12.9	5.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	69.7	65.4	58.5	49.3	38.5	27.4	17.4	9.07	3.26	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	51.3	46.9	40.2	32.1	23.4	15.2	8.17	2.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	35.6	32.4	27.6	21.6	15.2	9.01	4.74	1.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	18.9	16.3	12.7	8.64	4.44	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	9.64	8.44	6.75	4.74	2.63	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-01-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: