

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1712.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	78.4V x 83.9H
	At 50% of Imax	35.9V x 39.9H
	At 90% of Imax	10.5V x 14.0H
Beam Flux	Total	999.3 lumens per klm.
	To 10% of Imax	875.3 lumens per klm.
	To 50% of Imax	395.6 lumens per klm.
	To 90% of Imax	47.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.0V I:0.3162A P:22.46W PF:0.5917 Lamp Flux:746.015x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010106
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

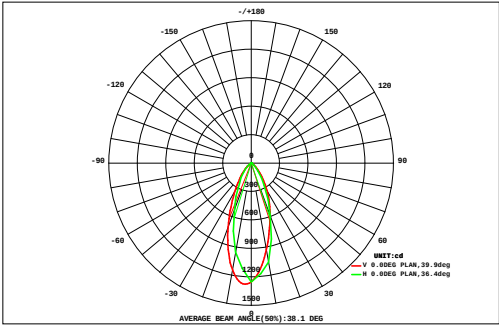

DATA OF LAMP		Eff:33.22lm/W	
LAMP: W30B-L12-RDM (AL)		Imax(cd)	1278
NOMINAL POWER(W)	22	AVAILABILITY(%)	87.7
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	654.6
NOMINAL FLUX(lm)	746.015	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	746.0
TEST VOLTAGE(V)	120.0	θ @50%(H,V)	40,36DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
64	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.13	0.16	0.15	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.67	0.00
56	0.00	0.00	0.00	0.04	0.15	0.30	0.44	0.54	0.58	0.55	0.47	0.37	0.25	0.14	0.04	0.00	0.00	0.00	3.87	0.00
48	0.00	0.00	0.03	0.17	0.43	0.77	1.11	1.37	1.48	1.40	1.21	0.97	0.70	0.42	0.18	0.04	0.00	0.00	10.3	0.00
40	0.00	0.00	0.11	0.42	0.89	1.53	2.23	2.83	3.14	3.01	2.54	1.98	1.40	0.86	0.42	0.13	0.01	0.00	21.5	9.83
32	0.00	0.02	0.24	0.71	1.48	2.58	3.91	5.25	6.04	5.81	4.78	3.59	2.47	1.46	0.72	0.27	0.03	0.00	39.4	33.6
24	0.00	0.06	0.37	1.01	2.21	3.99	6.51	9.47	11.3	10.8	8.51	6.03	3.98	2.26	1.07	0.41	0.08	0.00	68.0	63.8
16	0.00	0.08	0.45	1.23	2.80	5.52	9.76	15.1	18.5	17.5	13.2	8.95	5.65	3.09	1.42	0.54	0.12	0.00	104	100
8	0.00	0.11	0.52	1.39	3.21	6.58	12.1	19.1	23.6	22.0	16.3	10.8	6.70	3.59	1.60	0.60	0.15	0.00	128	125
0	0.00	0.13	0.57	1.48	3.37	6.88	12.7	19.5	23.6	21.6	15.9	10.5	6.49	3.46	1.53	0.57	0.13	0.00	128	125
-8	0.00	0.12	0.52	1.31	2.84	5.39	9.31	14.1	17.1	16.1	12.3	8.41	5.41	3.01	1.40	0.53	0.12	0.00	98.0	94.3
-16	0.00	0.08	0.42	1.03	2.11	3.66	5.74	8.21	9.91	9.72	7.87	5.71	3.93	2.33	1.14	0.45	0.10	0.00	62.4	58.0
-24	0.00	0.04	0.30	0.78	1.52	2.54	3.71	4.91	5.70	5.63	4.75	3.65	2.63	1.64	0.84	0.33	0.06	0.00	39.0	33.2
-32	0.00	0.02	0.18	0.54	1.04	1.69	2.33	2.82	3.07	2.98	2.60	2.13	1.58	1.00	0.52	0.19	0.02	0.00	22.7	11.8
-40	0.00	0.00	0.08	0.32	0.65	1.04	1.40	1.60	1.64	1.55	1.38	1.15	0.84	0.52	0.24	0.05	0.00	0.00	12.5	0.00
-48	0.00	0.00	0.00	0.09	0.28	0.48	0.63	0.73	0.75	0.71	0.62	0.49	0.34	0.19	0.06	0.01	0.00	0.00	5.38	0.00
-56	0.00	0.00	0.00	0.01	0.03	0.09	0.16	0.22	0.24	0.22	0.18	0.12	0.06	0.03	0.02	0.00	0.00	0.00	1.39	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.19	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.00	0.66	3.78	10.5	23.0	43.1	72.1	106	127	120	92.7	65.0	42.4	24.0	11.2	4.11	0.82	0.01	746	---
Φ a	0.00	0.00	0.00	0.87	15.2	36.4	66.1	100	121	114	86.7	59.0	36.3	17.0	1.82	0.00	0.00	0.00	---	655


one-half-peak spread: U:17.2,D:19.0 , L:18.9,R:21.3 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.3162A P:22.46W PF:0.5917 Lamp Flux:746.015x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010106
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

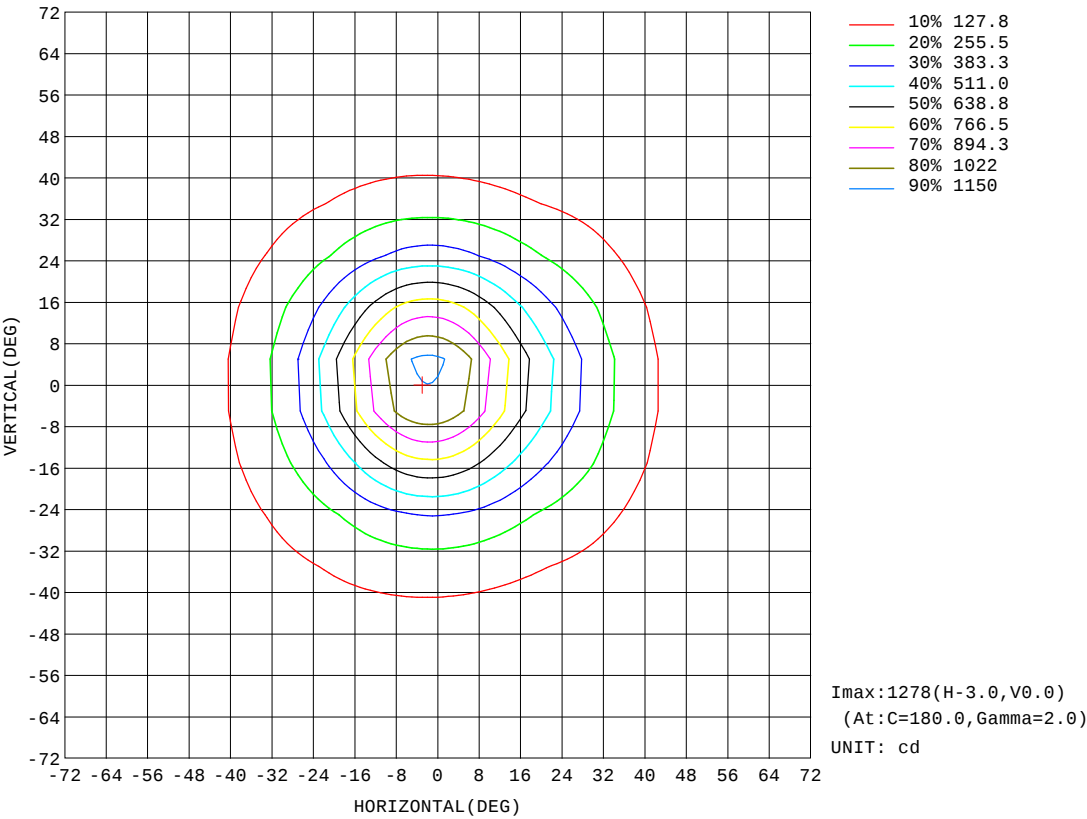


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.3162A P:22.46W PF:0.5917 Lamp Flux:746.015x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010106
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

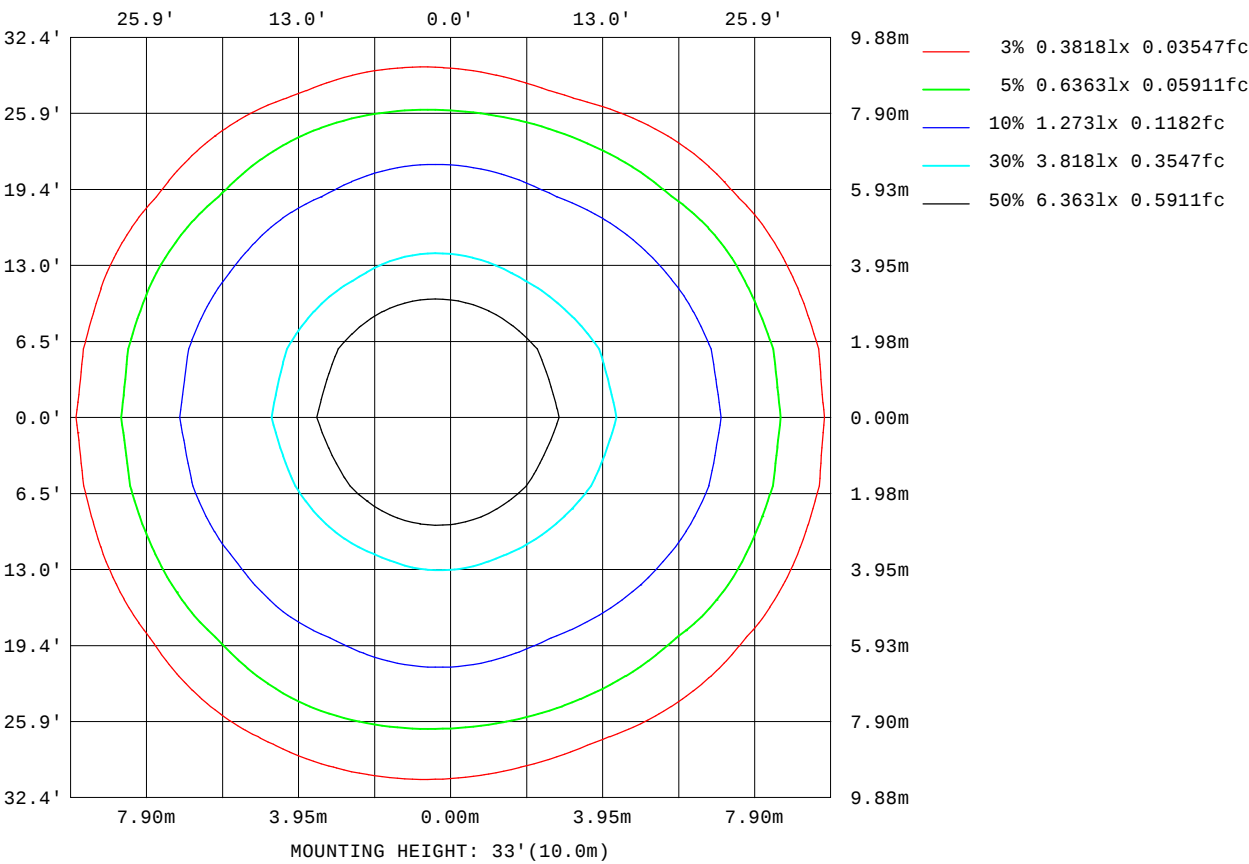


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.0V I:0.3162A P:22.46W PF:0.5917 Lamp Flux:746.015x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010106
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

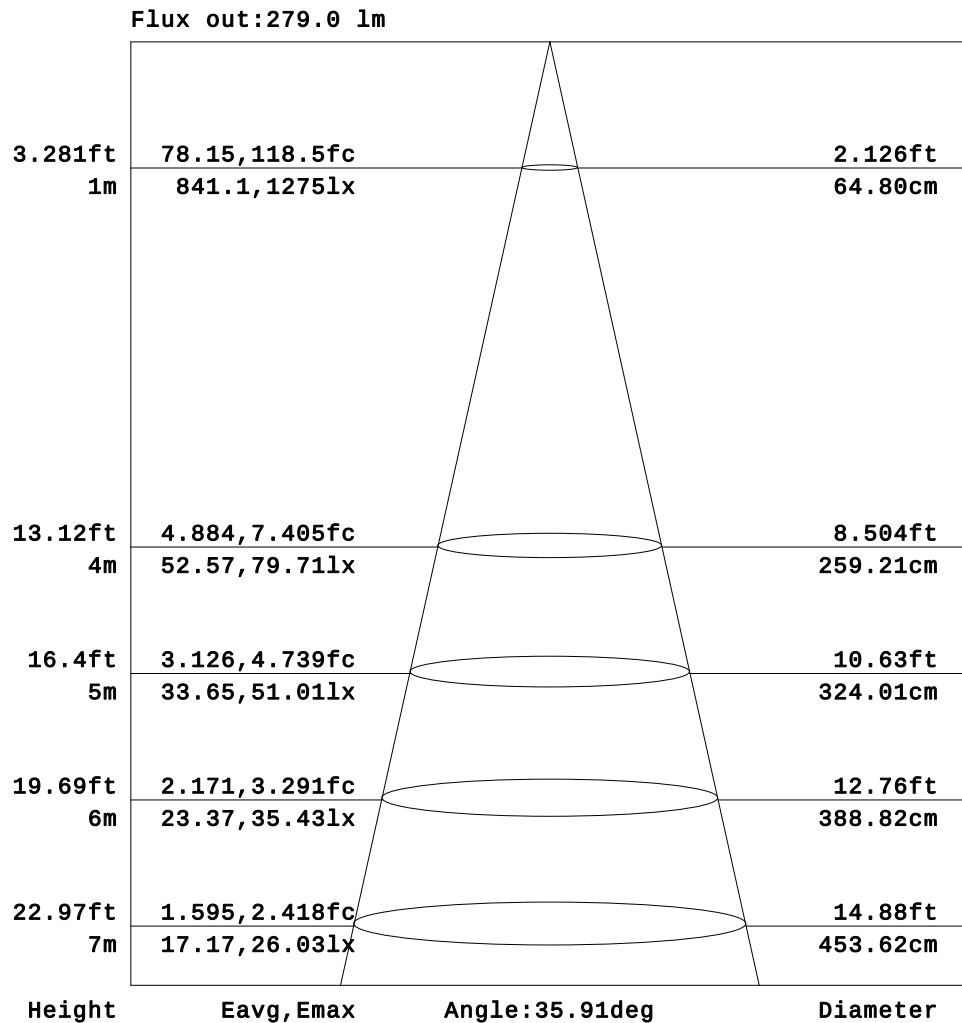


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

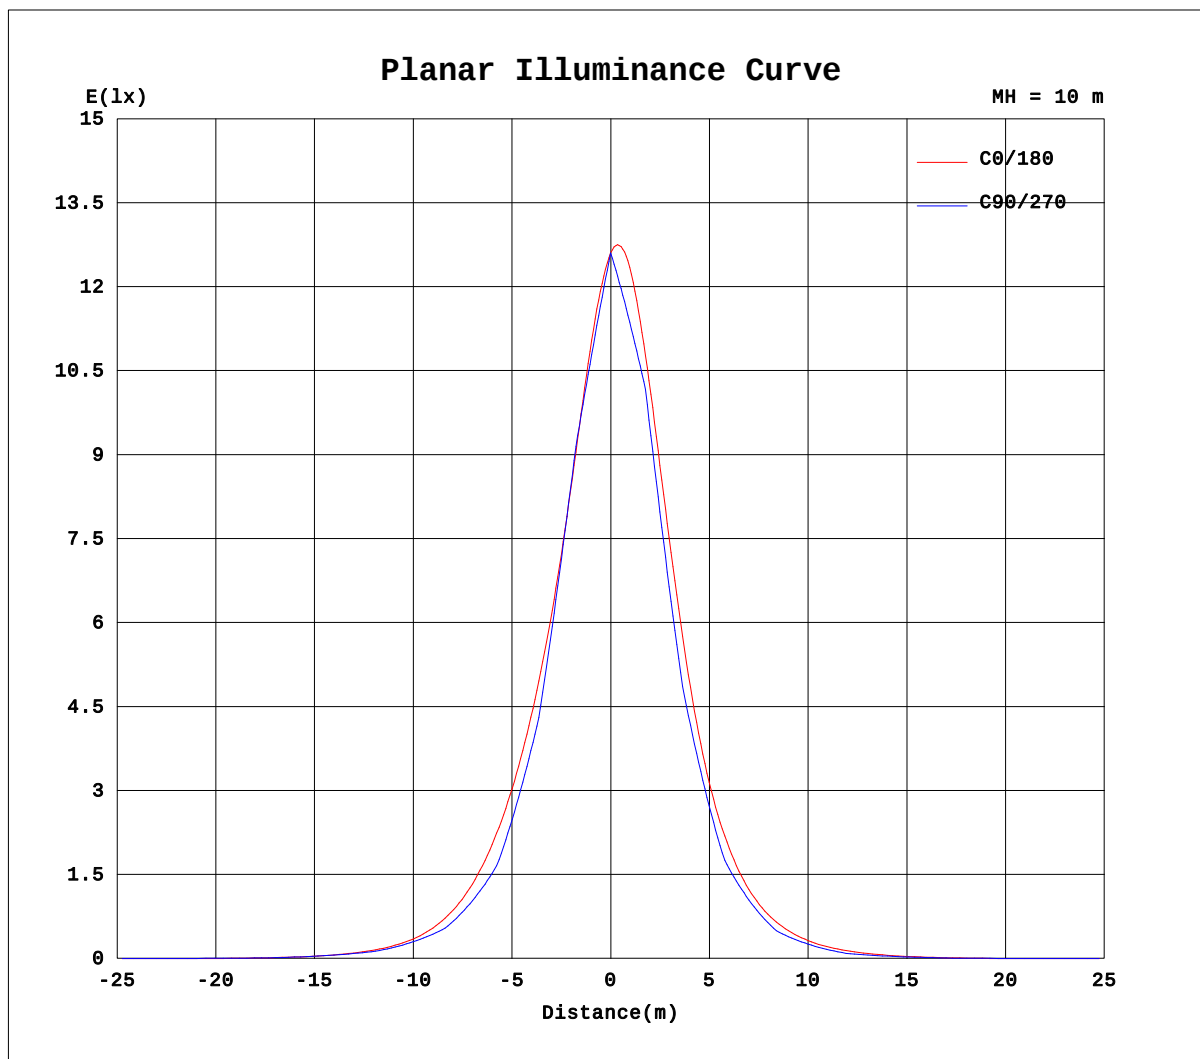

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2024-01-25

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.3162A P:22.46W PF:0.5917 Lamp Flux:746.015x1 lm			
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)		TYPE:LED	WEIGHT:
DIM.:		SPEC.:	SERIAL No.:2024010106
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		SUR.:	PROTECTION ANGLE:

Table--1																		UNIT: cd	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	1.48	2.97	4.28	5.29	5.95	6.19	6.07
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	3.58	6.50	9.02	10.9	12.1	12.4	12.0
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.27	7.43	11.9	17.4	22.3	26.3	29.2	31.1	31.6	31.2
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	8.09	16.6	25.5	33.2	39.9	45.0	48.5	50.6	50.8	49.9
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	6.54	16.1	27.3	39.1	51.0	62.5	72.4	79.7	84.5	86.6	86.0
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.39	15.5	28.5	42.6	57.5	73.6	89.5	103	113	120	123	121
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.43	7.34	20.4	35.6	52.9	72.9	95.3	118	140	160	176	187	189
-30	0.00	0.00	0.00	0.00	0.00	0.00	2.85	15.0	31.0	49.2	70.8	96.9	126	156	186	214	238	253	255
-25	0.00	0.00	0.00	0.00	0.00	0.00	3.53	16.9	34.5	55.2	81.7	115	155	197	246	298	346	379	388
-20	0.00	0.00	0.00	0.00	0.00	0.00	8.82	25.3	45.6	70.7	105	149	200	257	327	402	470	513	518
-15	0.00	0.00	0.00	0.00	0.00	0.00	7.70	24.1	45.3	72.5	111	164	231	313	416	535	649	726	740
-10	0.00	0.00	0.00	0.00	0.00	0.44	12.2	30.7	54.5	87.7	136	203	292	406	552	717	866	954	954
-5	0.00	0.00	0.00	0.00	0.00	0.00	9.49	27.1	50.7	83.5	132	202	299	427	596	791	975	1098	1114
0	0.00	0.00	0.00	0.00	0.00	0.63	12.8	32.0	58.0	96.1	152	235	351	510	717	942	1145	1267	1252
5	0.00	0.00	0.00	0.00	0.00	0.00	8.65	25.7	49.5	83.0	133	206	307	443	621	826	1022	1152	1168
10	0.00	0.00	0.00	0.00	0.00	0.01	10.2	27.9	52.2	87.2	139	212	311	440	605	792	964	1064	1059
15	0.00	0.00	0.00	0.00	0.00	0.00	5.68	20.3	41.3	69.9	111	170	244	337	457	595	728	815	828
20	0.00	0.00	0.00	0.00	0.00	0.00	6.00	20.1	40.3	67.1	105	154	211	278	361	452	536	584	584
25	0.00	0.00	0.00	0.00	0.00	0.00	1.93	12.2	28.1	49.3	77.6	114	158	206	264	326	385	423	429
30	0.00	0.00	0.00	0.00	0.00	0.00	0.54	9.80	23.5	41.6	63.7	90.9	122	156	191	224	253	269	270
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.90	13.9	27.4	44.0	63.9	86.7	111	135	158	178	190	191
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.12	9.14	19.3	31.6	45.4	60.5	75.8	89.9	101	109	113	111
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	3.68	9.62	18.3	28.2	38.7	49.2	59.0	66.6	72.2	74.7	73.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.22	8.83	15.0	21.2	26.7	31.5	34.8	36.7	37.1	36.2
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.08	3.83	6.89	10.1	13.8	17.2	19.9	21.8	22.6	22.4
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.45	2.34	4.10	5.87	7.41	8.26	8.30
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.99	1.88	2.76	4.17	4.08	4.18
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.14	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.60	0.01	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.3162A P:22.46W PF:0.5917 Lamp Flux:746.015x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010106
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	5.56	4.72	3.68	2.52	1.34	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	10.8	9.05	6.90	4.57	2.20	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	29.7	27.3	24.3	20.9	17.1	13.0	9.64	6.29	3.03	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	47.7	44.5	40.4	35.7	30.3	24.4	17.9	11.3	4.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	82.7	77.4	71.1	63.9	55.5	45.9	35.7	25.5	15.8	7.22	2.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	116	108	99.1	89.0	76.9	63.4	49.3	35.8	23.1	12.0	2.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	182	168	151	133	115	95.6	75.2	55.5	37.8	22.5	10.1	1.97	0.00	0.00	0.00	0.00	0.00	0.00
-30	243	221	195	170	146	120	92.9	68.0	46.1	27.6	13.1	1.97	0.00	0.00	0.00	0.00	0.00	0.00
-25	371	333	287	243	205	167	129	92.6	62.7	39.0	20.6	6.82	0.00	0.00	0.00	0.00	0.00	0.00
-20	486	427	361	300	249	199	149	104	69.1	42.1	21.9	7.18	0.00	0.00	0.00	0.00	0.00	0.00
-15	693	602	498	405	328	258	191	132	86.6	53.3	29.2	12.0	0.58	0.00	0.00	0.00	0.00	0.00
-10	869	735	597	477	377	287	207	139	89.0	53.5	28.8	11.2	0.05	0.00	0.00	0.00	0.00	0.00
-5	1022	865	699	556	436	331	237	160	101	61.4	33.9	14.7	1.38	0.00	0.00	0.00	0.00	0.00
0	1120	927	740	583	450	335	234	154	95.4	56.5	30.2	12.0	0.27	0.00	0.00	0.00	0.00	0.00
5	1069	900	724	574	446	337	240	160	101	60.8	33.4	14.4	1.25	0.00	0.00	0.00	0.00	0.00
10	957	800	643	511	397	299	210	140	88.1	52.4	27.9	10.6	0.00	0.00	0.00	0.00	0.00	0.00
15	769	660	541	436	345	266	193	131	84.4	51.2	27.7	11.1	0.45	0.00	0.00	0.00	0.00	0.00
20	542	472	394	322	260	203	148	101	65.5	39.2	20.0	6.08	0.00	0.00	0.00	0.00	0.00	0.00
25	406	361	307	256	210	167	125	87.7	58.3	35.5	18.3	5.54	0.00	0.00	0.00	0.00	0.00	0.00
30	255	229	199	171	143	114	86.2	61.5	40.9	24.0	10.9	0.81	0.00	0.00	0.00	0.00	0.00	0.00
35	182	166	146	127	108	87.4	67.1	48.6	32.5	18.9	7.89	1.27	0.00	0.00	0.00	0.00	0.00	0.00
40	104	95.3	85.4	75.6	64.4	52.4	40.3	28.9	18.2	8.89	1.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	70.2	64.7	58.4	51.9	44.5	36.4	27.9	19.6	11.7	5.32	1.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	34.2	31.7	28.9	25.4	21.4	17.0	12.2	7.20	2.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	21.1	19.1	16.8	14.2	11.5	8.95	6.57	4.08	1.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.33	5.70	3.78	1.97	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.79	3.03	2.08	1.16	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: