

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2440.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	71.1V x 64.1H
	At 50% of Imax	31.9V x 31.8H
	At 90% of Imax	8.5V x 11.8H
Beam Flux	Total	998.9 lumens per klm.
	To 10% of Imax	869.6 lumens per klm.
	To 50% of Imax	410.0 lumens per klm.
	To 90% of Imax	46.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.1195A P:7.751W PF:0.5396 Lamp Flux:296.503x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010108
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

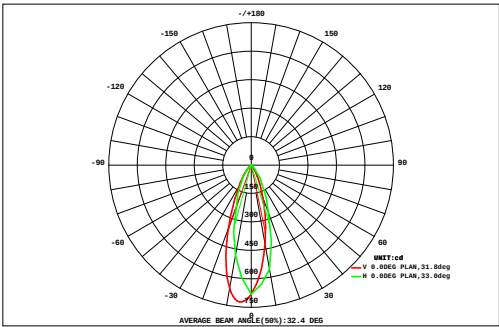

DATA OF LAMP		Eff:38.26lm/W	
LAMP:W30B-L12-RDM (AL)		Imax(cd)	723.5
NOMINAL POWER(W)	8	AVAILABILITY(%)	87.4
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	259.0
NOMINAL FLUX(lm)	296.503	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	296.5
TEST VOLTAGE(V)	120.2	θ @50%(H,V)	32,32DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.11	0.12	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	0.00
40	0.00	0.00	0.00	0.01	0.07	0.20	0.35	0.46	0.49	0.43	0.28	0.13	0.02	0.00	0.00	0.00	0.00	0.00	2.45	0.00
32	0.00	0.00	0.00	0.05	0.26	0.56	0.87	1.14	1.27	1.17	0.85	0.44	0.12	0.01	0.00	0.00	0.00	0.00	6.75	1.81
24	0.00	0.00	0.01	0.16	0.50	1.00	1.60	2.23	2.59	2.43	1.78	0.98	0.39	0.06	0.00	0.00	0.00	0.00	13.7	10.6
16	0.00	0.00	0.03	0.25	0.74	1.54	2.79	4.36	5.21	4.72	3.35	1.81	0.76	0.22	0.01	0.00	0.00	0.00	25.8	23.5
8	0.00	0.00	0.04	0.31	0.92	2.15	4.56	7.94	9.82	8.59	5.62	2.86	1.17	0.37	0.04	0.00	0.00	0.00	44.4	42.4
0	0.00	0.00	0.06	0.36	1.05	2.58	5.87	10.6	13.2	11.3	7.15	3.54	1.41	0.46	0.07	0.00	0.00	0.00	57.7	55.8
-8	0.00	0.00	0.07	0.39	1.12	2.73	6.21	11.0	13.3	11.0	6.82	3.34	1.32	0.43	0.06	0.00	0.00	0.00	57.8	55.9
-16	0.00	0.00	0.06	0.34	0.94	2.09	4.29	7.25	8.81	7.70	5.06	2.63	1.11	0.37	0.05	0.00	0.00	0.00	40.7	38.6
-24	0.00	0.00	0.03	0.25	0.69	1.39	2.37	3.61	4.42	4.22	3.09	1.75	0.80	0.28	0.03	0.00	0.00	0.00	22.9	20.4
-32	0.00	0.00	0.01	0.16	0.48	0.94	1.47	2.00	2.35	2.31	1.79	1.07	0.50	0.15	0.01	0.00	0.00	0.00	13.3	9.71
-40	0.00	0.00	0.00	0.08	0.29	0.58	0.86	1.07	1.18	1.15	0.89	0.54	0.24	0.04	0.00	0.00	0.00	0.00	6.92	0.41
-48	0.00	0.00	0.00	0.02	0.12	0.28	0.42	0.50	0.52	0.47	0.35	0.19	0.05	0.00	0.00	0.00	0.00	0.00	2.93	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.12	0.13	0.11	0.07	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.60	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																				
Φ t	0.00	0.00	0.31	2.39	7.20	16.1	31.9	52.4	63.4	55.8	37.2	19.3	7.92	2.40	0.28	0.00	0.00	0.00	297	---
Φ a	0.00	0.00	0.00	0.00	1.71	12.2	28.5	49.5	60.6	53.0	34.4	16.0	3.13	0.00	0.00	0.00	0.00	0.00	---	259


one-half-peak spread: U:15.2,D:16.9 , L:14.9,NEW Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.1195A P:7.751W PF:0.5396 Lamp Flux:296.503x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010108
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

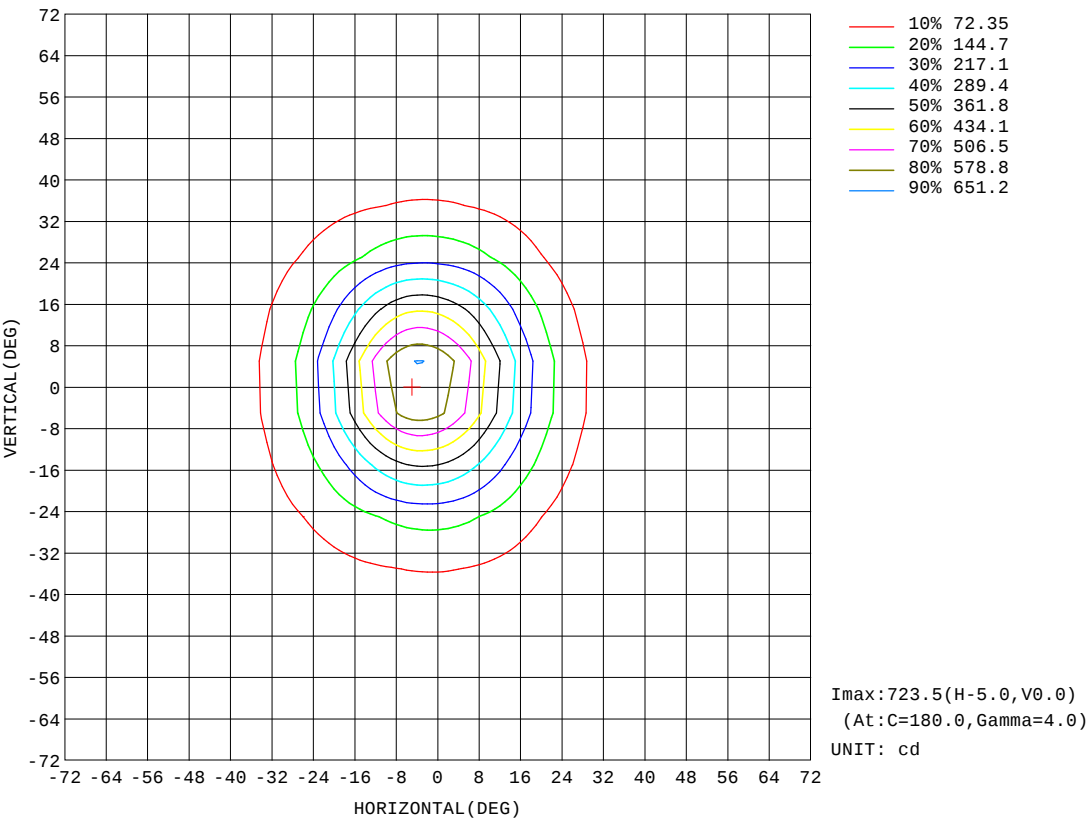


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.1195A P:7.751W PF:0.5396 Lamp Flux:296.503x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010108
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

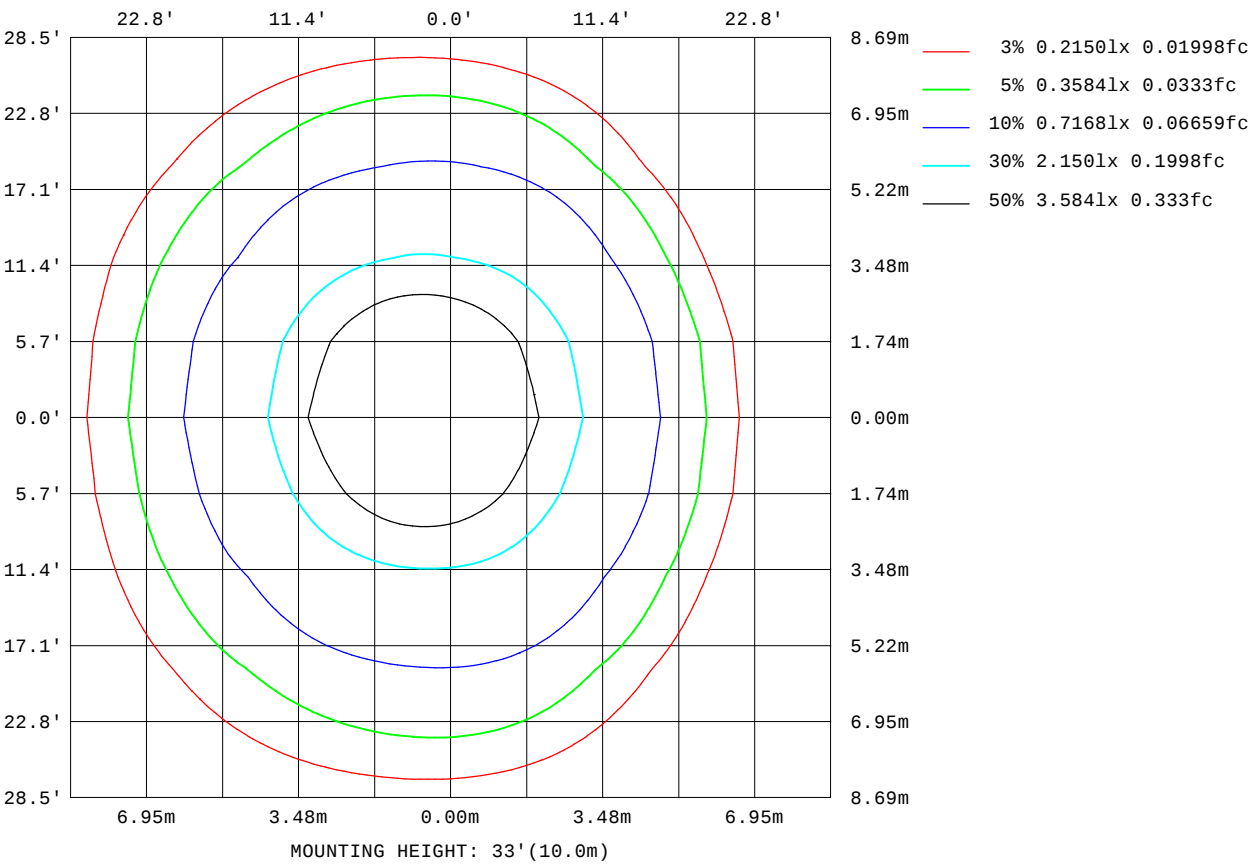


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.2V I:0.1195A P:7.751W PF:0.5396 Lamp Flux:296.503x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010108
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

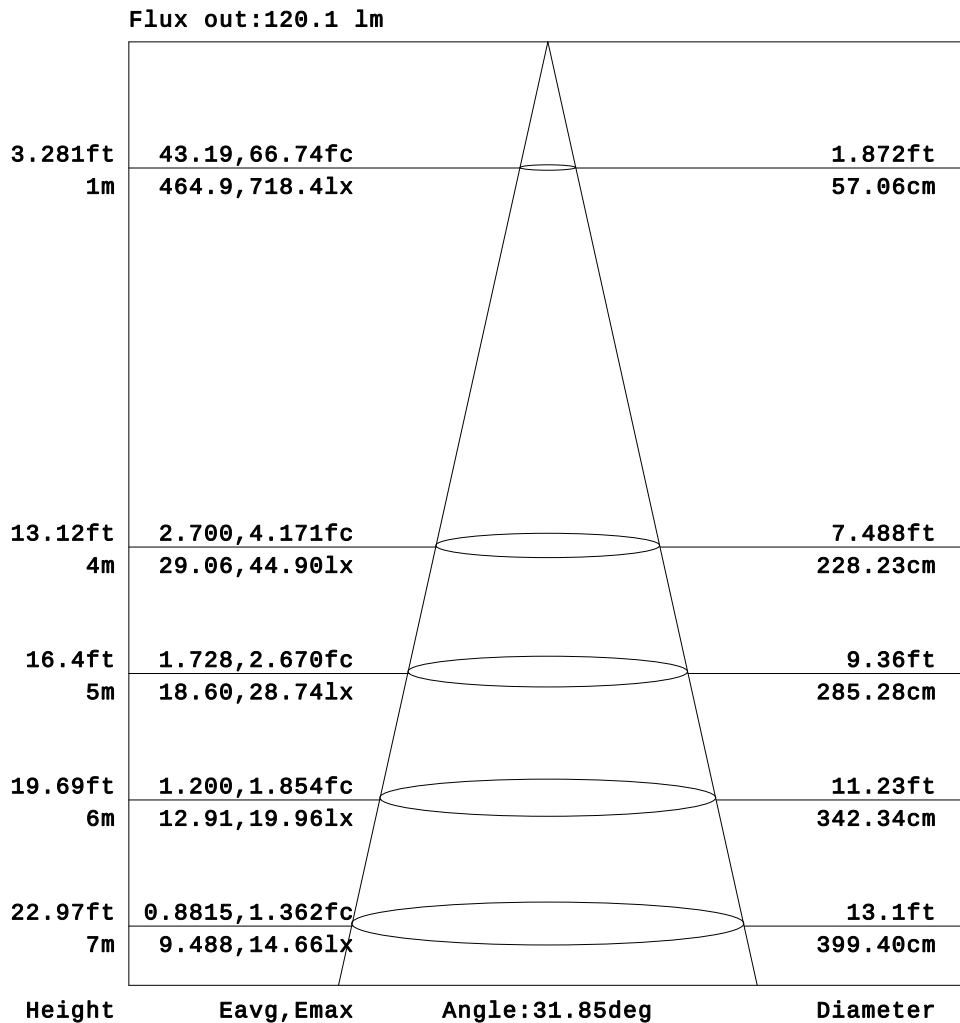


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

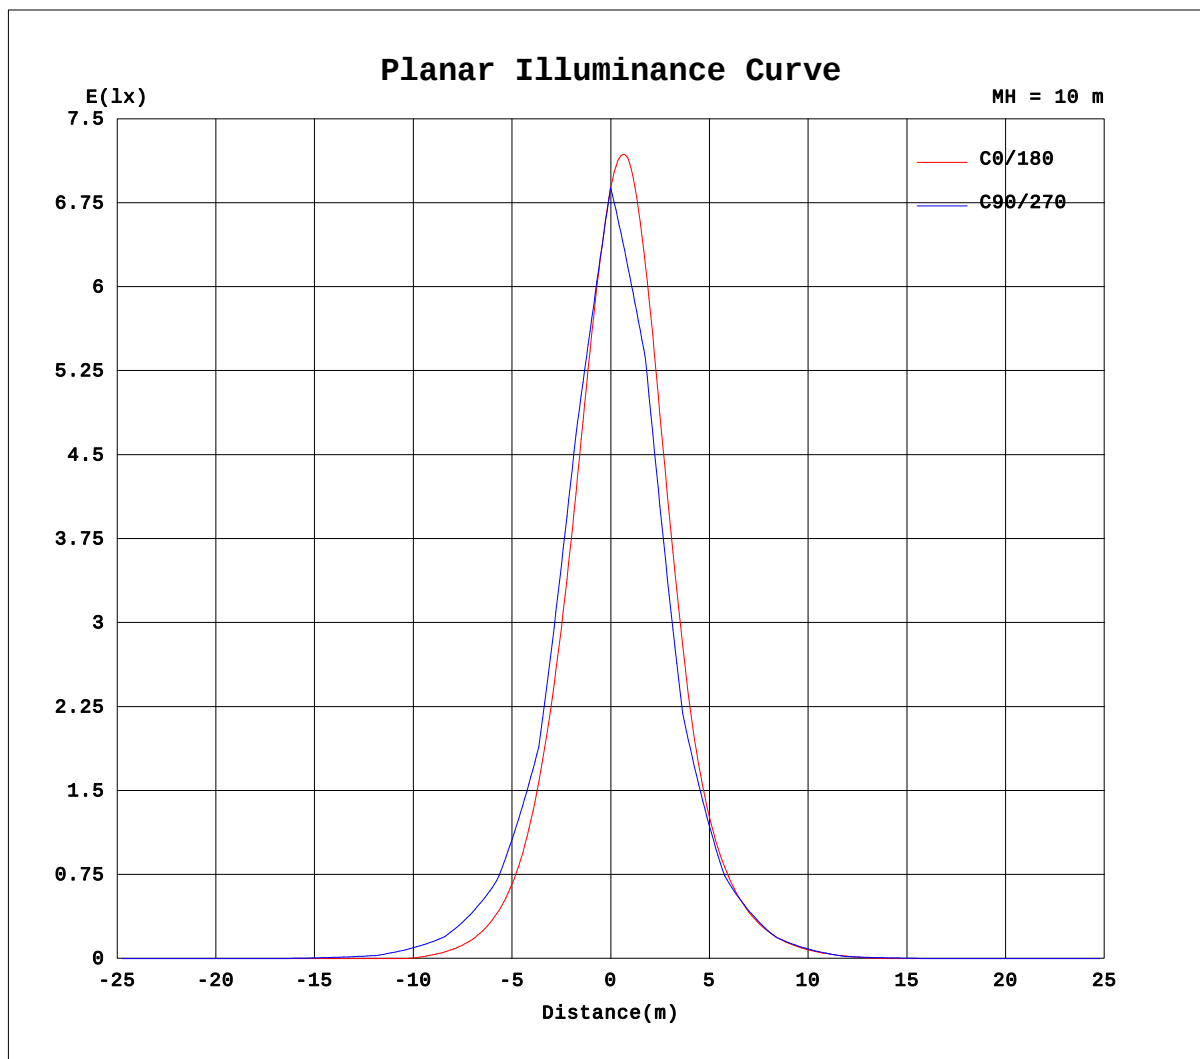

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1195A P:7.751W PF:0.5396 Lamp Flux:296.503x1 lm																	
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED												WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:2024010108					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	1.63	3.13	4.26	5.07	5.54	5.61	5.41
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.51	3.90	6.77	8.89	10.4	11.2	11.2	10.7
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	2.96	6.47	11.8	17.0	21.4	24.6	26.8	27.9	27.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	7.24	14.3	21.8	29.2	35.4	39.9	43.1	44.7	44.1
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	3.74	11.5	20.9	31.4	42.4	52.7	62.0	69.5	74.5	75.8
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	9.07	19.2	31.4	45.4	59.9	74.0	87.3	98.3	106	107
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.27	10.8	22.5	37.6	55.9	76.7	100	127	151	166	168
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.06	16.8	31.3	50.5	74.4	103	137	176	210	229	227
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.47	16.5	32.2	54.1	84.3	126	184	257	325	364	362
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	8.73	21.7	40.5	68.3	109	169	258	368	461	505	485
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.12	19.8	38.5	66.9	110	176	281	415	540	611	595
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	9.77	24.2	45.9	79.8	133	217	354	516	659	724	680
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.91	19.7	38.9	68.3	113	183	295	438	574	649	631
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	8.35	21.8	41.7	71.7	116	186	291	419	531	582	555
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.76	16.1	32.7	56.6	89.7	138	206	294	377	424	416
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.06	16.2	31.8	53.2	79.2	112	155	206	249	270	263
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.64	9.89	22.2	38.5	58.2	81.6	110	143	173	191	190
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	8.00	18.4	31.1	45.8	61.4	77.2	92.8	106	114	113
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.09	10.3	19.9	30.6	42.0	53.2	63.7	72.6	78.0	78.2
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	5.80	12.7	20.0	27.2	33.5	38.5	41.9	43.2	41.8
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.25	5.62	9.74	14.8	19.2	22.6	24.9	25.7	24.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.57	4.23	6.37	7.76	8.33	8.12	7.15
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	1.87	3.00	3.77	4.15	4.11	3.71
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2024-01-25

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1195A P:7.751W PF:0.5396 Lamp Flux:296.503x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED		WEIGHT:
DIM.:		SERIAL No.:2024010108
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--2																UNIT: cd			
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	4.82	3.79	2.33	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	9.32	7.08	4.03	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	25.7	22.1	16.9	11.2	6.44	2.78	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	41.0	35.2	27.5	19.4	11.3	4.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	71.8	62.4	49.4	35.8	23.3	12.8	4.70	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	99.7	84.9	65.7	46.9	30.7	17.7	7.56	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	157	134	103	73.1	47.8	28.8	14.9	4.74	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	207	171	128	88.2	56.4	33.7	17.6	6.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	322	259	189	128	80.3	47.3	25.3	10.8	1.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	414	319	224	146	88.8	50.6	26.3	10.9	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	511	394	277	180	108	61.4	32.2	14.2	2.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	566	420	288	181	105	58.2	29.5	12.2	1.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	541	414	289	187	111	62.2	32.1	13.8	2.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	470	356	246	157	93.0	51.8	25.8	9.85	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	366	290	209	138	83.8	47.4	23.7	8.83	0.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	235	192	141	93.7	57.5	31.8	14.5	3.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	174	146	111	75.2	46.6	25.7	11.1	2.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	104	87.3	65.7	44.2	26.3	12.8	3.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	72.7	61.5	46.9	31.5	18.0	7.75	2.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	37.4	30.3	21.7	13.0	5.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	22.2	17.7	12.0	7.33	3.29	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	5.38	2.90	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	2.90	1.72	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: