

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2149.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	67.2V x 72.3H
	At 50% of Imax	35.1V x 44.3H
	At 90% of Imax	9.7V x 15.3H
Beam Flux	Total	995.2 lumens per klm.
	To 10% of Imax	941.8 lumens per klm.
	To 50% of Imax	533.0 lumens per klm.
	To 90% of Imax	57.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.1193A P:7.703W PF:0.5372 Lamp Flux:78.6241x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	-TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

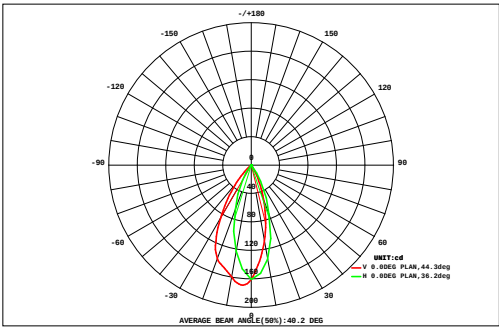

DATA OF LAMP		Eff:10.21lm/W	
LAMP: W30B-L12-RDM (AL)		Imax(cd)	169.0
NOMINAL POWER(W)	8	AVAILABILITY(%)	95.3
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	74.94
NOMINAL FLUX(lm)	78.6241	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	78.62
TEST VOLTAGE(V)	120.2	θ @50%(H,V)	44,35DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
32	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.11	0.15	0.12	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.58	0.16
24	0.00	0.00	0.00	0.00	0.04	0.18	0.35	0.54	0.65	0.58	0.35	0.10	0.01	0.00	0.00	0.00	0.00	2.81	2.30
16	0.00	0.00	0.00	0.05	0.29	0.56	0.84	1.18	1.43	1.31	0.89	0.44	0.08	0.00	0.00	0.00	0.00	7.09	6.81
8	0.00	0.00	0.00	0.12	0.51	1.09	1.64	2.06	2.41	2.20	1.54	0.82	0.27	0.01	0.00	0.00	0.00	12.7	12.5
0	0.00	0.00	0.00	0.18	0.68	1.48	2.29	2.75	3.11	2.79	1.94	1.05	0.38	0.03	0.00	0.00	0.00	16.7	16.5
-8	0.00	0.00	0.01	0.23	0.78	1.63	2.42	2.85	3.14	2.68	1.81	0.94	0.32	0.02	0.00	0.00	0.00	16.8	16.6
-16	0.00	0.00	0.00	0.15	0.53	1.08	1.58	2.01	2.27	2.04	1.39	0.71	0.22	0.01	0.00	0.00	0.00	12.0	11.8
-24	0.00	0.00	0.00	0.03	0.23	0.48	0.73	1.04	1.26	1.20	0.84	0.43	0.12	0.01	0.00	0.00	0.00	6.36	6.05
-32	0.00	0.00	0.00	0.01	0.06	0.18	0.31	0.48	0.61	0.58	0.40	0.17	0.04	0.00	0.00	0.00	0.00	2.84	2.24
-40	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.14	0.17	0.16	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.69	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																			
Φ t	0.00	0.00	0.02	0.78	3.12	6.73	10.3	13.2	15.2	13.7	9.35	4.72	1.44	0.09	0.00	0.00	0.00	79	---
Φ a	0.00	0.00	0.00	0.36	2.76	6.41	9.94	12.9	15.0	13.4	8.98	4.33	0.90	0.00	0.00	0.00	0.00	---	75


one-half-peak spread: U:16.9,D:18.4 , L:26.5, Beam Type: Type 5 x 4 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.1193A P:7.703W PF:0.5372 Lamp Flux:78.6241x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

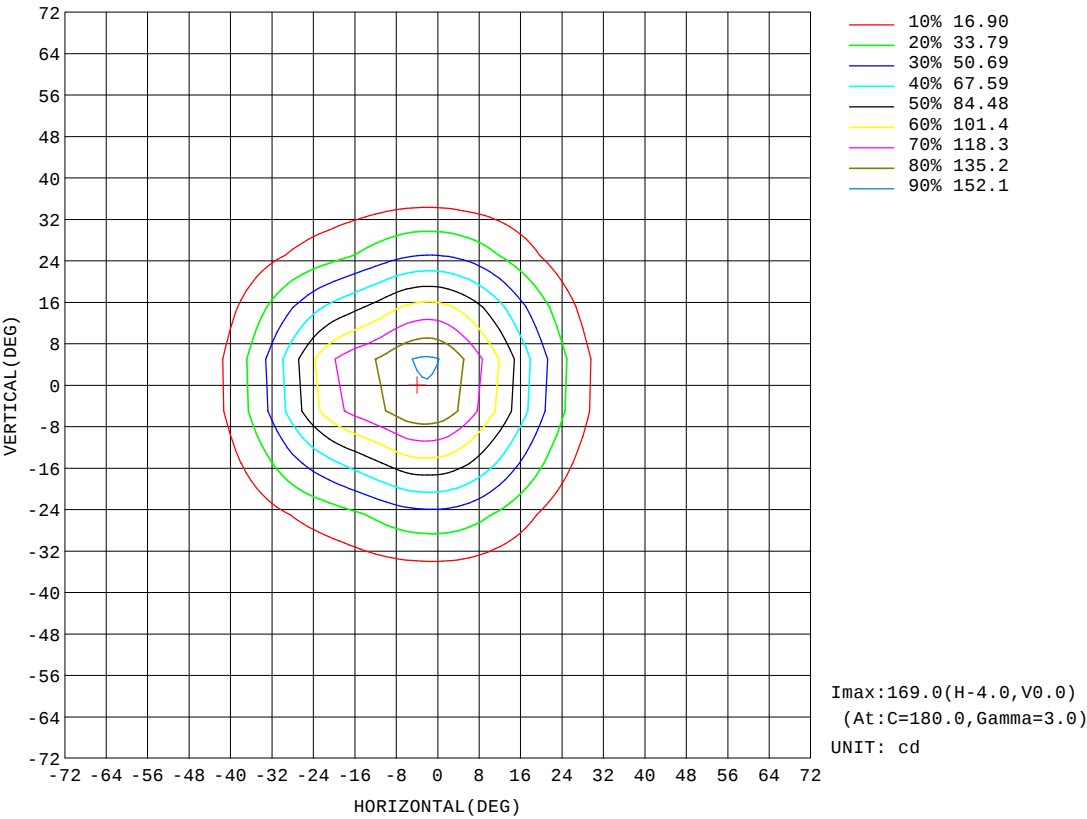


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.1193A P:7.703W PF:0.5372 Lamp Flux:78.624lx1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

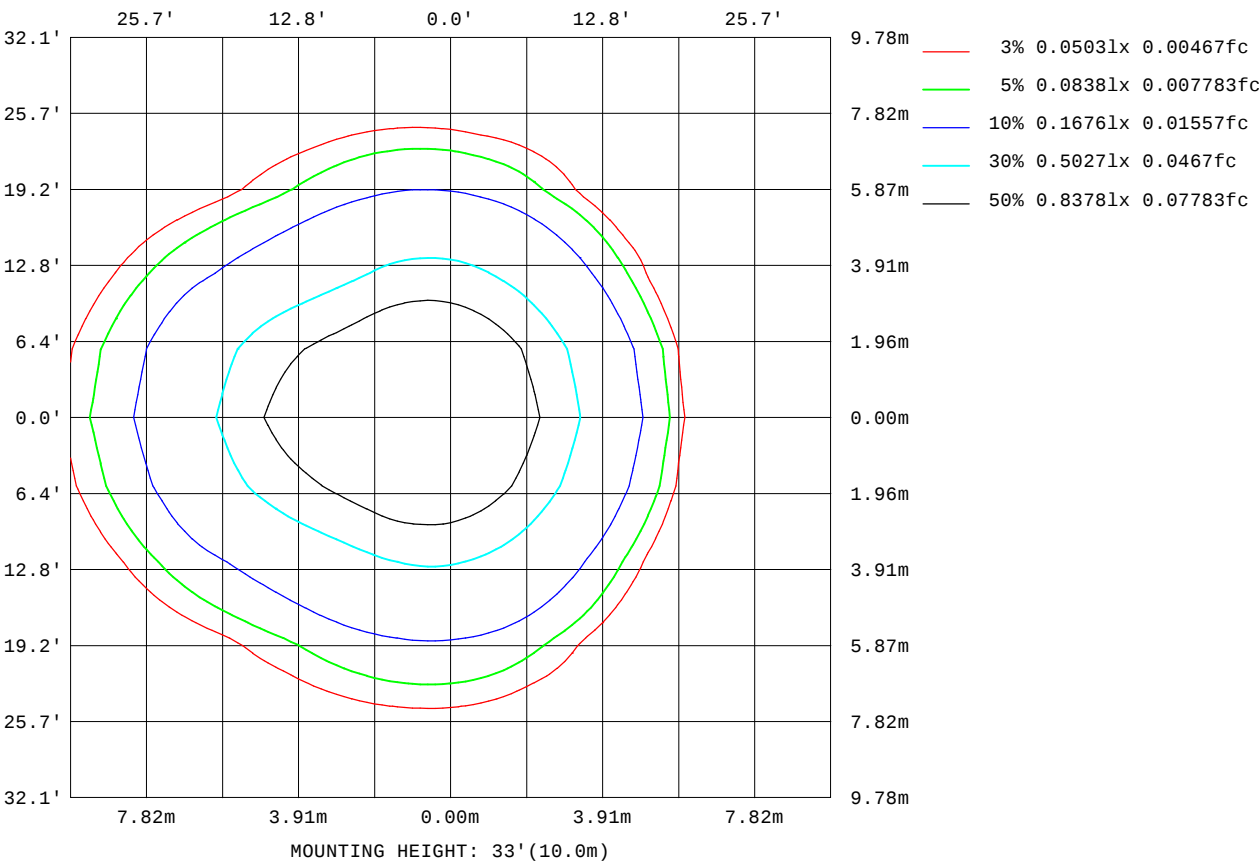


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.2V I:0.1193A P:7.703W PF:0.5372 Lamp Flux:78.624lx1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	-TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

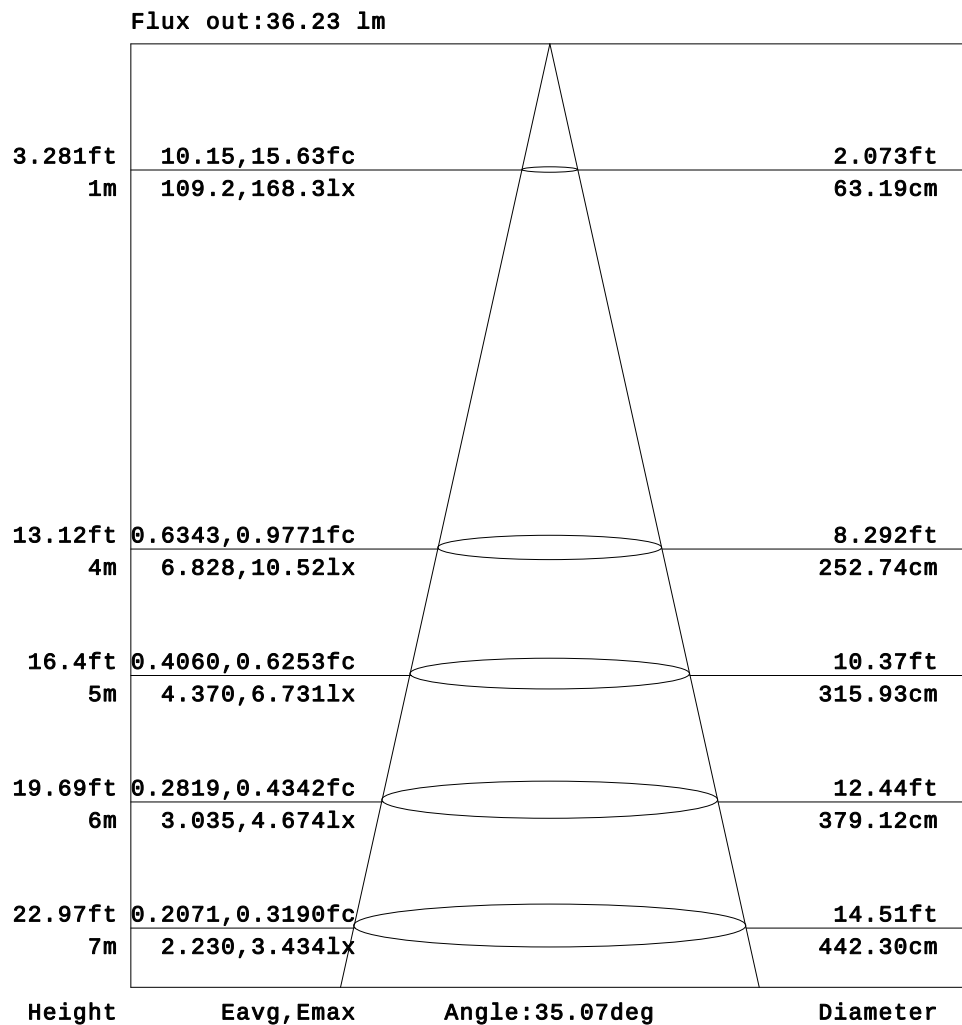


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

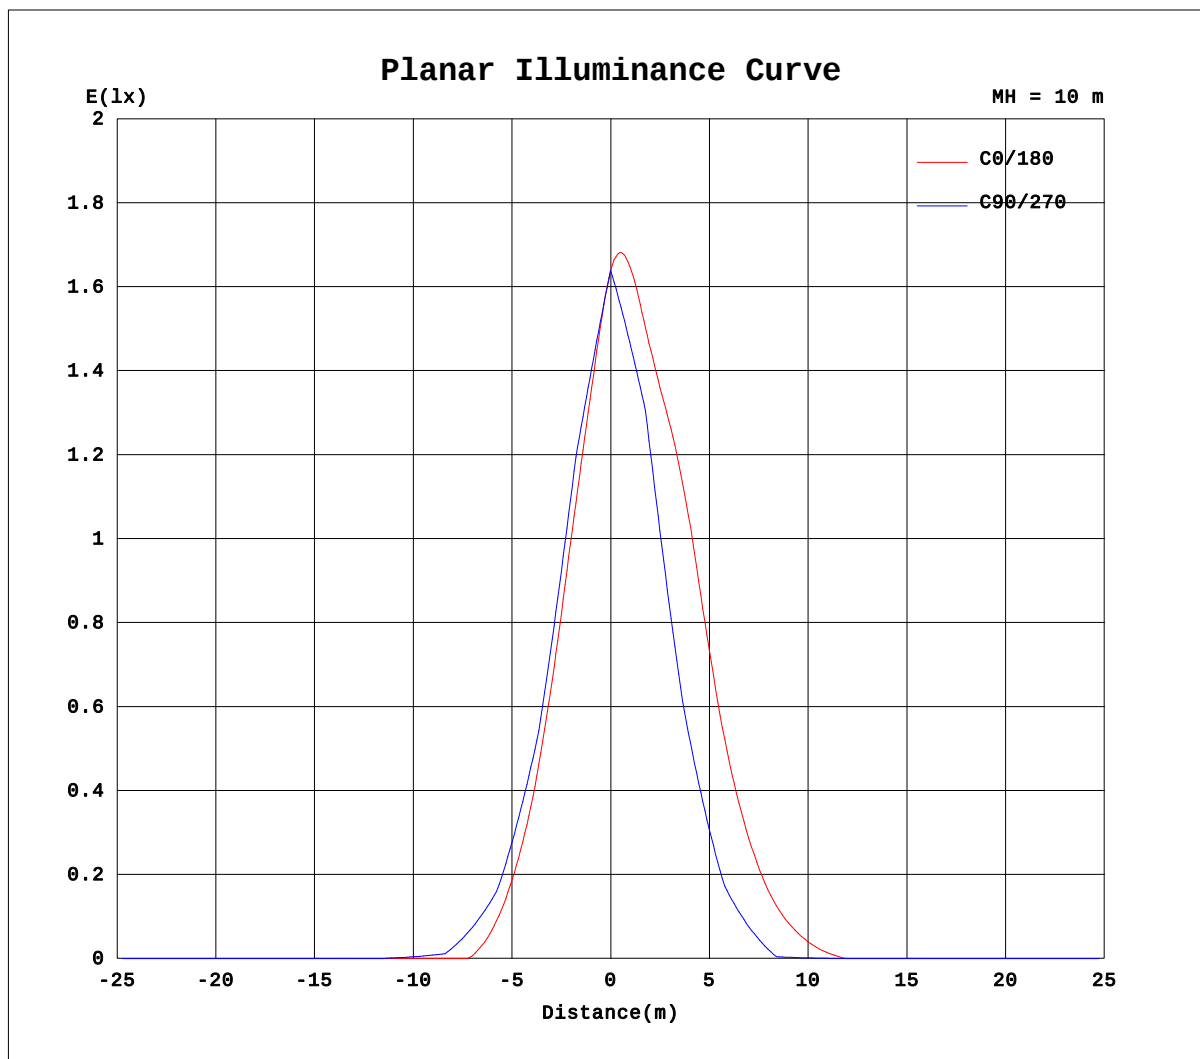

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2024-01-25

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1193A P:7.703W PF:0.5372 Lamp Flux:78.6241x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -RYPE:LED		WEIGHT:
DIM.:		SERIAL No.:2024010107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.97	1.28	1.34	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.34	2.27	2.66	2.55	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	2.45	4.49	6.55	9.04	11.6	13.4	13.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.35	6.58	10.6	14.7	19.0	22.6	24.8	24.5	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.23	8.15	15.0	20.7	26.1	32.4	39.3	44.3	45.4	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.75	9.92	19.6	28.3	35.0	42.2	51.2	60.7	65.6	64.7	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.62	12.2	25.0	39.8	54.0	65.6	75.8	86.4	95.6	96.1	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	9.96	23.9	42.0	63.3	82.3	97.2	109	121	127	123	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.96	21.0	40.6	64.5	90.9	113	125	135	147	146	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.95	14.3	32.3	57.4	86.7	118	139	149	160	169	160	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.29	21.8	42.3	67.0	94.7	118	130	140	152	153	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	10.7	26.0	46.0	69.5	92.1	107	117	131	140	134	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	13.4	27.7	43.7	59.6	73.0	83.1	94.6	105	107	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.39	11.3	21.9	31.1	38.9	47.0	57.3	68.2	74.4	73.0	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.75	9.07	16.2	22.4	28.6	35.7	43.7	49.7	50.8	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.13	6.37	10.7	15.5	20.6	24.9	27.1	26.3	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	2.33	4.50	6.76	9.28	12.1	13.9	14.0	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	1.14	1.44	0.83	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	0.69	0.58	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1193A P:7.703W PF:0.5372 Lamp Flux:78.6241x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -RYPE:LED		WEIGHT:
DIM.:		SERIAL No.:2024010107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	1.04	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	12.6	9.67	6.36	3.19	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	21.6	16.5	10.1	3.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	42.0	34.5	24.9	15.2	6.48	1.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	57.2	45.2	31.8	19.0	8.32	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	87.8	72.5	53.7	35.7	20.0	7.74	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	107	85.1	61.1	39.1	21.1	7.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	130	107	80.2	54.3	32.1	14.9	2.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	135	108	78.2	50.5	28.3	10.9	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	135	111	83.4	56.8	33.5	15.4	2.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	117	92.8	66.7	43.2	23.1	7.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	96.6	79.6	59.0	39.6	22.1	8.25	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	64.2	50.3	35.5	21.4	9.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	46.4	37.7	26.9	16.3	6.87	1.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	22.5	16.6	9.73	2.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	12.2	9.60	6.26	2.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: