

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1199.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	79.9V x 94.3H
	At 50% of Imax	44.8V x 60.7H
	At 90% of Imax	16.8V x 30.9H

Beam Flux	Total	998.6 lumens per klm.
	To 10% of Imax	945.0 lumens per klm.
	To 50% of Imax	586.3 lumens per klm.
	To 90% of Imax	123.8 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.1183A P:7.677W PF:0.5400 Lamp Flux:246.88x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	-TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010110
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

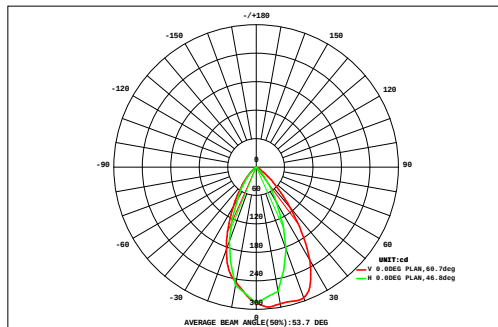

DATA OF LAMP		Eff:32.16lm/W	
LAMP: W30B-L12-RDM (AL)		Imax(cd)	296.0
NOMINAL POWER(W)	8	AVAILABILITY(%)	95.0
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	234.6
NOMINAL FLUX(lm)	246.88	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	246.9
TEST VOLTAGE(V)	120.2	θ @50%(H,V)	61,45DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
	64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
	56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
	48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.05	0.01	0.00	0.00	0.00	0.00	0.14	0.00			
	40	0.00	0.00	0.00	0.00	0.00	0.06	0.14	0.21	0.24	0.24	0.27	0.31	0.29	0.18	0.07	0.01	0.00	0.00	2.03	0.08		
	32	0.00	0.00	0.00	0.01	0.07	0.28	0.54	0.76	0.88	0.87	0.86	0.88	0.78	0.52	0.24	0.04	0.00	0.00	6.73	5.40		
	24	0.00	0.00	0.00	0.06	0.32	0.73	1.22	1.68	1.93	1.89	1.78	1.73	1.48	0.97	0.48	0.14	0.00	0.00	14.4	13.8		
	16	0.00	0.00	0.01	0.18	0.58	1.23	2.10	2.98	3.51	3.48	3.18	2.93	2.44	1.55	0.75	0.25	0.02	0.00	25.2	24.7		
	8	0.00	0.00	0.03	0.25	0.75	1.61	2.80	3.95	4.67	4.85	4.55	4.27	3.49	2.17	1.01	0.35	0.05	0.00	34.8	34.3		
	0	0.00	0.00	0.05	0.31	0.87	1.86	3.24	4.49	5.26	5.62	5.44	5.18	4.19	2.54	1.15	0.40	0.06	0.00	40.7	40.2		
	-8	0.00	0.00	0.07	0.35	0.93	1.92	3.29	4.44	5.19	5.59	5.45	5.19	4.13	2.44	1.08	0.37	0.05	0.00	40.5	40.1		
	-16	0.00	0.00	0.06	0.30	0.79	1.59	2.72	3.86	4.55	4.69	4.40	4.05	3.34	2.08	0.97	0.33	0.05	0.00	33.8	33.3		
	-24	0.00	0.00	0.03	0.22	0.57	1.12	1.86	2.65	3.15	3.15	2.88	2.67	2.31	1.53	0.76	0.27	0.03	0.00	23.2	22.6		
	-32	0.00	0.00	0.01	0.13	0.38	0.74	1.16	1.59	1.85	1.82	1.70	1.64	1.46	1.00	0.52	0.17	0.01	0.00	14.2	13.5		
	-40	0.00	0.00	0.00	0.06	0.21	0.44	0.66	0.83	0.90	0.86	0.85	0.88	0.79	0.55	0.28	0.07	0.00	0.00	7.38	6.31		
	-48	0.00	0.00	0.00	0.01	0.09	0.20	0.33	0.39	0.39	0.36	0.37	0.39	0.34	0.21	0.08	0.01	0.00	0.00	3.18	0.33		
-56	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.09	0.09	0.09	0.08	0.08	0.07	0.03	0.01	0.00	0.00	0.00	0.61	0.00			
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.11	0.00			
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
Φ t	0.00	0.00	0.00	0.26	1.87	5.57	11.8	20.1	27.9	32.6	33.5	31.8	30.3	25.2	15.8	7.38	2.41	0.28	0.00	247	---		
Φ a	0.00	0.00	0.00	0.36	4.43	10.9	19.2	27.1	31.9	32.8	31.1	29.6	24.5	15.1	6.53	1.07	0.00	0.00	---	235			

one-half-peak spread: U:21.7,D:23.4 , L:29.3,R:18.7


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.1183A P:7.677W PF:0.5400 Lamp Flux:246.88x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010110
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

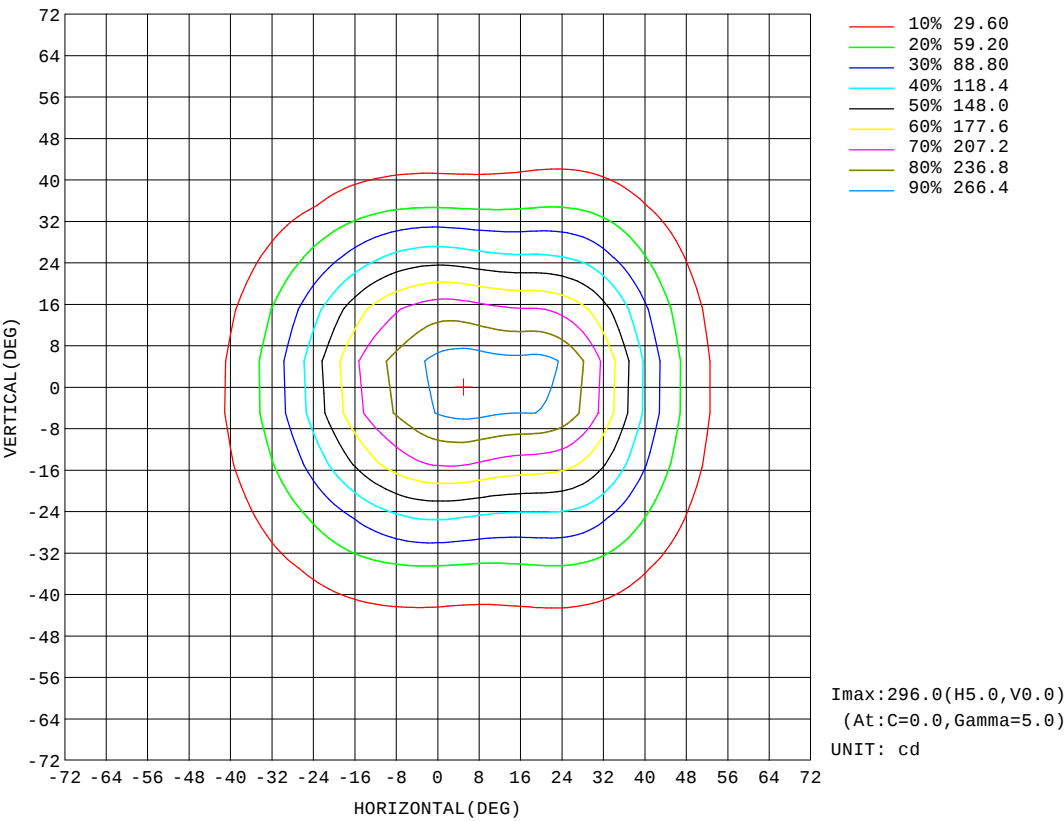


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.1183A P:7.677W PF:0.5400 Lamp Flux:246.88x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	-TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010110
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

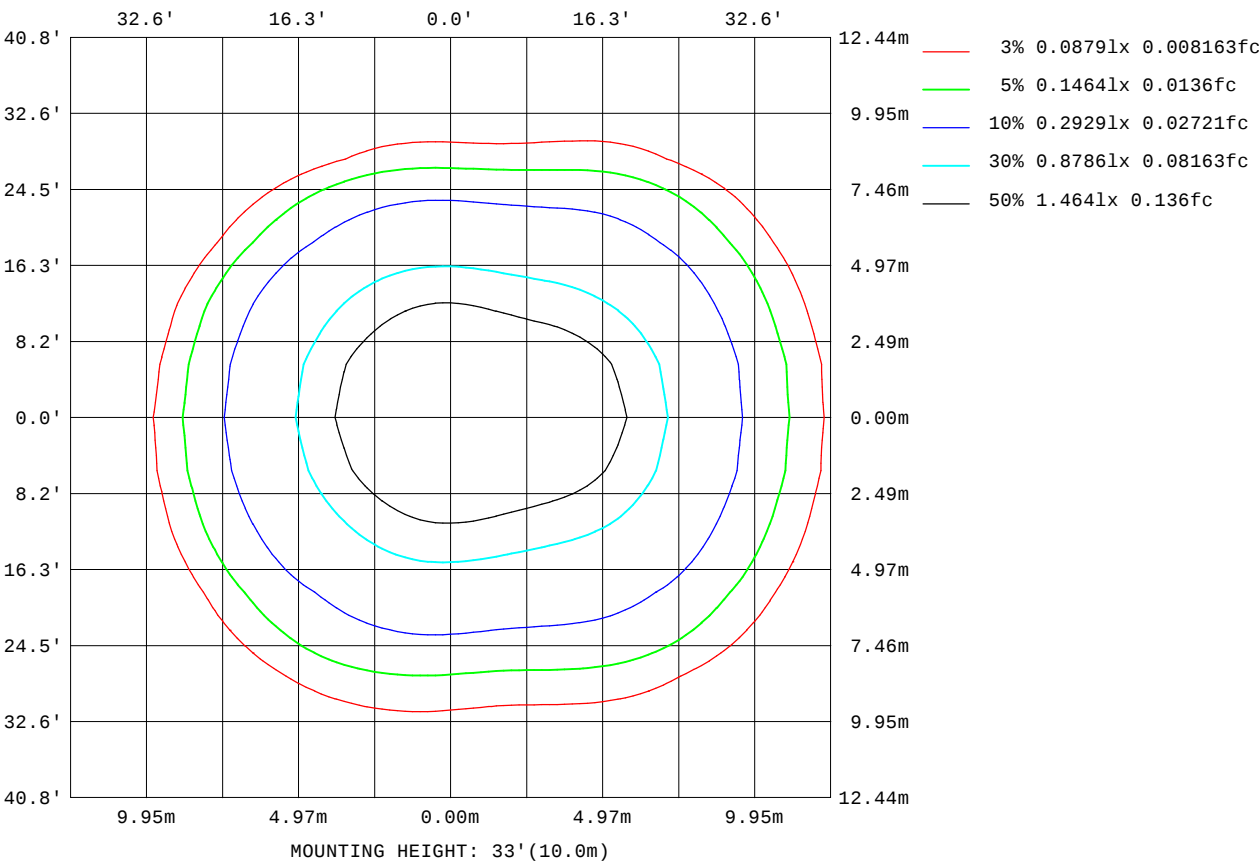


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.2V I:0.1183A P:7.677W PF:0.5400 Lamp Flux:246.88x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (ALD) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010110
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

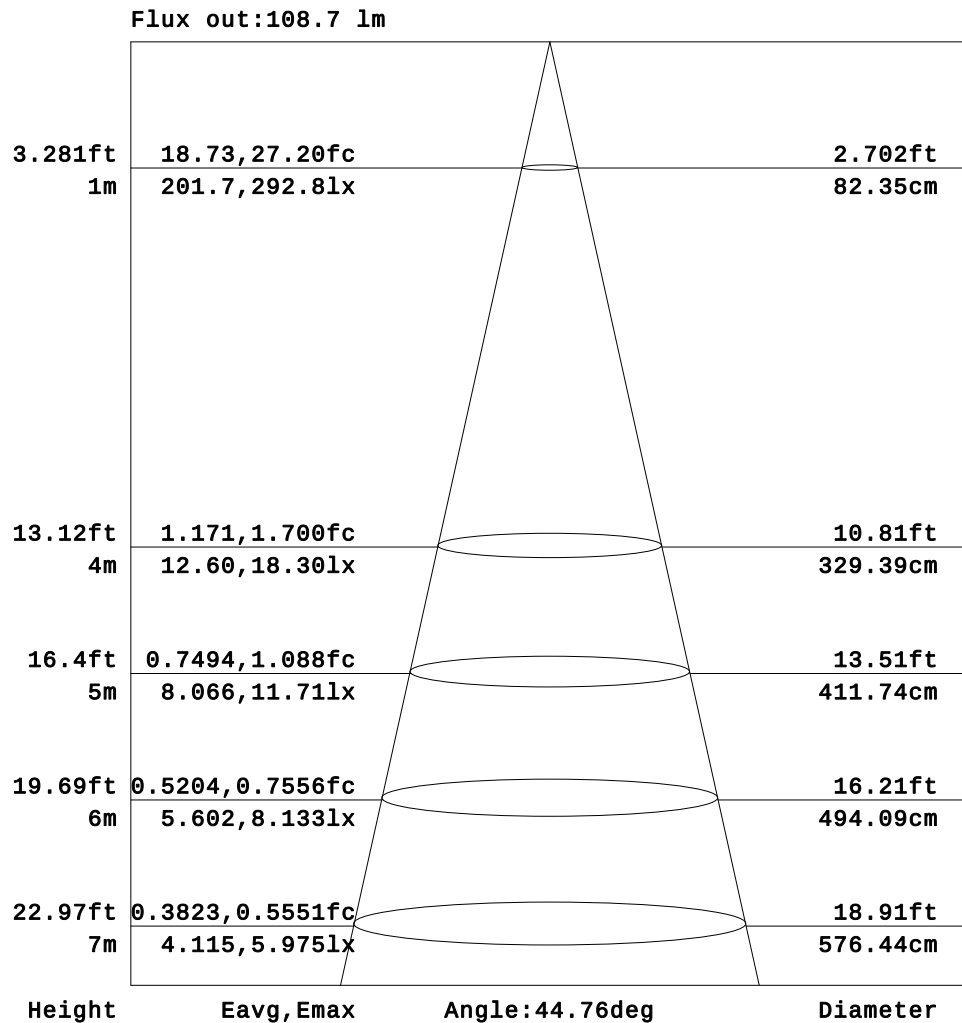


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

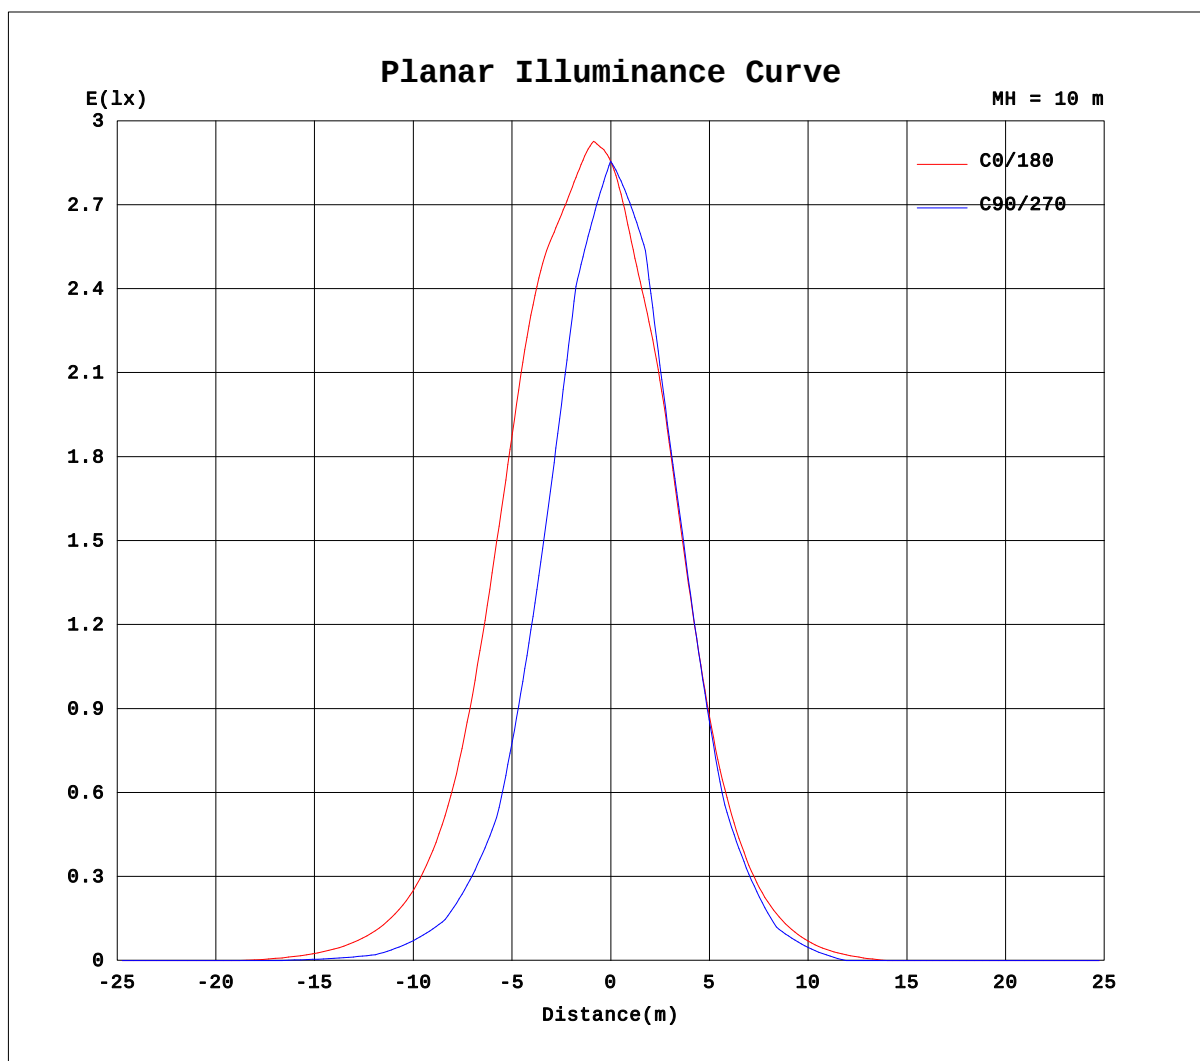

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1183A P:7.677W PF:0.5400 Lamp Flux:246.88x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -WYPE:LED		WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010110
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	1.62	2.79	3.52	4.04	4.15	4.02	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	3.77	5.94	7.28	8.20	8.29	7.93	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.05	4.76	7.88	12.3	16.1	18.8	20.5	21.0	20.5	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	5.17	10.6	16.5	22.5	27.6	31.2	33.1	33.6	32.5	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.09	8.64	15.8	24.1	32.5	40.5	47.6	52.9	55.9	55.9	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.69	7.50	14.8	24.2	35.0	45.8	56.4	66.5	74.2	78.7	78.5	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.11	9.28	18.3	30.2	44.3	60.1	77.3	94.6	109	120	122	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.78	14.3	26.2	41.6	59.5	81.0	105	129	150	163	166	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.52	14.6	27.7	45.2	67.0	94.0	125	156	182	200	209	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	8.50	19.3	35.4	56.9	84.3	119	158	194	223	242	253	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.96	17.6	33.6	55.7	84.7	121	163	203	231	251	268	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	8.94	21.4	39.6	65.0	98.3	140	185	224	247	268	287	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.92	16.8	33.2	56.2	86.8	125	168	209	236	257	274	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.55	18.0	34.9	58.4	89.3	127	169	207	234	253	266	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.64	12.0	26.1	45.5	70.7	101	136	169	196	214	224	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.85	10.9	24.1	41.7	63.5	89.1	117	144	167	181	184	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	4.60	14.3	27.4	43.8	62.8	83.3	103	121	131	135	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.40	9.02	19.1	31.3	44.5	57.9	70.3	79.7	85.0	85.5	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	3.70	8.65	17.1	26.4	36.0	44.6	51.6	55.5	56.3	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.15	6.52	12.2	17.7	22.1	25.5	27.0	26.8	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	2.70	5.52	8.32	10.6	12.5	13.4	13.4	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1183A P:7.677W PF:0.5400 Lamp Flux:246.88x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -WYPE:LED		WEIGHT:
DIM.:		SERIAL No.:2024010110
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--2																UNIT: cd			
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	3.79	3.72	3.77	3.86	3.73	3.18	2.09	0.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	7.53	7.42	7.59	7.70	7.32	5.99	3.65	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	19.6	19.4	20.3	21.2	21.1	19.0	15.2	10.1	5.70	2.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	31.4	31.6	33.3	34.9	34.4	30.8	24.8	17.6	9.87	2.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	54.1	52.9	54.1	56.0	55.9	51.2	42.4	31.6	20.5	10.4	2.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	76.0	74.3	75.6	77.7	76.3	68.7	55.9	41.2	26.9	14.4	3.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	119	114	112	112	110	99.8	81.1	59.6	39.6	22.9	9.69	0.91	0.00	0.00	0.00	0.00	0.00	0.00	
-20	161	153	148	146	141	124	97.7	69.7	45.0	25.6	10.9	0.41	0.00	0.00	0.00	0.00	0.00	0.00	
-15	208	201	195	191	184	163	128	90.8	58.8	34.2	16.5	3.54	0.00	0.00	0.00	0.00	0.00	0.00	
-10	253	246	240	235	221	189	144	98.2	61.5	34.7	16.3	2.96	0.00	0.00	0.00	0.00	0.00	0.00	
-5	274	270	266	266	251	216	166	114	71.5	41.2	20.4	5.75	0.00	0.00	0.00	0.00	0.00	0.00	
0	296	293	293	293	270	225	167	110	67.6	37.9	17.8	3.83	0.00	0.00	0.00	0.00	0.00	0.00	
5	281	276	273	275	258	221	169	115	72.2	41.4	20.4	5.71	0.00	0.00	0.00	0.00	0.00	0.00	
10	265	258	254	253	234	198	149	101	62.5	35.1	16.2	2.85	0.00	0.00	0.00	0.00	0.00	0.00	
15	223	215	209	208	196	172	134	93.3	59.6	34.3	16.2	3.29	0.00	0.00	0.00	0.00	0.00	0.00	
20	177	168	164	160	151	132	102	71.2	45.1	25.2	10.4	0.21	0.00	0.00	0.00	0.00	0.00	0.00	
25	131	125	122	122	118	105	83.8	60.3	39.3	22.2	9.07	0.71	0.00	0.00	0.00	0.00	0.00	0.00	
30	82.6	80.5	80.7	83.2	80.7	71.0	56.5	40.7	26.0	13.4	3.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	54.8	53.9	54.7	57.2	56.9	51.2	41.6	30.3	19.2	9.22	2.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	26.4	27.2	29.4	31.8	31.6	28.0	22.3	15.5	8.28	1.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	13.3	14.0	15.6	17.5	18.0	16.3	12.7	8.45	4.85	1.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.28	1.25	2.60	3.72	4.03	3.28	1.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.09	0.51	1.16	1.77	2.02	1.77	0.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: