

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2439.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	71.2V x 64.1H
	At 50% of Imax	31.9V x 31.9H
	At 90% of Imax	8.5V x 11.8H
Beam Flux	Total	998.9 lumens per klm.
	To 10% of Imax	870.2 lumens per klm.
	To 50% of Imax	410.6 lumens per klm.
	To 90% of Imax	46.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.2V I:0.0612A P:7.821W PF:0.4608 Lamp Flux:296.307x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010114
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

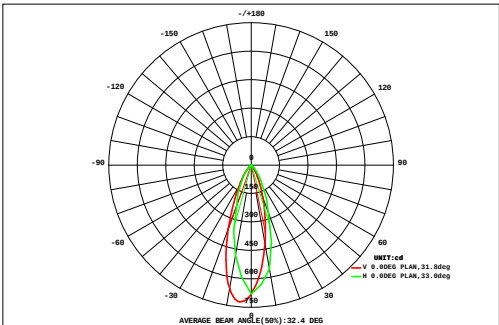

DATA OF LAMP		Eff:37.89lm/W	
LAMP: W30B-L12-RDM (AL)		Imax(cd)	722.9
NOMINAL POWER(W)	8	AVAILABILITY(%)	87.4
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	259.0
NOMINAL FLUX(lm)	296.307	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	296.3
TEST VOLTAGE(V)	277.2	θ @50%(H,V)	32,32DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.12	0.12	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	0.00
40	0.00	0.00	0.00	0.01	0.08	0.20	0.35	0.46	0.50	0.44	0.28	0.13	0.02	0.00	0.00	0.00	0.00	0.00	2.47	0.00
32	0.00	0.00	0.00	0.05	0.27	0.56	0.88	1.15	1.28	1.18	0.85	0.44	0.12	0.01	0.00	0.00	0.00	0.00	6.78	1.84
24	0.00	0.00	0.01	0.16	0.51	1.00	1.61	2.24	2.60	2.43	1.78	0.98	0.39	0.06	0.00	0.00	0.00	0.00	13.8	10.6
16	0.00	0.00	0.03	0.26	0.75	1.55	2.82	4.39	5.23	4.74	3.36	1.81	0.76	0.21	0.01	0.00	0.00	0.00	25.9	23.6
8	0.00	0.00	0.04	0.32	0.93	2.16	4.59	7.97	9.83	8.58	5.60	2.85	1.17	0.37	0.04	0.00	0.00	0.00	44.5	42.5
0	0.00	0.00	0.06	0.36	1.06	2.59	5.90	10.6	13.2	11.3	7.12	3.52	1.40	0.45	0.07	0.00	0.00	0.00	57.7	55.8
-8	0.00	0.00	0.07	0.39	1.13	2.74	6.23	11.0	13.2	11.0	6.79	3.32	1.31	0.42	0.06	0.00	0.00	0.00	57.7	55.8
-16	0.00	0.00	0.06	0.34	0.94	2.10	4.29	7.24	8.78	7.66	5.03	2.61	1.11	0.37	0.05	0.00	0.00	0.00	40.6	38.5
-24	0.00	0.00	0.03	0.26	0.69	1.39	2.37	3.61	4.41	4.20	3.08	1.74	0.79	0.27	0.03	0.00	0.00	0.00	22.9	20.3
-32	0.00	0.00	0.01	0.16	0.48	0.94	1.47	2.00	2.35	2.30	1.78	1.06	0.50	0.15	0.01	0.00	0.00	0.00	13.2	9.69
-40	0.00	0.00	0.00	0.08	0.29	0.58	0.86	1.06	1.18	1.14	0.89	0.54	0.24	0.04	0.00	0.00	0.00	0.00	6.90	0.41
-48	0.00	0.00	0.00	0.02	0.12	0.28	0.42	0.50	0.52	0.47	0.34	0.18	0.05	0.00	0.00	0.00	0.00	0.00	2.89	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.12	0.12	0.11	0.07	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.57	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																		Φ t	Φ a	---
Φ t	0.00	0.00	0.31	2.41	7.24	16.2	32.0	52.5	63.4	55.7	37.0	19.2	7.87	2.38	0.27	0.00	0.00	0.00	296	---
Φ a	0.00	0.00	0.00	0.00	1.78	12.3	28.7	49.5	60.5	52.9	34.3	15.9	3.11	0.00	0.00	0.00	0.00	0.00	---	259


one-half-peak spread: U:15.2,D:16.9 , L:14.9, Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.2V I:0.0612A P:7.821W PF:0.4608 Lamp Flux:296.307x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010114
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

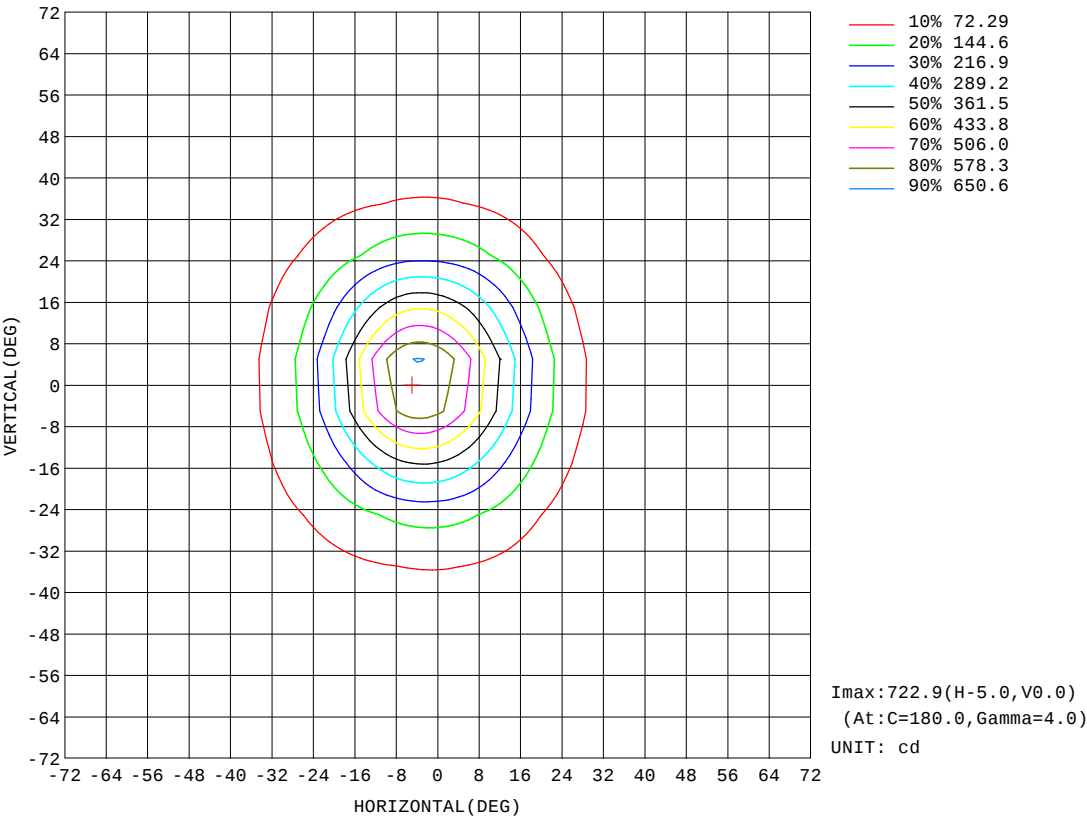


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.2V I:0.0612A P:7.821W PF:0.4608 Lamp Flux:296.307x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010114
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

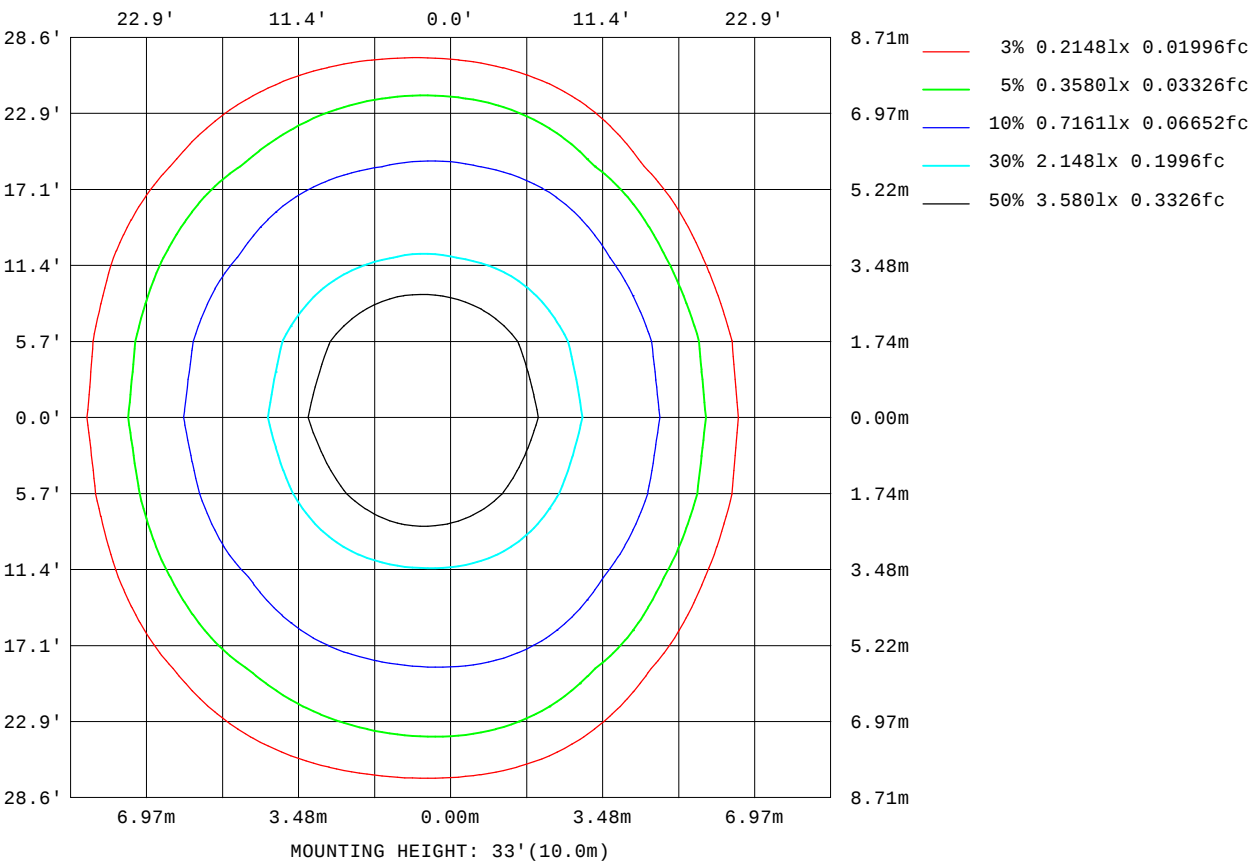


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.2V I:0.0612A P:7.821W PF:0.4608 Lamp Flux:296.307x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010114
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

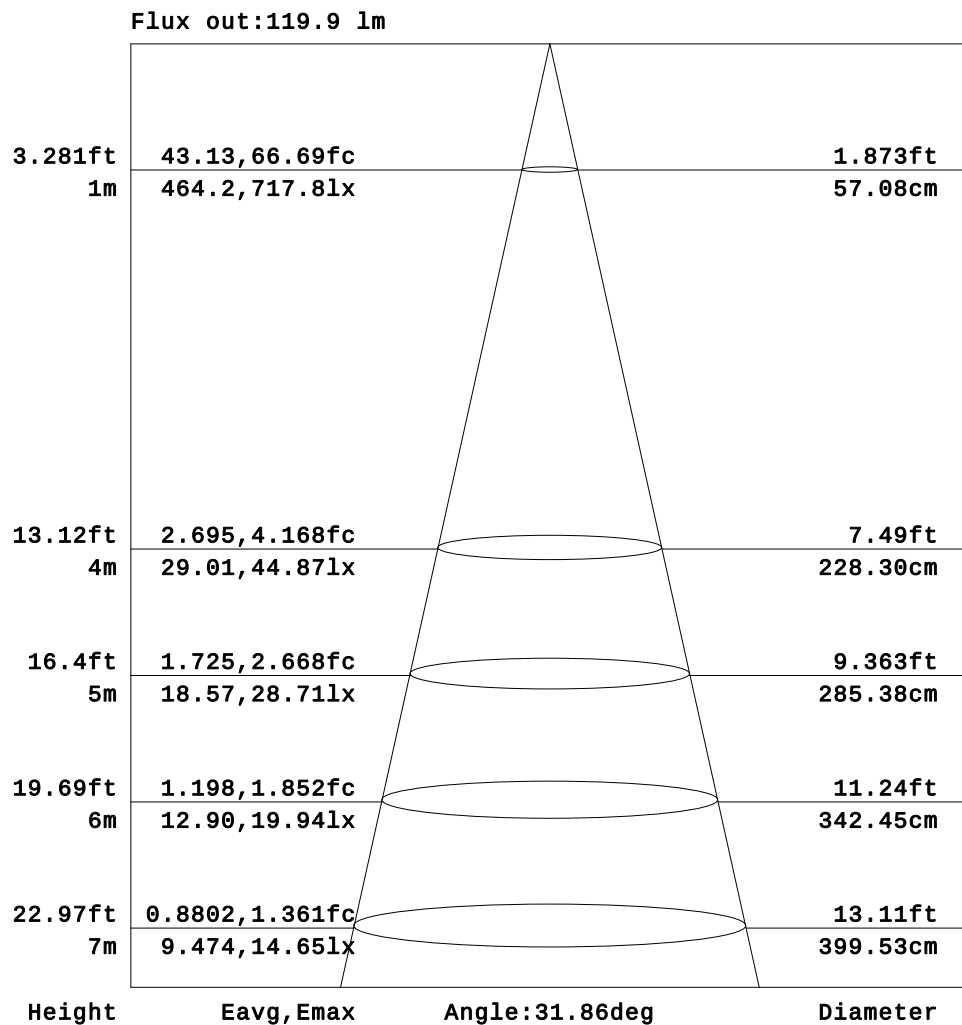


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

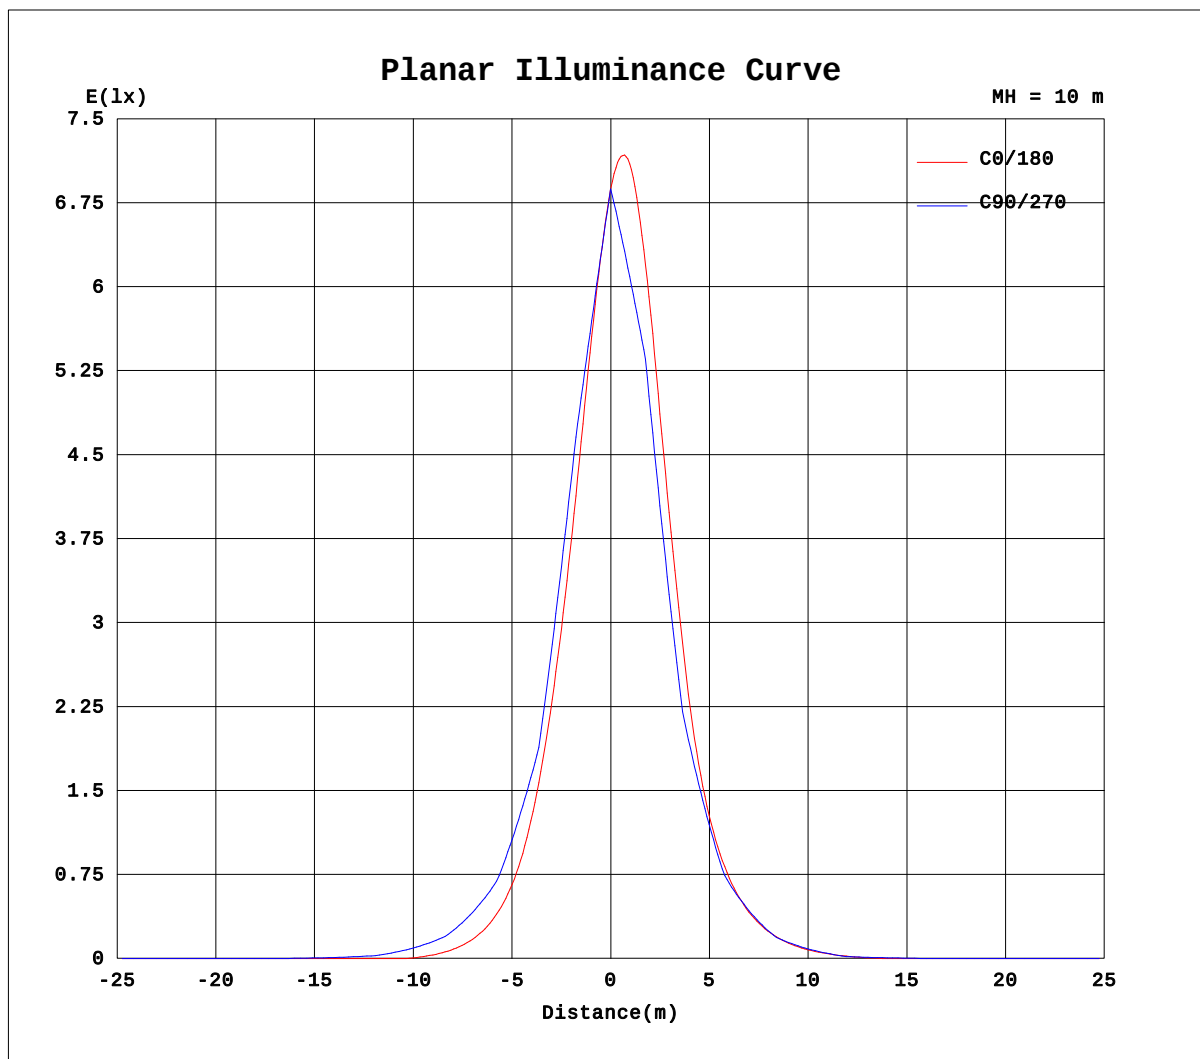

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.0612A P:7.821W PF:0.4608 Lamp Flux:296.307x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010114
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1		UNIT: cd																		
H(DEG) V(DEG)		-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.52	3.00	4.10	4.89	5.36	5.42	5.21
-50		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	3.68	6.50	8.57	10.0	10.8	10.8	10.3
-45		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	2.99	6.47	11.7	16.9	21.2	24.4	26.5	27.5	27.3
-40		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.01	7.31	14.4	21.9	29.2	35.3	39.8	42.8	44.4	43.8
-35		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	3.82	11.6	20.9	31.5	42.4	52.7	61.9	69.3	74.3	75.5
-30		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.24	9.15	19.3	31.5	45.4	59.9	74.0	87.3	98.2	105	106
-25		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.31	10.9	22.6	37.7	56.0	76.8	100	126	150	165	168
-20		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.12	16.9	31.4	50.7	74.5	103	137	176	210	228	226
-15		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.53	16.6	32.3	54.3	84.5	126	184	257	324	363	360
-10		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	8.79	21.8	40.7	68.5	109	169	258	367	460	503	483
-5		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.20	19.9	38.7	67.1	110	176	281	415	541	610	593
0		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	9.90	24.3	46.1	80.1	133	218	356	517	660	723	679
5		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.01	19.9	39.1	68.6	113	184	296	440	576	650	630
10		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	8.46	22.0	41.8	72.0	117	187	292	420	533	583	554
15		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.85	16.3	32.9	57.0	90.3	138	208	296	379	425	417
20		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.16	16.3	32.1	53.6	79.9	113	157	207	251	272	264
25		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.69	10.0	22.5	38.8	58.7	82.2	111	144	174	192	191
30		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	8.17	18.7	31.4	46.2	61.9	77.7	93.4	107	114	114
35		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.17	10.5	20.1	31.0	42.4	53.6	64.1	73.0	78.4	78.5
40		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	5.98	12.9	20.2	27.5	33.8	38.8	42.2	43.4	42.0
45		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.34	5.73	9.92	15.0	19.4	22.8	25.0	25.8	25.0
50		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.70	4.35	6.47	7.85	8.42	8.18	7.19
55		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	1.93	3.05	3.82	4.19	4.14	3.73
60		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.0612A P:7.821W PF:0.4608 Lamp Flux:296.307x1 lm		
NAME: 8.02.019.0069 30°LLS-OP-W30B-L12-RDM (AL) -TYPE:LED		WEIGHT:
DIM.:		SERIAL No.:2024010114
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	4.63	3.61	2.17	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	8.94	6.71	3.70	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	25.4	21.7	16.6	10.9	6.33	2.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	40.6	34.8	27.2	19.1	11.1	4.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	71.5	62.1	49.1	35.5	23.1	12.6	4.63	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	99.4	84.5	65.4	46.6	30.5	17.5	7.44	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	156	133	103	72.6	47.5	28.6	14.7	4.61	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	206	170	128	87.6	56.1	33.4	17.4	6.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	320	257	188	127	79.6	47.0	25.2	10.7	1.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	411	317	223	145	88.1	50.2	26.2	10.8	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	509	392	275	179	107	61.1	32.0	14.1	2.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	563	419	286	181	104	57.9	29.3	12.1	1.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	540	413	288	186	110	61.9	31.8	13.6	2.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	469	355	245	156	92.5	51.4	25.5	9.67	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	366	290	208	137	83.4	47.1	23.5	8.68	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	236	192	141	93.5	57.3	31.6	14.4	3.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	175	147	111	75.1	46.5	25.5	11.0	2.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	105	87.3	65.6	44.0	26.2	12.7	3.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	72.9	61.6	46.8	31.4	17.9	7.69	2.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	37.5	30.4	21.7	12.9	5.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	22.2	17.7	12.0	7.31	3.26	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	5.40	2.90	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	2.91	1.72	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-25

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: