


LED Test Report

Product Mark

Product Type :LLS-OP-W30B-L12-RDM (AL) -BManufacturer :TPK
Temperature :14.6'C Humidity :35%
Operator :qc1 Test Date :2024-01-25 16:40:19
Remark:LLS-OP-W30B-L12-RDM (AL) 8.02.019.0069 30°

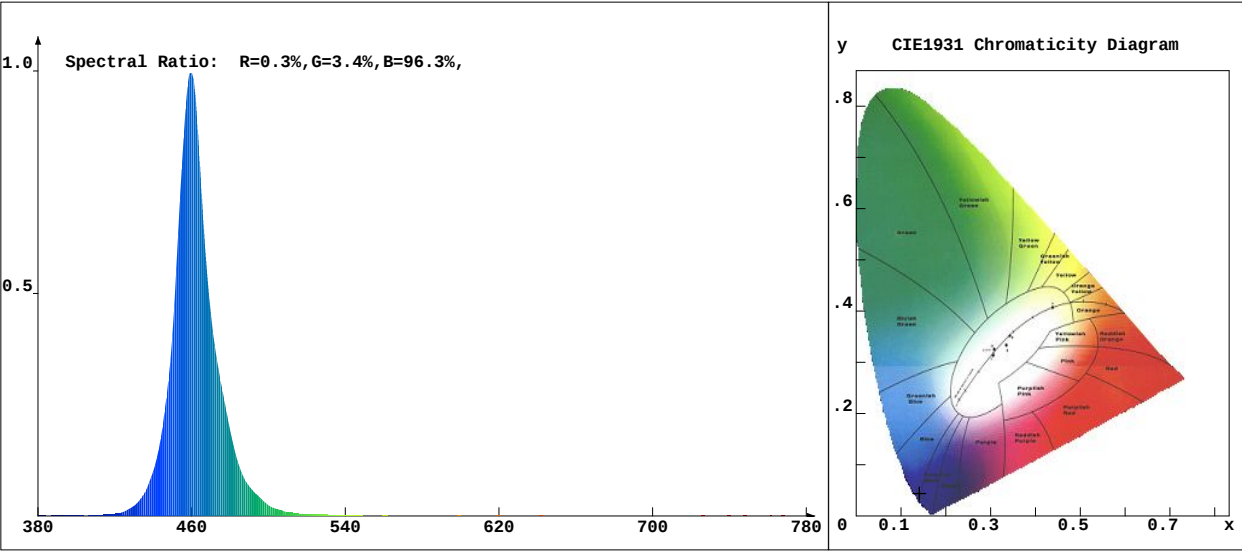

Chroma Parameters

Chro.Coor.:x=0.1410 y=0.0440 u=0.1737 v=0.0814 duv=-0.0390
CCT:100000K Dominant Wave.:464.2nm Purity:97.9%
Flux RGB Ratio:R=0.5%,G=16.2%,B=83.3% Peak Wave:459.6nm Half Width:17.8nm

Rendering Index:Ra=-57.6

R1 =-15 R2 =-53 R3 =-149 R4 =-89 R5 =-1 R6 =-62 R7 =-53 R8 =-38
R9 =-274 R10=-248 R11=-119 R12=-119 R13=-37 R14=-35 R15=1

Photo Parameters

Flux:63.52lm Effi.:8.3lm/W Radiant:1070.9mW Iv:0.0mcd
Efficiency:0.753 Effi Level:C (EU 874-2012)

Ele. Parameters

Voltage:U=120.100V Current:I=0.1170A
Power:P=7.62W Power Factor:PF=0.540

Instrument state

Instrument:Hopoo HP8000S Integral Time: 59.284ms VPeak: 15401
VDark: 1250 Scan Range: 380-780nm Product ID: 201605038