


LED Test Report

Product Mark

Product Type :LLS-OP-W30B-L12-RDM (AL) -BManufacturer :TPK
Temperature :14.6'C Humidity :35%
Operator :qc1 Test Date :2024-01-25 16:34:30
Remark:LLS-OP-W30B-L12-RDM (AL) 8.02.019.0069 30°

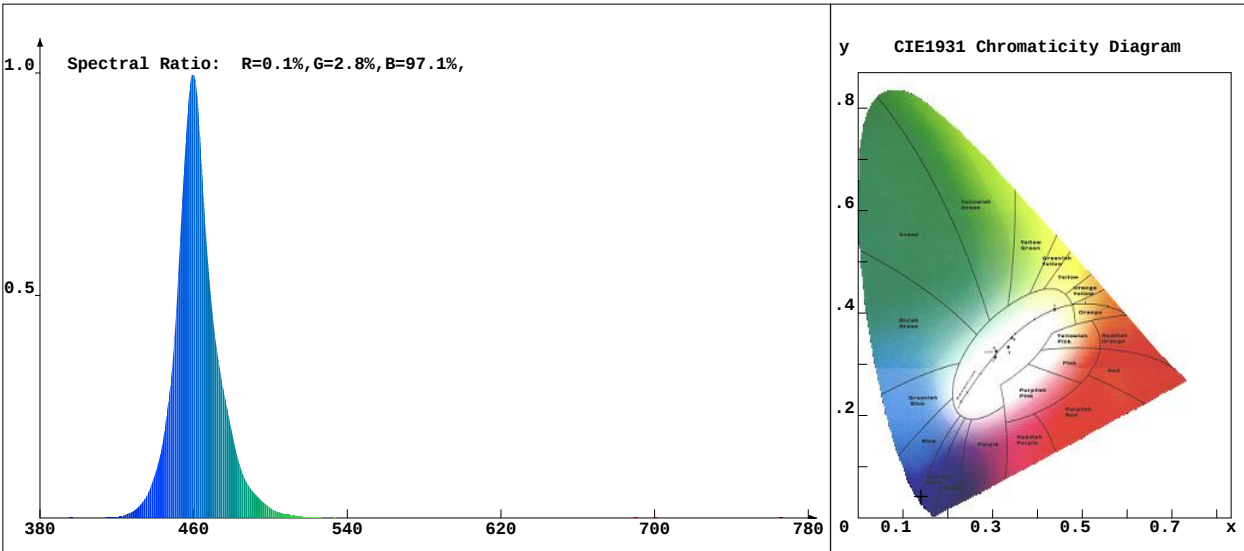

Chroma Parameters

Chro.Coor.:x=0.1405 y=0.0421 u=0.1743 v=0.0784 duv=-0.0404
CCT:100000K Dominant Wave.:464.0nm Purity:98.4%
Flux RGB Ratio:R=0.1%,G=11.9%,B=88.1% Peak Wave:459.6nm Half Width:17.4nm

Rendering Index:Ra=-63.3

R1 =-26 R2 =-66 R3 =-159 R4 =-87 R5 =-2 R6 =-69 R7 =-56 R8 =-40
R9 =-298 R10=-285 R11=-116 R12=-131 R13=-52 R14=-40 R15=-9

Photo Parameters

Flux:63.69lm Effi.:8.2lm/W Radiant:1054.0mW Iv:0.0mcd
Efficiency:0.767 Effi Level:C (EU 874-2012)

Ele. Parameters

Voltage:U=277.200V Current:I=0.0610A
Power:P=7.78W Power Factor:PF=0.458

Instrument state

Instrument:Hopoo HP8000S Integral Time: 51.559ms VPeak: 13625
VDark: 1273 Scan Range: 380-780nm Product ID: 201605038