


LED Test Report

Product Mark

Product Type :LLS-OP-W30B-L12-RDM (AL) -GManufacturer :TPK
Temperature :14.6'C Humidity :35%
Operator :qc1 Test Date :2024-01-25 16:32:08
Remark:LLS-OP-W30B-L12-RDM (AL) 8.02.019.0069 30°

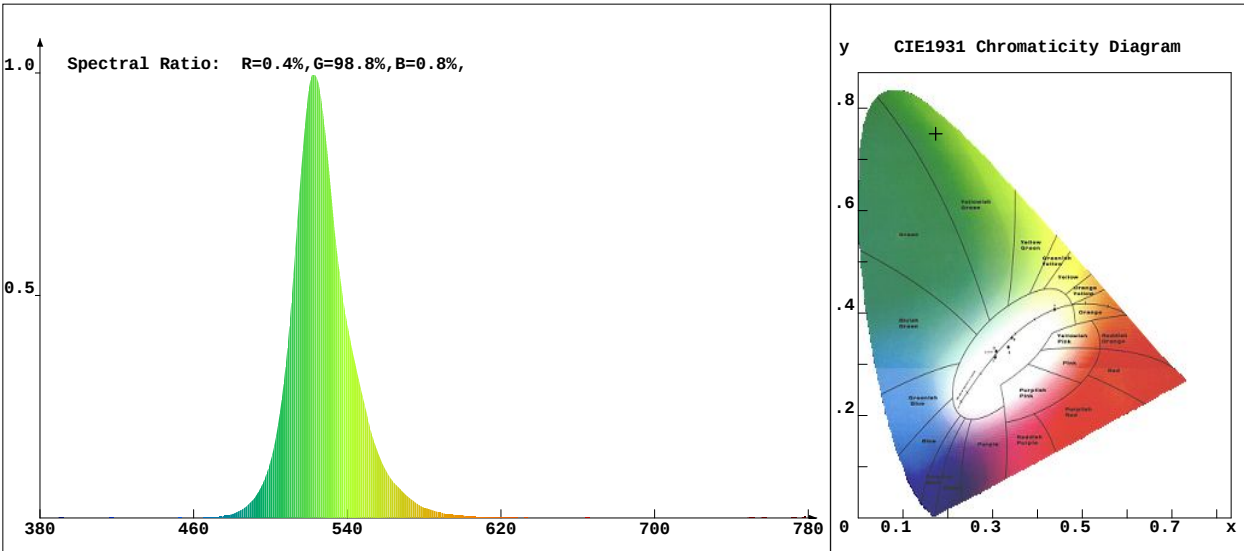

Chroma Parameters

Chro.Coord.:x=0.1733 y=0.7504 u=0.0595 v=0.3862 duv=0.1595
CCT: 7681K Dominant Wave.:529.6nm Purity:87.9%
Flux RGB Ratio:R=0.1%,G=99.7%,B=0.2% Peak Wave:522.2nm Half Width:26.5nm

Rendering Index:Ra=-32.1

R1 =-37 R2 =-18 R3 =-40 R4 =-76 R5 =-14 R6 =-22 R7 =-13 R8 =-35
R9 =-367 R10=-127 R11=-108 R12=-45 R13=-45 R14=29 R15=-35

Photo Parameters

Flux:372.92lm Effi.:47.9lm/W Radiant:623.0mW Iv:0.0mcd
Efficiency:0.221 Effi Level:A (EU 874-2012)

Ele. Parameters

Voltage:U=276.900V Current:I=0.0610A
Power:P=7.79W Power Factor:PF=0.459

Instrument state

Instrument:Hopoo HP8000S Integral Time: 146.191ms VPeak: 15593
VDark: 1277 Scan Range: 380-780nm Product ID: 201605038