


LED Test Report

Product Mark

Product Type :LLS-OP-W30B-L12-RDM (AL) -WManufacturer :TPK
Temperature :14.6'C Humidity :35%
Operator :qc1 Test Date :2024-01-25 16:35:34
Remark:LLS-OP-W30B-L12-RDM (AL) 8.02.019.0069 30°

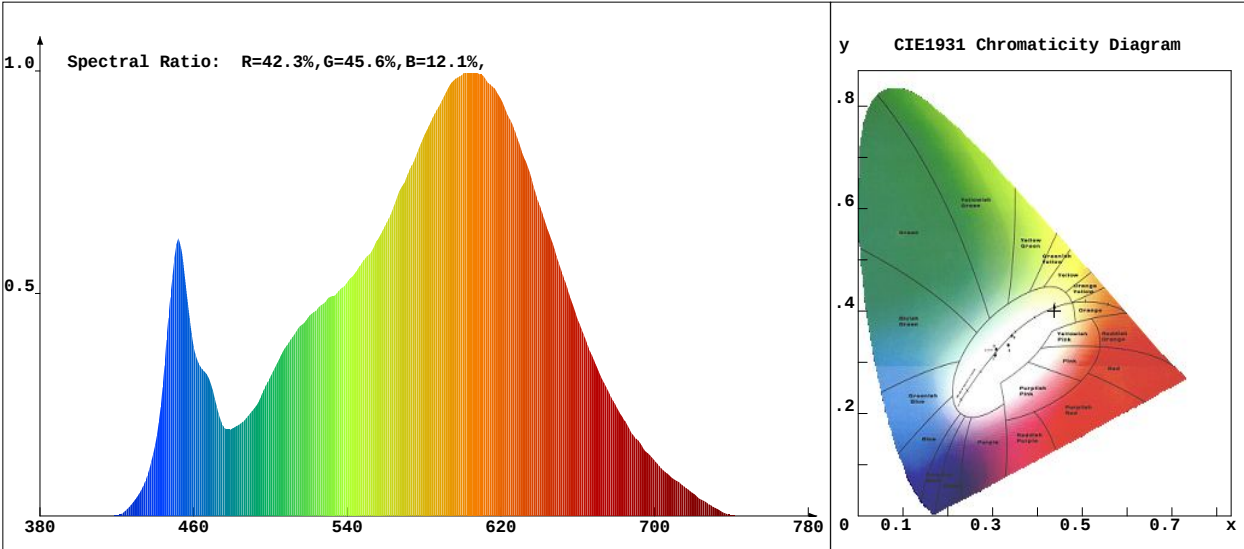

Chroma Parameters

Chro.Coord.:x=0.4372 y=0.4003 u=0.2524 v=0.3466 duv=-0.0016
CCT: 2964K Dominant Wave.:583.5nm Purity:51.4%
Flux RGB Ratio:R=23.3%,G=75.0%,B=1.7% Peak Wave:601.7nm Half Width:120.8nm

Rendering Index:Ra= 82.8

R1 =81	R2 =92	R3 =96	R4 =82	R5 =84	R6 =92	R7 =80	R8 =57
R9 =7	R10=82	R11=81	R12=73	R13=83	R14=99	R15=73	

Photo Parameters

Flux:308.12lm Effi.:39.9lm/W Radiant:813.0mW Iv:0.0mcd
Efficiency:0.253 Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.400V Current:I=0.0600A
Power:P=7.72W Power Factor:PF=0.458

Instrument state

Instrument:Hopoo HP8000S	Integral Time: 518.716ms	VPeak: 12921
VDark: 1342	Scan Range: 380-780nm	Product ID: 201605038