

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	523.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	130.6V x 91.2H
	At 50% of Imax	99.5V x 85.6H
	At 90% of Imax	52.3V x 53.2H

Beam Flux	Total	995.8 lumens per klm.
	To 10% of Imax	988.1 lumens per klm.
	To 50% of Imax	876.4 lumens per klm.
	To 90% of Imax	348.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-13

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.3007A P:7.217W PF:1.000 Lamp Flux:78.105x1 lm		
NAME: 8.02.019.0053 LLS-OP-W30C-L10-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

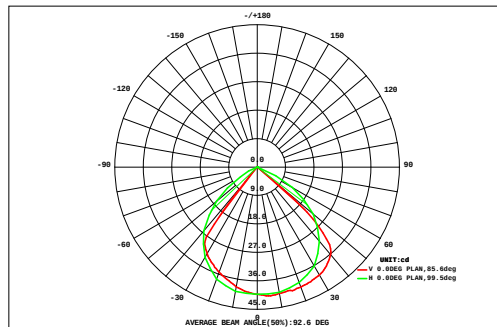

DATA OF LAMP		Eff:10.82lm/W	
MODELLS-OP-W30C-L10-DMX		Imax(cd)	40.91
NOMINAL POWER(W)	7	AVAILABILITY(%)	99.4
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	77.67
NOMINAL FLUX(lm)	78.105	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	78.11
TEST VOLTAGE(V)	24.0	θ @50%(H,V)	86,100DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.11	0.14	0.16	0.16	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.72	0.68
60	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.44	0.53	0.56	0.55	0.49	0.14	0.00	0.00	0.00	0.00	0.00	2.88	2.88
50	0.00	0.00	0.00	0.00	0.00	0.04	0.53	0.71	0.81	0.84	0.82	0.76	0.52	0.03	0.00	0.00	0.00	0.00	5.06	5.05
40	0.00	0.00	0.00	0.00	0.00	0.21	0.77	0.90	1.00	1.03	1.00	0.93	0.78	0.18	0.00	0.00	0.00	0.00	6.81	6.80
30	0.00	0.00	0.00	0.00	0.00	0.44	0.87	1.03	1.13	1.16	1.12	1.04	0.89	0.39	0.00	0.00	0.00	0.00	8.07	8.06
20	0.00	0.00	0.00	0.00	0.01	0.57	0.92	1.08	1.18	1.21	1.17	1.08	0.93	0.52	0.00	0.00	0.00	0.00	8.68	8.67
10	0.00	0.00	0.00	0.00	0.02	0.62	0.93	1.09	1.20	1.23	1.19	1.10	0.95	0.60	0.00	0.00	0.00	0.00	8.93	8.91
0	0.00	0.00	0.00	0.00	0.02	0.61	0.92	1.08	1.19	1.23	1.19	1.10	0.95	0.60	0.00	0.00	0.00	0.00	8.89	8.87
-10	0.00	0.00	0.00	0.00	0.01	0.52	0.89	1.04	1.16	1.20	1.17	1.08	0.93	0.52	0.00	0.00	0.00	0.00	8.53	8.51
-20	0.00	0.00	0.00	0.00	0.00	0.36	0.81	0.95	1.06	1.09	1.07	0.98	0.84	0.36	0.00	0.00	0.00	0.00	7.51	7.50
-30	0.00	0.00	0.00	0.00	0.00	0.13	0.65	0.78	0.88	0.92	0.90	0.83	0.68	0.16	0.00	0.00	0.00	0.00	5.93	5.92
-40	0.00	0.00	0.00	0.00	0.00	0.01	0.38	0.56	0.65	0.68	0.66	0.61	0.39	0.02	0.00	0.00	0.00	0.00	3.95	3.94
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.26	0.34	0.36	0.36	0.30	0.09	0.00	0.00	0.00	0.00	0.00	1.80	1.76
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.09	0.09	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.31	0.12
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	
Φ t	0.00	0.00	0.00	0.00	0.05	3.52	7.96	10.1	11.3	11.8	11.5	10.5	8.10	3.39	0.00	0.00	0.00	0.00	78	---
Φ a	0.00	0.00	0.00	0.00	0.00	3.46	7.93	10.0	11.3	11.7	11.4	10.4	8.08	3.37	0.00	0.00	0.00	0.00	---	78


one-half-peak spread: U:46.7,D:53.3 , L:42.5, ~~NEPA~~ Beam Type: Type 5 x 7 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-13

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3007A P:7.217W PF:1.000 Lamp Flux:78.105x1 lm		
NAME: 8.02.019.0053 LLS-OP-W30C-L10-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

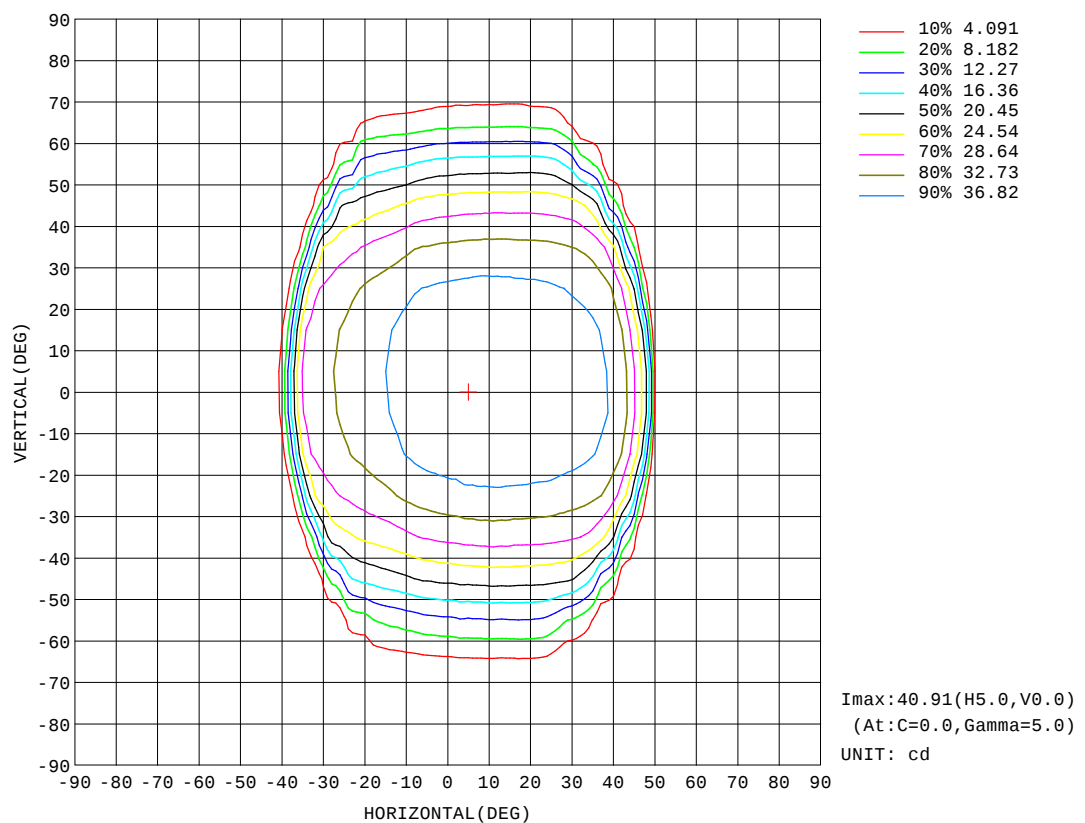


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-13

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.3007A P:7.217W PF:1.000 Lamp Flux:78.105x1 lm		
NAME: 8.02.019.0053 LLS-OP-W30C-L10-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

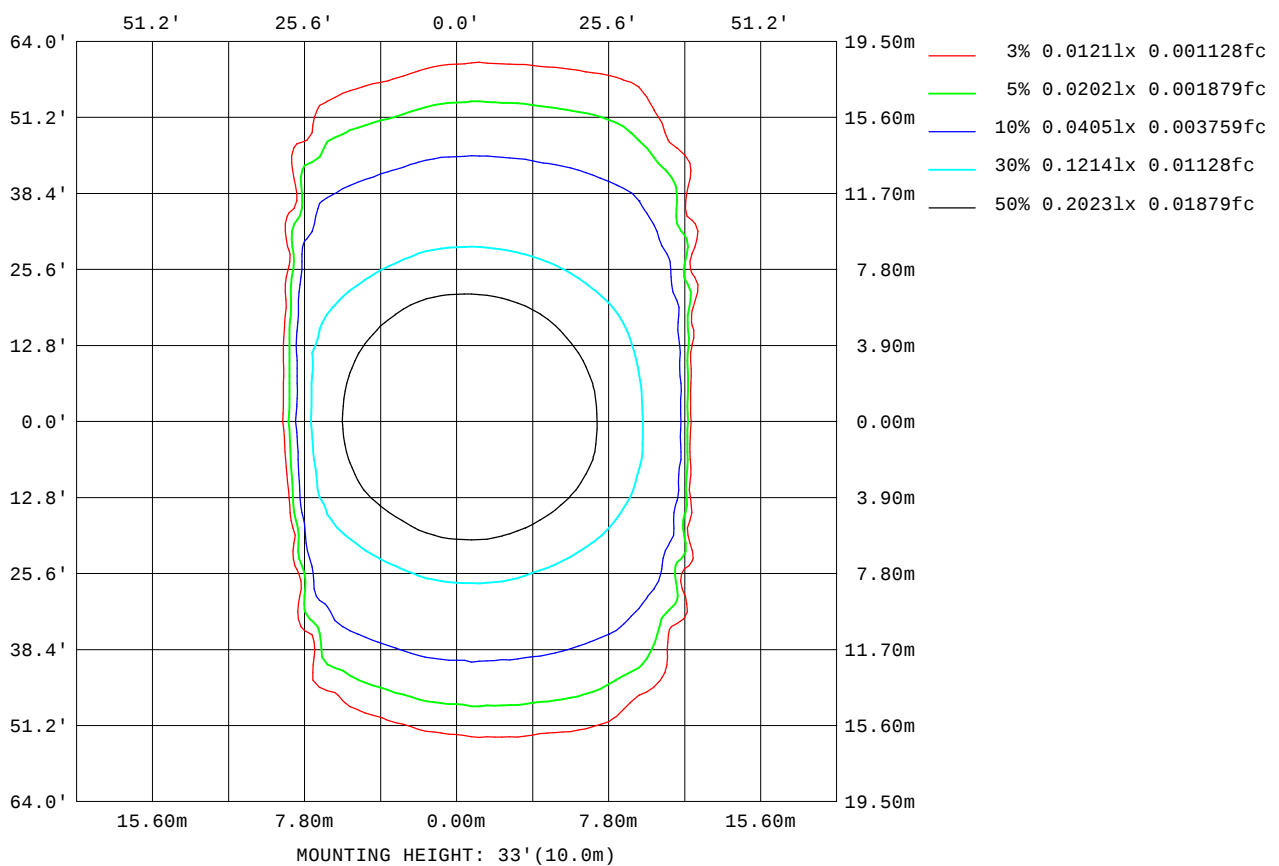


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-13

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3007A P:7.217W PF:1.000 Lamp Flux:78.105x1 lm		
NAME: 8.02.019.0053 LLS-OP-W30C-L10-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:57.63 lm

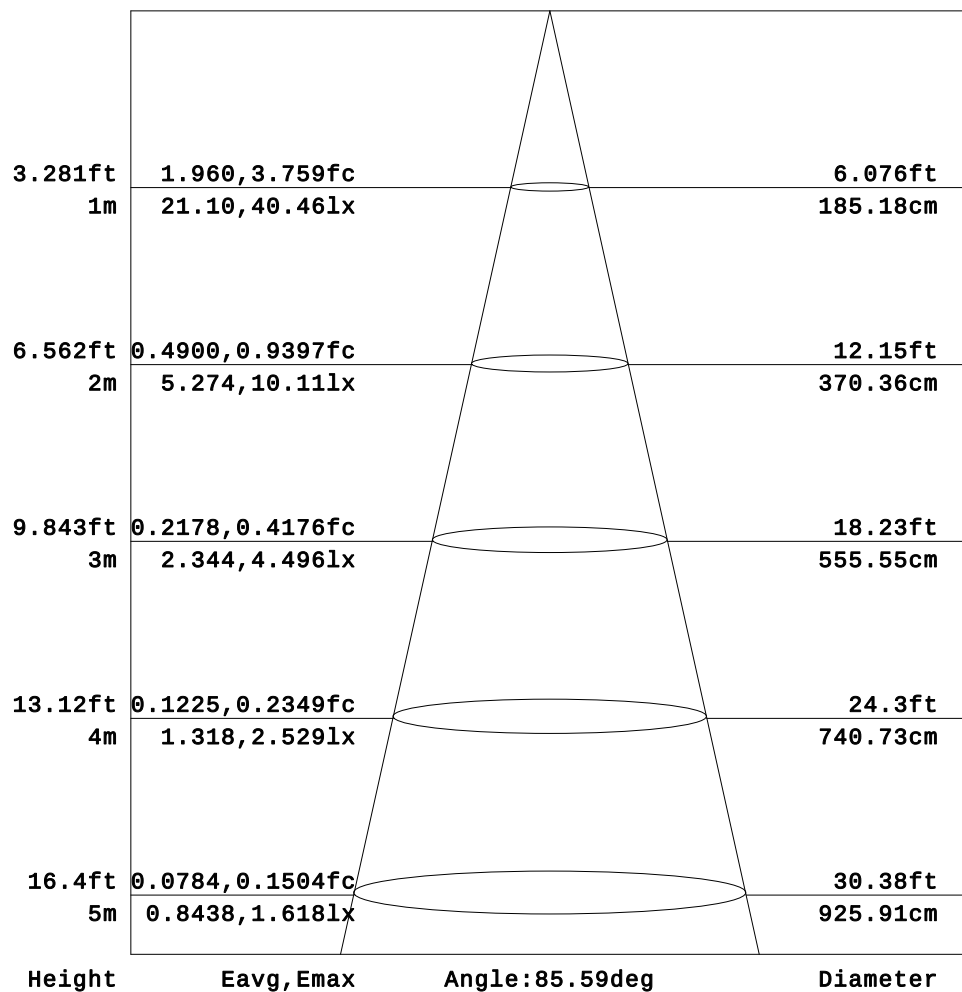


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 30.3DEG
Operators: QC1
Test Date: 2023-07-13

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 50%
Test Distance: 8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

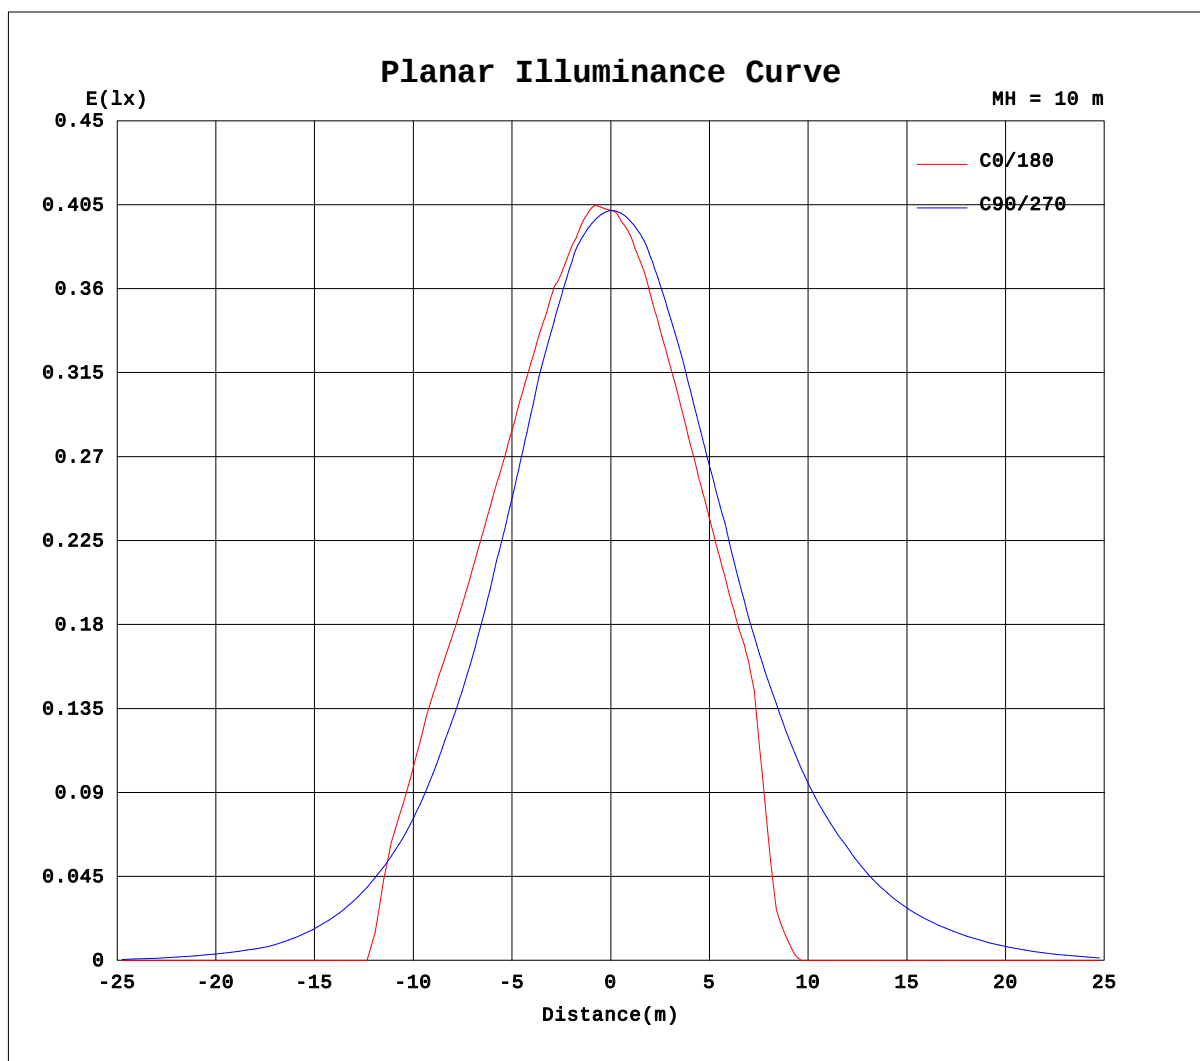

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-07-13

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:50%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3007A P:7.217W PF:1.000 Lamp Flux:78.105x1 lm		
NAME: 8.02.019.0053 LLS-OP-W30C-L10-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.89	2.42	2.86	3.08
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.78	4.83	5.72	6.15
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.21	6.37	8.93	10.0	11.1
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.42	12.7	14.1	15.2	16.5	16.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.02	13.5	17.5	18.7	19.8	21.0	21.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.0	20.5	22.2	23.3	24.4	25.6	26.3
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.45	17.3	23.6	25.3	26.4	27.8	28.9	29.7
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.90	24.6	26.6	28.4	29.6	31.1	32.2	33.0
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.69	12.8	26.8	29.0	30.6	31.9	33.6	34.7	35.4
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.37	20.6	29.1	31.4	32.8	34.2	36.0	37.2	37.7
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.87	24.2	30.1	32.3	33.8	35.3	37.0	38.2	38.8
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.37	27.8	31.1	33.1	34.8	36.3	37.9	39.3	39.9
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.23	28.5	31.4	33.4	35.1	36.5	38.2	39.4	40.1
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.09	29.1	31.7	33.7	35.4	36.8	38.4	39.6	40.2
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.54	28.9	31.6	33.7	35.4	36.8	38.4	39.5	40.2
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.99	28.6	31.4	33.7	35.4	36.8	38.4	39.4	40.2
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.96	27.3	30.9	33.1	34.9	36.4	37.8	38.8	39.5
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.93	25.9	30.4	32.6	34.4	35.9	37.2	38.3	38.8
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.46	18.7	29.0	31.3	33.2	34.6	36.0	37.0	37.5
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.6	27.7	30.0	32.0	33.3	34.9	35.7	36.2
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.86	24.5	27.2	28.9	30.3	31.8	32.8	33.4
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	21.3	24.4	25.7	27.4	28.7	30.0	30.6	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.7	20.8	22.3	23.6	25.0	26.4	26.9	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	17.2	19.0	19.9	21.2	22.8	23.2	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.59	13.7	14.9	15.9	17.4	18.0	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.51	9.84	10.5	11.9	12.8	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.25	4.92	5.27	5.97	6.55	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.3DEG
 Operators:QC1
 Test Date:2023-07-13

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:50%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3007A P:7.217W PF:1.000 Lamp Flux:78.105x1 lm		
NAME: 8.02.019.0053 LLS-OP-W30C-L10-DMX-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023070035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	3.32	3.44	3.39	3.43	2.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	6.64	6.88	6.78	6.86	4.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	11.8	12.2	12.2	12.2	10.9	7.93	3.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	17.0	17.4	17.6	17.5	16.9	15.9	7.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	21.9	22.3	22.3	22.1	21.7	20.8	15.7	7.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	26.8	27.1	27.0	26.7	26.5	25.7	23.6	14.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	30.2	30.5	30.4	30.1	29.8	29.0	27.4	20.6	5.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	33.6	33.8	33.7	33.6	33.2	32.4	31.2	26.7	11.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	36.0	36.1	36.0	35.8	35.5	34.7	33.5	30.0	17.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	38.3	38.3	38.3	38.1	37.8	37.0	35.8	33.4	23.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	39.4	39.5	39.5	39.2	39.0	38.2	37.0	34.9	26.2	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	40.5	40.7	40.6	40.4	40.3	39.5	38.2	36.3	28.8	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	40.7	40.6	40.5	40.4	40.1	39.4	38.2	36.2	29.1	3.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	40.9	40.5	40.4	40.4	40.0	39.4	38.2	36.1	29.3	5.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	40.8	40.5	40.4	40.3	40.0	39.3	38.1	36.2	28.9	4.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	40.6	40.4	40.4	40.3	40.0	39.2	38.1	36.2	28.5	2.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	39.9	39.9	39.8	39.6	39.2	38.4	37.4	35.1	26.5	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	39.2	39.3	39.2	38.9	38.4	37.7	36.7	34.0	24.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	37.9	38.0	37.9	37.7	37.3	36.5	35.4	32.0	20.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	36.5	36.8	36.6	36.5	36.1	35.2	34.0	30.1	16.1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	33.7	33.9	33.9	33.7	33.5	32.7	31.3	24.9	8.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	31.0	31.1	31.2	31.0	30.8	30.2	28.6	19.8	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	27.3	27.4	27.4	27.5	27.2	26.5	22.5	9.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	23.6	23.7	23.6	23.9	23.5	22.8	16.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	18.3	18.5	18.4	18.7	18.1	14.5	8.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	13.0	13.2	13.2	13.5	12.7	6.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	6.76	6.96	7.07	6.74	6.36	3.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.52	0.69	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.26	0.34	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.3DEG
 Operators:QC1
 Test Date:2023-07-13

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:50%
 Test Distance:8.300m [K=1.0000]
 Remarks: