

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1686.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	86.3V x 75.7H
	At 50% of Imax	44.0V x 34.1H
	At 90% of Imax	16.6V x 12.4H
Beam Flux	Total	999.2 lumens per klm.
	To 10% of Imax	882.7 lumens per klm.
	To 50% of Imax	425.1 lumens per klm.
	To 90% of Imax	75.5 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.6923A P:16.61W PF:1.000 Lamp Flux:357.691x1 lm		
NAME: 8.02.019.0070 30x40°LLS-0P-W30C-L12-DMX(GAB定制)LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

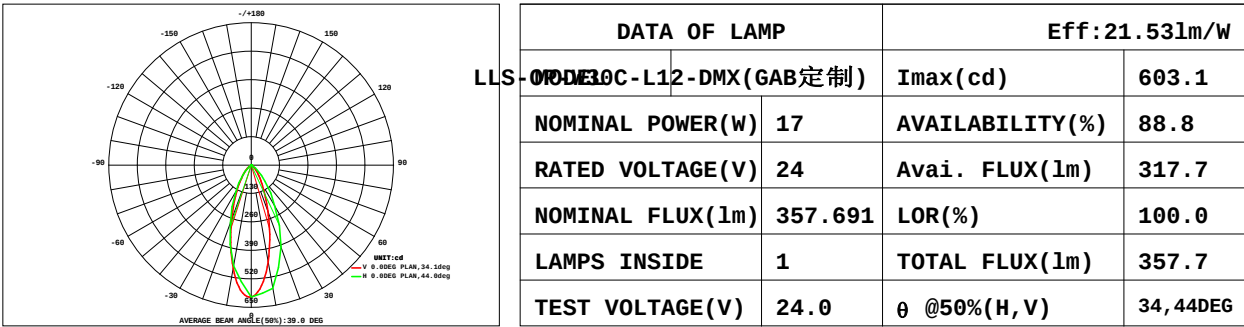

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00	
	64	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.15	0.18	0.17	0.13	0.07	0.01	0.00	0.00	0.00	0.00	0.83	0.00	
	56	0.00	0.00	0.00	0.04	0.13	0.26	0.41	0.53	0.60	0.57	0.47	0.33	0.19	0.08	0.01	0.00	0.00	3.64	0.00	
	48	0.00	0.00	0.02	0.13	0.33	0.59	0.89	1.19	1.35	1.29	1.04	0.72	0.44	0.22	0.07	0.01	0.00	8.30	3.57	
	40	0.00	0.00	0.08	0.28	0.57	1.01	1.58	2.21	2.62	2.51	1.94	1.27	0.75	0.40	0.17	0.03	0.00	15.4	12.3	
	32	0.00	0.01	0.14	0.40	0.84	1.52	2.51	3.74	4.63	4.44	3.30	2.04	1.14	0.59	0.27	0.08	0.00	25.6	23.2	
	24	0.00	0.02	0.19	0.52	1.10	2.08	3.65	5.82	7.52	7.20	5.15	2.95	1.53	0.77	0.35	0.12	0.01	39.0	36.9	
		0.00	0.03	0.22	0.58	1.25	2.47	4.52	7.51	10.1	9.75	6.83	3.73	1.86	0.91	0.41	0.14	0.01	50.3	48.4	
		0.00	0.04	0.23	0.60	1.32	2.63	4.92	8.35	11.4	11.0	7.69	4.15	2.02	0.98	0.44	0.16	0.02	55.9	54.1	
		0.00	0.03	0.22	0.58	1.26	2.50	4.65	7.88	10.7	10.4	7.32	4.01	1.96	0.95	0.43	0.15	0.02	53.1	51.2	
		0.00	0.02	0.18	0.50	1.08	2.09	3.75	6.09	8.15	8.06	5.83	3.33	1.72	0.85	0.39	0.14	0.01	42.2	40.1	
	-24	0.00	0.01	0.13	0.39	0.85	1.57	2.67	4.09	5.25	5.15	3.86	2.36	1.29	0.66	0.31	0.10	0.00	28.7	26.4	
-32	0.00	0.00	0.07	0.27	0.59	1.08	1.76	2.55	3.14	3.09	2.41	1.57	0.91	0.48	0.22	0.05	0.00	18.2	15.4		
-40	0.00	0.00	0.02	0.14	0.35	0.66	1.02	1.39	1.63	1.61	1.31	0.92	0.57	0.30	0.12	0.02	0.00	10.1	6.08		
-48	0.00	0.00	0.00	0.04	0.15	0.32	0.51	0.66	0.73	0.71	0.61	0.45	0.29	0.14	0.04	0.00	0.00	4.65	0.00		
-56	0.00	0.00	0.00	0.00	0.02	0.08	0.14	0.20	0.23	0.22	0.19	0.13	0.07	0.02	0.00	0.00	0.00	1.31	0.00		
-64	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.30	0.00		
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72	
Φ t	0.00	0.17	1.51	4.48	9.85	18.9	33.1	52.4	68.3	66.4	48.1	28.1	14.8	7.37	3.22	0.99	0.08	0.00	358	---	
Φ a	0.00	0.00	0.00	0.00	5.89	16.0	30.6	50.3	66.1	64.2	45.9	25.2	11.4	2.02	0.00	0.00	0.00	0.00	---	318	


one-half-peak spread: U:18.9,D:25.4 , L:17.1,R:17.3 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.6923A P:16.61W PF:1.000 Lamp Flux:357.691x1 lm		
NAME: 8.02.019.0070 30x40°LLS-OP-W30C-L12-DMX(GAB定制)LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

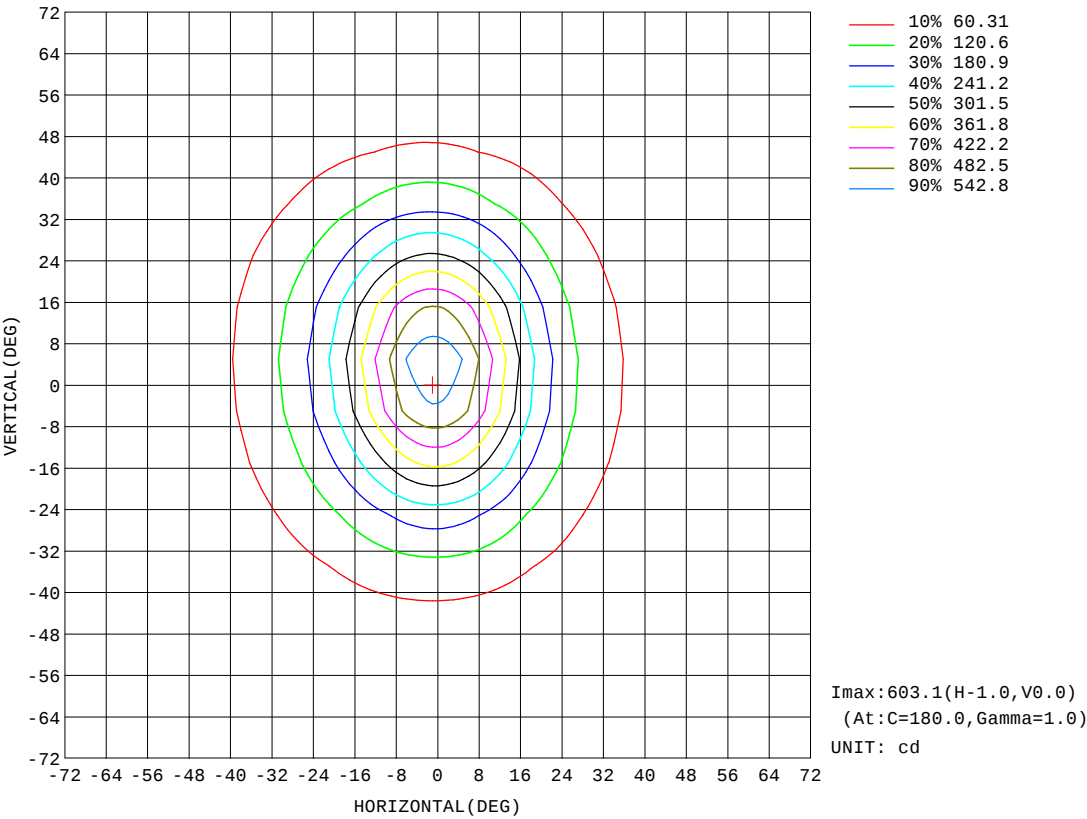


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.6923A P:16.61W PF:1.000 Lamp Flux:357.69lx1 lm		
NAME: 8.02.019.0070 30x40°LLS-0P-W30C-L12-DMX(GAB定制)LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

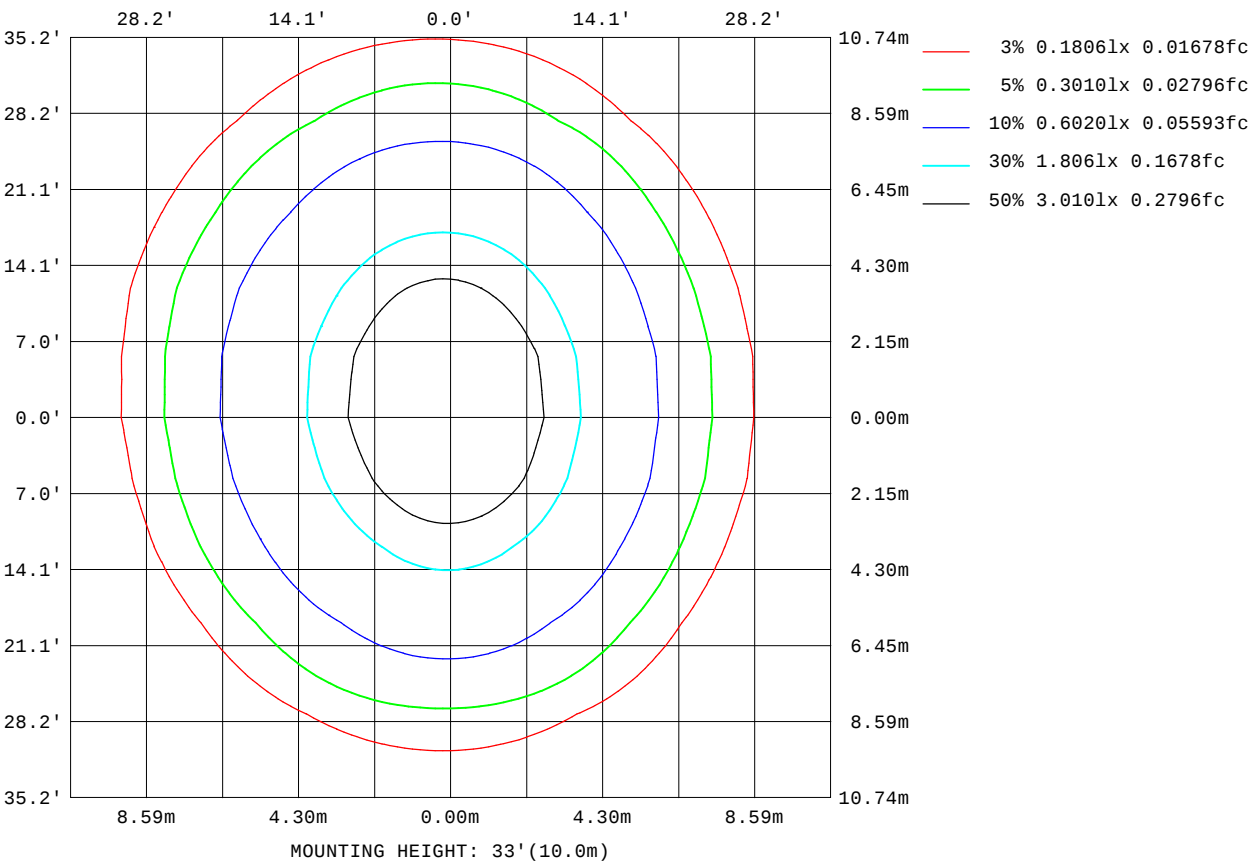


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.6923A P:16.61W PF:1.000 Lamp Flux:357.691x1 lm		
NAME: 8.02.019.0070 30x40°LLS-OP-W30C-L12-DMX(GAB定制)LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

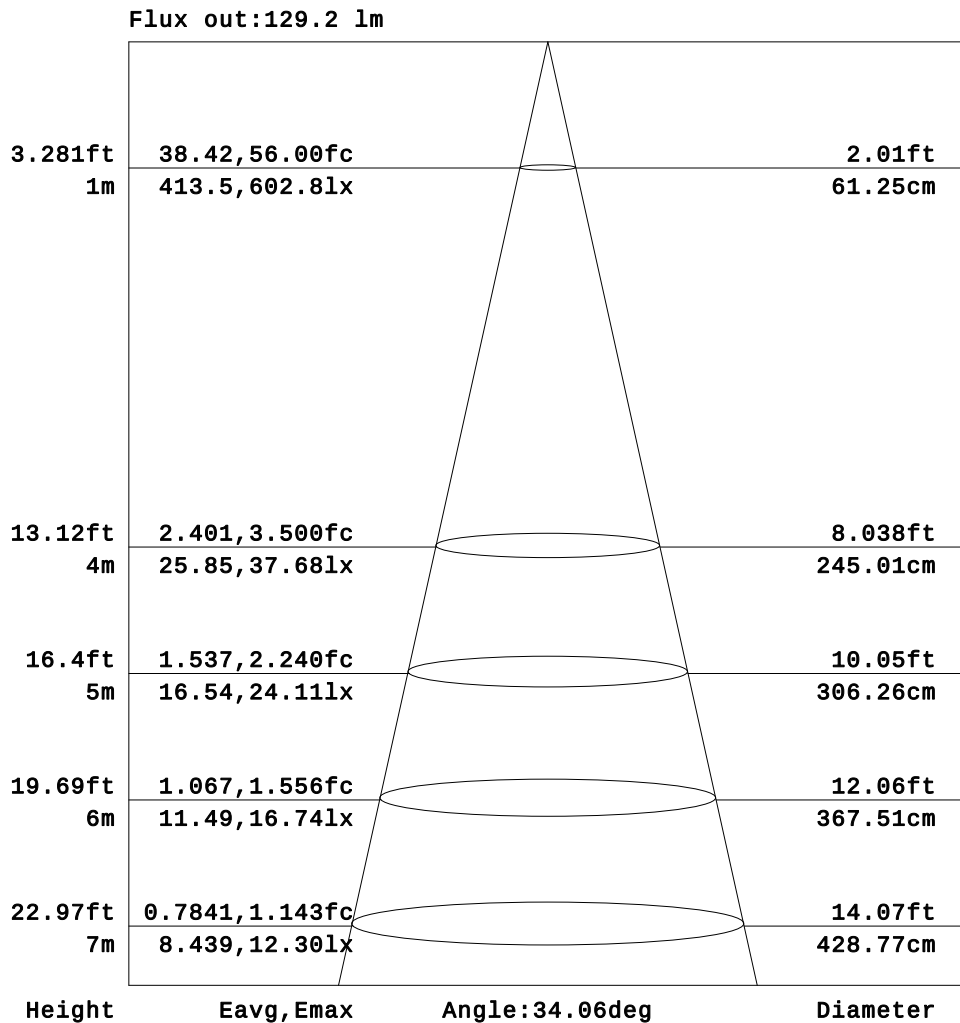


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

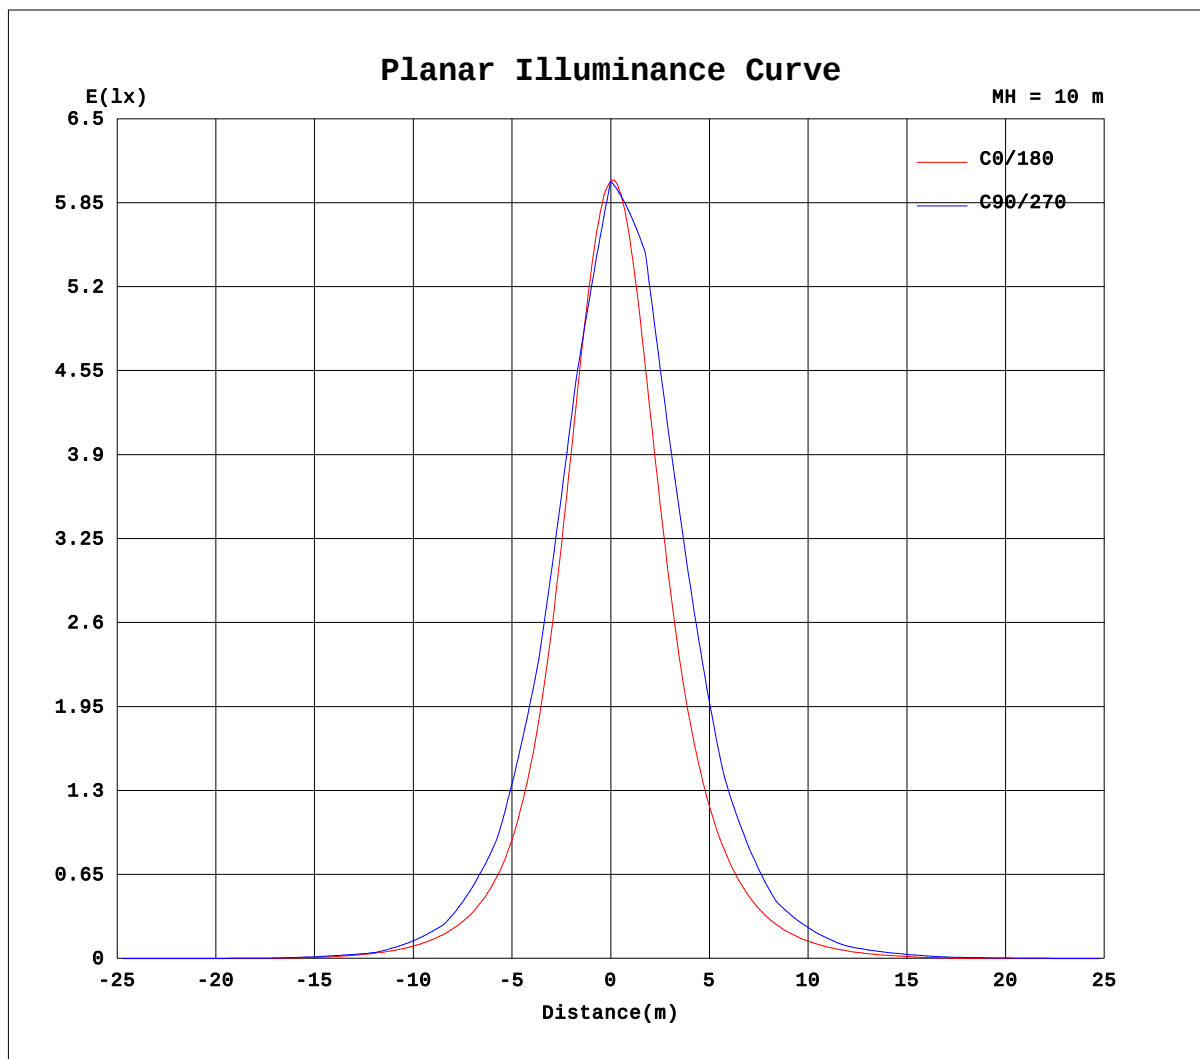

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.6923A P:16.61W PF:1.000 Lamp Flux:357.691x1 lm																	
NAME: 8.02.019.0070 30x40°LLS-OP-W30C-L12-DMX(GAB)定制LED															WEIGHT:		
DIM.:								SPEC.:							SERIAL No.:2024010052		
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:						PROTECTION ANGLE:		

Table--1																		UNIT: cd	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.01	1.63	1.86
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.02	3.27	3.72
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.36	3.13	4.79	6.26	7.52	9.47	10.7	11.0
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.72	6.27	9.59	12.5	15.0	16.9	18.1	18.3
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.42	5.23	9.93	15.5	21.4	27.0	32.2	36.4	39.0	39.5
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.84	10.5	17.1	24.7	33.1	41.5	49.4	55.8	59.9	60.7
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	3.48	9.76	17.2	26.3	37.0	49.2	62.6	76.6	89.3	98.5	101
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	6.95	14.7	23.9	35.5	49.2	65.3	83.7	104	123	137	142
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.93	10.7	20.0	31.4	46.2	64.5	87.0	114	146	178	202	211
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.57	14.5	25.2	38.9	57.0	79.7	109	145	188	233	268	280
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.63	7.60	17.3	29.2	44.9	66.3	94.2	132	180	239	303	356	374
-10	0.00	0.00	0.00	0.00	0.00	0.00	1.27	9.63	20.0	33.2	50.9	75.6	109	155	214	290	374	444	468
-5	0.00	0.00	0.00	0.00	0.00	0.00	2.13	10.8	21.7	35.8	54.8	81.8	119	170	238	327	426	508	535
0	0.00	0.00	0.00	0.00	0.00	0.00	2.99	12.0	23.4	38.4	58.7	88.1	129	184	261	365	478	573	602
5	0.00	0.00	0.00	0.00	0.00	0.00	2.87	11.8	23.1	38.0	58.3	87.2	127	183	258	358	468	559	587
10	0.00	0.00	0.00	0.00	0.00	0.00	2.74	11.6	22.9	37.7	57.9	86.4	126	181	255	350	457	545	572
15	0.00	0.00	0.00	0.00	0.00	0.00	2.10	10.6	21.4	35.4	54.3	80.1	115	163	226	306	395	465	485
20	0.00	0.00	0.00	0.00	0.00	0.00	1.46	9.68	19.9	33.2	50.8	73.9	104	145	198	262	333	385	397
25	0.00	0.00	0.00	0.00	0.00	0.00	0.73	7.57	16.9	28.6	43.6	63.0	87.8	120	161	209	260	298	306
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.46	13.8	24.0	36.4	52.0	71.1	95.1	124	156	188	210	215
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.82	10.1	18.6	28.8	41.2	56.2	74.1	94.9	118	139	154	157
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	6.38	13.3	21.2	30.4	41.3	53.1	66.0	79.2	90.6	97.8	98.6
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	3.19	7.91	14.1	21.2	29.4	38.1	47.0	55.8	63.2	67.7	68.1
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.51	7.10	12.0	17.4	23.0	28.0	32.4	35.8	37.6	37.6
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	3.55	6.01	9.24	13.2	16.7	19.7	22.0	23.3	23.3
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	3.40	5.46	7.05	8.31	8.99	9.07
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	1.70	2.73	3.52	4.15	4.50	4.53
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.6923A P:16.61W PF:1.000 Lamp Flux:357.691x1 lm		
NAME: 8.02.019.0070 30x40°LLS-0P-W30C-L12-DMX(GAB定制)LED		WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2										UNIT: cd												
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90				
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-65	1.70	0.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-60	3.40	1.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-55	10.5	9.07	7.00	5.67	4.24	2.75	1.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-50	17.7	16.2	14.0	11.3	8.47	5.51	2.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-45	37.8	34.3	29.5	24.2	18.7	13.5	8.74	4.59	2.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-40	58.0	52.4	45.0	37.0	29.0	21.5	14.9	9.18	4.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-35	96.2	85.1	70.7	56.0	42.6	31.4	22.1	14.5	8.07	2.79	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-30	134	118	96.3	75.0	56.3	41.2	29.2	19.7	12.0	5.58	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-25	198	170	135	101	73.8	52.8	37.0	25.0	15.7	8.25	2.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-20	262	222	173	128	91.3	64.3	44.7	30.3	19.4	10.9	4.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-15	349	291	221	158	110	75.7	51.9	35.0	22.5	13.0	5.48	0.21	0.00	0.00	0.00	0.00	0.00	0.00				
-10	436	361	268	188	128	87.2	59.0	39.6	25.5	15.0	6.92	0.41	0.00	0.00	0.00	0.00	0.00	0.00				
-5	494	404	298	205	138	92.2	62.2	41.5	26.6	15.7	7.33	0.67	0.00	0.00	0.00	0.00	0.00	0.00				
0	553	447	328	222	147	97.2	65.3	43.4	27.7	16.3	7.74	0.94	0.00	0.00	0.00	0.00	0.00	0.00				
5	538	436	320	217	144	95.8	64.5	42.9	27.3	16.0	7.53	0.78	0.00	0.00	0.00	0.00	0.00	0.00				
10	524	426	312	211	141	94.4	63.6	42.4	27.0	15.8	7.32	0.62	0.00	0.00	0.00	0.00	0.00	0.00				
15	444	363	269	185	125	85.0	57.8	38.6	24.5	14.1	6.18	0.31	0.00	0.00	0.00	0.00	0.00	0.00				
20	364	300	226	159	110	75.7	52.1	34.9	22.0	12.5	5.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
25	282	234	180	130	91.3	64.1	44.5	29.9	18.8	10.2	3.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
30	200	169	133	99.9	73.1	52.6	37.0	24.9	15.5	8.00	1.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
35	146	125	100	76.5	56.8	41.3	29.0	19.3	11.5	5.04	0.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
40	92.3	80.9	66.9	53.0	40.6	30.0	21.1	13.7	7.42	2.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
45	64.0	56.6	47.4	37.9	29.1	21.3	14.5	8.63	3.71	1.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
50	35.8	32.3	27.9	22.7	17.6	12.6	7.90	3.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
55	22.1	19.8	16.8	13.3	9.67	6.28	3.95	1.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
60	8.47	7.31	5.72	3.84	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
65	4.24	3.66	2.86	1.92	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: