

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	627.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	109.6V x 110.4H
	At 50% of Imax	82.9V x 84.5H
	At 90% of Imax	40.3V x 43.6H

Beam Flux	Total	997.4 lumens per klm.
	To 10% of Imax	975.9 lumens per klm.
	To 50% of Imax	810.7 lumens per klm.
	To 90% of Imax	249.3 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-06-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:63%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.1884A P:4.522W PF:1.000 Lamp Flux:166.833x1 lm		
NAME: 8.02.019.0022 LLS-OP-W30C-L6-DMX-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

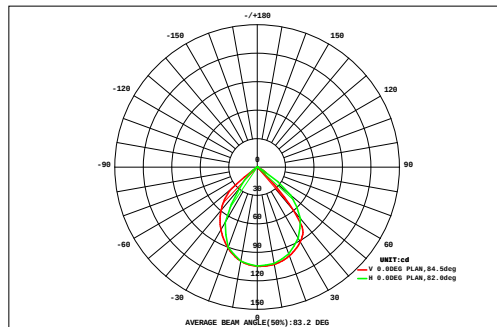

DATA OF LAMP		Eff:36.90lm/W	
MODEL LLS-OP-W30C-L6-DMX		Imax(cd)	104.7
NOMINAL POWER(W)	5	AVAILABILITY(%)	98.1
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	163.6
NOMINAL FLUX(lm)	166.833	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	166.8
TEST VOLTAGE(V)	24.0	θ @50%(H,V)	84,83DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.09	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.31	0.00
50	0.00	0.00	0.00	0.00	0.00	0.15	0.29	0.48	0.62	0.72	0.72	0.51	0.07	0.03	0.00	0.00	0.00	3.59	3.14
40	0.00	0.00	0.00	0.00	0.12	0.69	1.13	1.51	1.76	1.89	1.83	1.55	0.43	0.06	0.04	0.00	0.00	11.0	10.9
30	0.00	0.00	0.00	0.00	0.48	1.22	1.71	2.11	2.36	2.45	2.34	2.06	1.16	0.06	0.11	0.00	0.00	16.1	15.9
20	0.00	0.00	0.00	0.01	0.79	1.46	2.01	2.46	2.74	2.82	2.69	2.37	1.69	0.17	0.14	0.00	0.00	19.4	19.2
10	0.00	0.00	0.00	0.06	0.98	1.63	2.22	2.71	3.01	3.07	2.93	2.57	1.94	0.35	0.13	0.02	0.00	21.6	21.5
0	0.00	0.00	0.00	0.11	1.05	1.70	2.31	2.82	3.12	3.17	3.01	2.65	2.04	0.46	0.12	0.02	0.00	22.6	22.5
-10	0.00	0.00	0.00	0.13	1.04	1.68	2.29	2.79	3.08	3.13	2.97	2.61	2.01	0.46	0.11	0.02	0.00	22.3	22.2
-20	0.00	0.00	0.00	0.08	0.92	1.54	2.11	2.57	2.86	2.93	2.78	2.44	1.81	0.32	0.11	0.01	0.00	20.5	20.3
-30	0.00	0.00	0.00	0.01	0.63	1.21	1.71	2.10	2.37	2.45	2.33	2.05	1.33	0.11	0.12	0.00	0.00	16.4	16.3
-40	0.00	0.00	0.00	0.00	0.22	0.62	0.97	1.27	1.47	1.55	1.50	1.30	0.61	0.04	0.08	0.00	0.00	9.63	9.43
-50	0.00	0.00	0.00	0.00	0.01	0.08	0.22	0.38	0.46	0.55	0.55	0.42	0.09	0.06	0.02	0.00	0.00	2.82	2.28
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.11	0.14	0.11	0.04	0.04	0.02	0.00	0.00	0.00	0.58	0.01
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL(DEG) 20 30 40 50 60 70 80 90																			
Φ t	0.00	0.00	0.00	0.42	6.23	12.0	17.0	21.3	24.0	25.0	23.9	20.6	13.2	2.13	0.98	0.08	0.00	0.00	167
Φ a	0.00	0.00	0.00	0.35	6.14	11.9	16.9	21.1	23.7	24.6	23.6	20.4	13.0	1.78	0.22	0.00	0.00	0.00	164

one-half-peak spread: U:34.4,D:48.8 , L:48.8,R:36.0


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-06-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:63%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.1884A P:4.522W PF:1.000 Lamp Flux:166.833x1 lm		
NAME: 8.02.019.0022 LLS-OP-W30C-L6-DMX-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

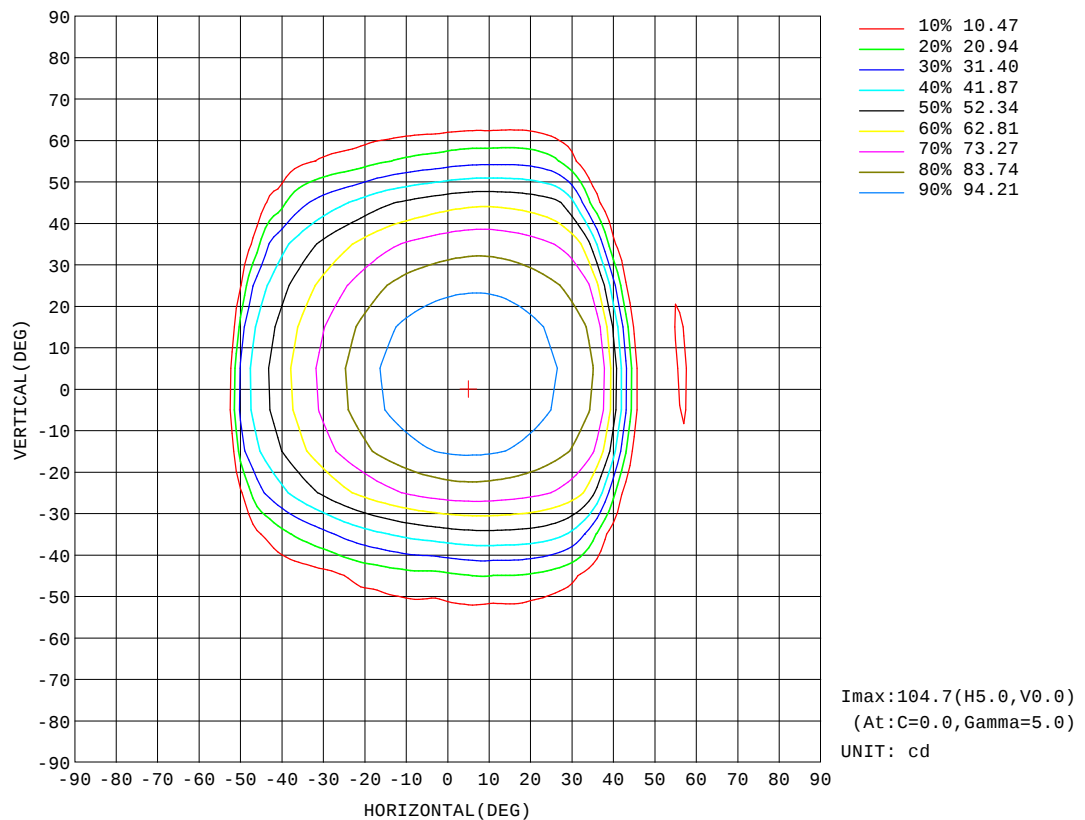


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-06-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:63%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.1884A P:4.522W PF:1.000 Lamp Flux:166.833x1 lm		
NAME: 8.02.019.0022 LLS-OP-W30C-L6-DMX-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

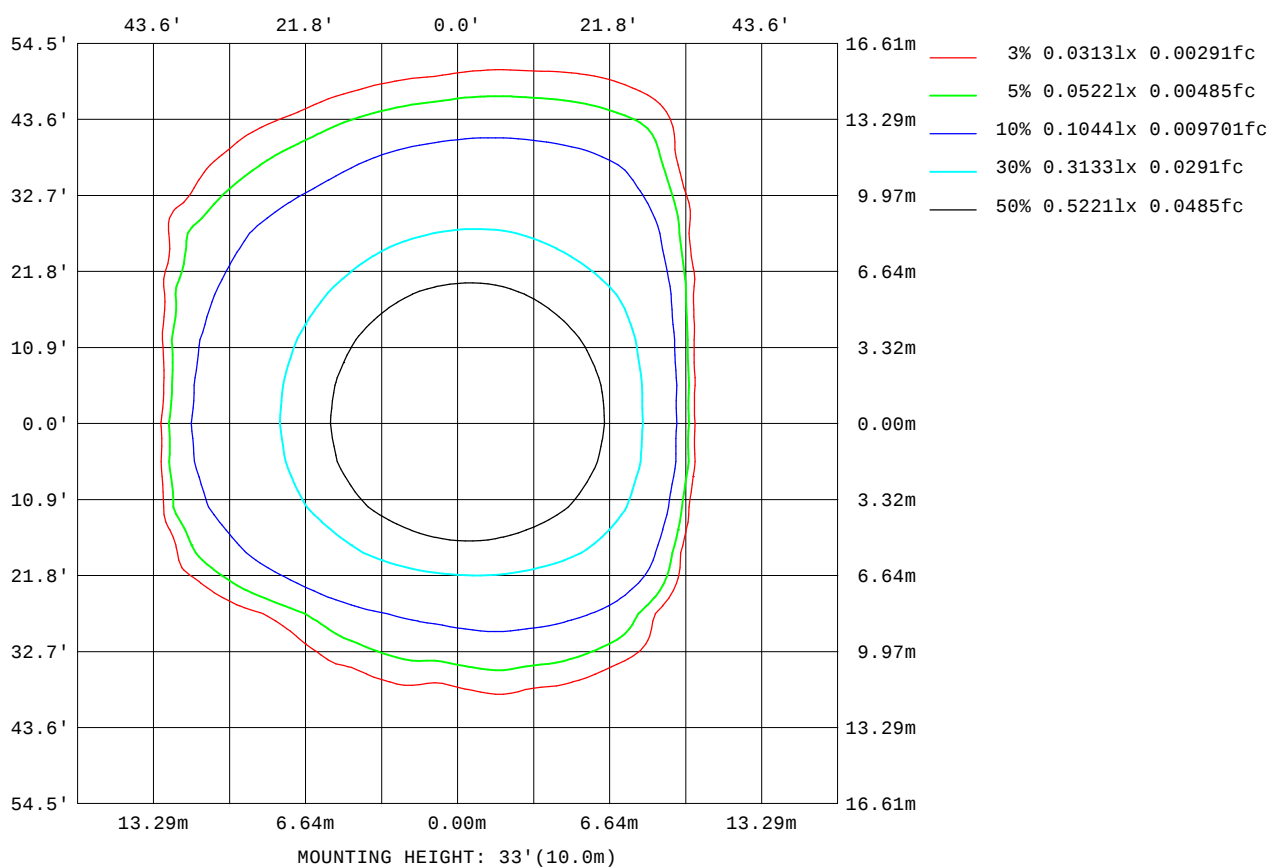


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.3DEG
Operators:QC1
Test Date:2023-06-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:63%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.1884A P:4.522W PF:1.000 Lamp Flux:166.833x1 lm		
NAME: 8.02.019.0022 LLS-OP-W30C-L6-DMX-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:128.0 lm

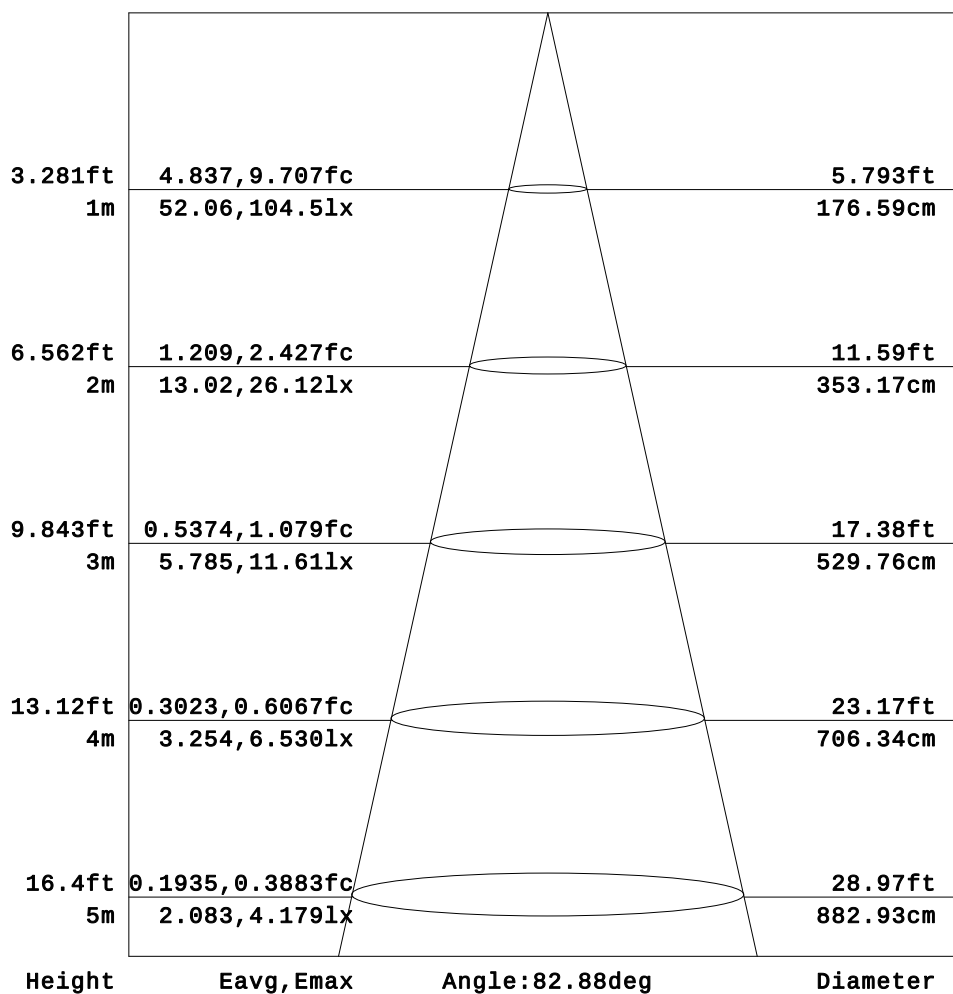


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 30.3DEG
Operators: QC1
Test Date: 2023-06-20

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 63%
Test Distance: 8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

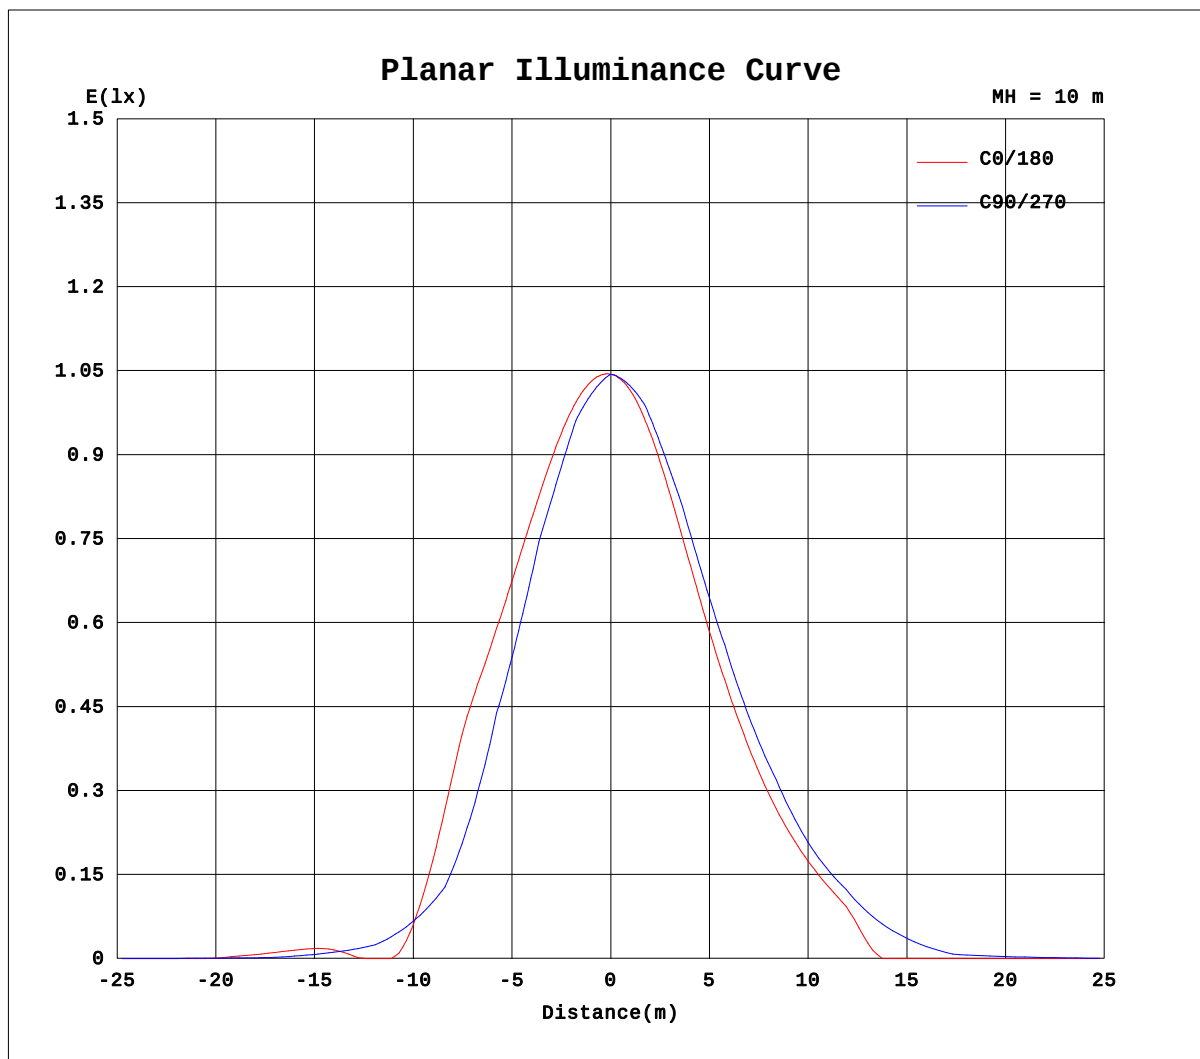

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 30.3DEG
Operators: QC1
Test Date: 2023-06-20

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 63%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1884A P:4.522W PF:1.000 Lamp Flux:166.833x1 lm		
NAME: 8.02.019.0022 LLS-OP-W30C-L6-DMX-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	0.82
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.04	1.65
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	1.77	3.23	3.79	4.64	4.75	5.47
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	3.53	6.45	7.57	9.28	8.46	9.29
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.82	4.94	7.06	10.4	13.5	15.4	17.3	17.6	18.9
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.64	9.88	13.1	17.3	20.6	23.2	25.3	26.8	28.6
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.5	18.1	23.8	28.6	33.9	38.1	41.4	44.2	46.3	48.1
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	21.1	30.6	37.7	44.2	50.5	55.5	59.5	63.1	65.8	67.6
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.90	29.8	39.4	47.2	54.3	60.7	66.0	70.3	74.0	76.8	78.7
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.8	38.4	48.2	56.7	64.3	70.8	76.4	81.1	84.9	87.9	89.7
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	24.9	42.6	52.4	61.1	69.0	75.8	81.8	86.8	90.6	93.5	95.2
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	32.1	46.7	56.5	65.5	73.6	80.9	87.1	92.4	96.3	99.1	101
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	33.6	48.0	58.0	67.0	75.2	82.4	88.9	94.4	98.4	101	103
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	35.2	49.3	59.5	68.6	76.7	83.9	90.6	96.3	101	103	104
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	32.5	48.6	58.8	67.9	76.0	83.3	89.9	95.6	99.9	103	104
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	29.7	47.8	58.1	67.3	75.4	82.7	89.3	94.9	99.2	102	103
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	24.4	45.3	55.8	64.9	72.8	80.0	86.4	91.9	96.1	98.8	100
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	19.0	42.8	53.4	62.4	70.3	77.3	83.6	88.8	92.9	95.6	97.3
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.57	38.6	49.1	58.0	65.6	72.3	78.3	83.4	87.4	90.0	91.8
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	34.5	44.9	53.6	61.0	67.3	73.1	78.0	81.9	84.5	86.3
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	23.0	38.9	47.4	54.5	60.5	66.1	70.7	74.2	76.7	78.7
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.6	33.0	41.2	48.1	53.8	59.0	63.4	66.5	68.9	71.0
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.80	18.0	29.3	35.7	40.8	45.8	50.5	53.8	56.5	58.8
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	17.3	23.3	27.9	32.6	37.6	41.1	44.0	46.6
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.47	8.64	11.7	13.9	16.9	20.1	22.8	24.7	26.6
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.23	2.67	4.47	5.29	6.55
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	1.33	2.23	2.65	3.28
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.3DEG
 Operators:QC1
 Test Date:2023-06-20

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:63%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.1884A P:4.522W PF:1.000 Lamp Flux:166.833x1 lm		
NAME: 8.02.019.0022 LLS-OP-W30C-L6-DMX-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.64	0.00	0.71	0.13	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	1.27	0.00	1.42	0.26	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	6.17	5.43	5.75	4.42	2.97	1.99	1.67	1.43	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	11.1	10.9	10.1	8.59	5.26	3.98	3.34	2.87	1.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	20.6	21.1	20.7	19.7	16.9	12.4	5.21	1.43	2.15	3.04	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	30.2	31.3	31.4	30.9	28.5	20.8	7.08	0.00	2.74	6.08	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	49.4	49.8	49.4	48.3	45.8	39.5	24.1	5.55	1.37	5.17	4.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	68.5	68.3	67.3	65.8	63.2	58.1	41.2	11.1	0.00	4.27	7.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	79.4	79.2	78.0	76.2	73.2	68.3	54.4	23.6	0.79	2.14	8.76	2.62	0.00	0.00	0.00	0.00	0.00	0.00
-20	90.4	90.0	88.8	86.6	83.3	78.5	67.7	36.1	1.57	0.00	9.80	5.24	0.00	0.00	0.00	0.00	0.00	0.00
-15	95.8	95.3	93.8	91.4	87.9	83.1	74.1	45.7	7.71	0.00	9.18	6.50	0.00	0.00	0.00	0.00	0.00	0.00
-10	101	100	98.8	96.2	92.6	87.7	80.6	55.3	13.9	0.00	8.56	7.75	0.00	0.00	0.00	0.00	0.00	0.00
-5	103	102	101	97.9	94.1	89.3	82.4	57.5	15.5	0.00	8.88	7.78	0.00	0.00	0.00	0.00	0.00	0.00
0	105	104	102	99.5	95.7	90.9	84.2	59.6	17.2	0.00	9.20	7.81	0.00	0.00	0.00	0.00	0.00	0.00
5	104	104	102	99.3	95.5	90.6	84.0	58.2	15.8	0.00	9.90	7.47	0.00	0.00	0.00	0.00	0.00	0.00
10	104	103	102	99.0	95.2	90.4	83.8	56.8	14.4	0.00	10.6	7.14	0.00	0.00	0.00	0.00	0.00	0.00
15	101	101	99.1	96.5	92.7	87.9	80.6	50.7	9.35	0.00	10.8	6.19	0.00	0.00	0.00	0.00	0.00	0.00
20	97.9	97.8	96.5	93.9	90.2	85.5	77.5	44.5	4.29	0.00	10.9	5.23	0.00	0.00	0.00	0.00	0.00	0.00
25	92.6	92.6	91.3	88.9	85.5	80.9	70.0	34.9	2.14	2.04	10.2	3.99	0.00	0.00	0.00	0.00	0.00	0.00
30	87.3	87.3	86.1	84.0	80.8	76.3	62.4	25.2	0.00	4.08	9.54	2.75	0.00	0.00	0.00	0.00	0.00	0.00
35	79.8	80.0	78.8	76.8	73.7	68.9	48.3	12.6	0.00	5.95	7.13	1.38	0.00	0.00	0.00	0.00	0.00	0.00
40	72.4	72.6	71.5	69.6	66.6	61.4	34.2	0.05	0.00	7.83	4.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	60.4	60.9	60.1	58.5	55.7	44.2	17.1	0.03	2.21	5.48	2.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	48.4	49.1	48.7	47.4	44.7	27.0	0.00	0.00	4.41	3.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	28.2	28.5	28.7	27.7	23.9	13.5	0.00	0.42	2.21	1.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.91	7.89	8.83	8.00	3.04	0.00	0.00	0.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.95	3.94	4.42	4.00	1.52	0.00	0.00	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30.3DEG
 Operators:QC1
 Test Date:2023-06-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:63%
 Test Distance:8.300m [K=1.0000]
 Remarks: