

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2106.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	78.0V x 68.3H
	At 50% of Imax	40.3V x 31.4H
	At 90% of Imax	13.4V x 11.2H
Beam Flux	Total	997.9 lumens per klm.
	To 10% of Imax	896.9 lumens per klm.
	To 50% of Imax	428.0 lumens per klm.
	To 90% of Imax	58.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.3350A P:8.040W PF:1.000 Lamp Flux:169.85x1 lm		
NAME: 8.02.019.0071 30x40°LLS-OP-W30C-L6-DMX(GAB定制):LED	定制:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

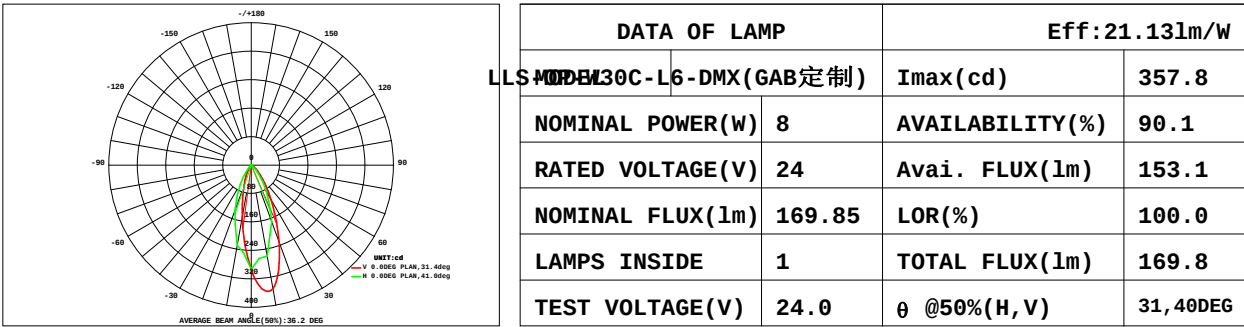

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.10	0.11	0.10	0.06	0.01	0.00	0.00	0.00	0.00	0.44	0.00
40	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.15	0.29	0.42	0.44	0.37	0.24	0.12	0.04	0.00	0.00	2.14	0.12
32	0.00	0.00	0.00	0.00	0.00	0.05	0.23	0.49	0.81	1.08	1.10	0.87	0.57	0.31	0.12	0.02	0.00	5.66	3.83
24	0.00	0.00	0.00	0.00	0.03	0.19	0.48	0.95	1.58	2.12	2.13	1.62	1.01	0.54	0.24	0.06	0.00	11.0	9.68
16	0.00	0.00	0.00	0.00	0.09	0.31	0.73	1.50	2.63	3.65	3.65	2.63	1.54	0.80	0.35	0.12	0.01	18.0	16.9
8	0.00	0.00	0.00	0.01	0.12	0.39	0.91	1.93	3.62	5.24	5.30	3.70	2.07	1.03	0.45	0.16	0.02	24.9	23.9
0	0.00	0.00	0.00	0.01	0.15	0.44	1.03	2.23	4.27	6.28	6.33	4.33	2.37	1.15	0.50	0.17	0.02	29.3	28.3
-8	0.00	0.00	0.00	0.01	0.16	0.46	1.07	2.31	4.34	6.27	6.13	4.11	2.22	1.07	0.46	0.16	0.02	28.8	27.8
-16	0.00	0.00	0.00	0.00	0.11	0.37	0.86	1.81	3.31	4.67	4.63	3.25	1.84	0.92	0.40	0.13	0.01	22.3	21.3
-24	0.00	0.00	0.00	0.00	0.05	0.24	0.58	1.19	2.08	2.88	2.92	2.17	1.31	0.68	0.30	0.09	0.01	14.5	13.3
-32	0.00	0.00	0.00	0.00	0.01	0.11	0.33	0.69	1.17	1.59	1.62	1.26	0.81	0.44	0.19	0.04	0.00	8.27	6.86
-40	0.00	0.00	0.00	0.00	0.00	0.03	0.12	0.30	0.51	0.68	0.70	0.57	0.39	0.21	0.07	0.01	0.00	3.59	1.05
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.13	0.18	0.19	0.16	0.10	0.04	0.01	0.00	0.00	0.88	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.06	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																			
Φ t	0.00	0.00	0.00	0.03	0.72	2.60	6.42	13.6	24.8	35.2	35.3	25.1	14.5	7.33	3.16	0.97	0.08	0.00	170
Φ a	0.00	0.00	0.00	0.00	0.00	0.17	4.45	12.3	23.7	34.2	34.3	24.0	13.3	5.88	0.82	0.00	0.00	0.00	153


one-half-peak spread: U:18.3,D:22.3 , L:15.8, Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3350A P:8.040W PF:1.000 Lamp Flux:169.85x1 lm		
NAME: 8.02.019.0071 30x40°LLS-0P-W30C-L6-DMX(GAB定制:LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

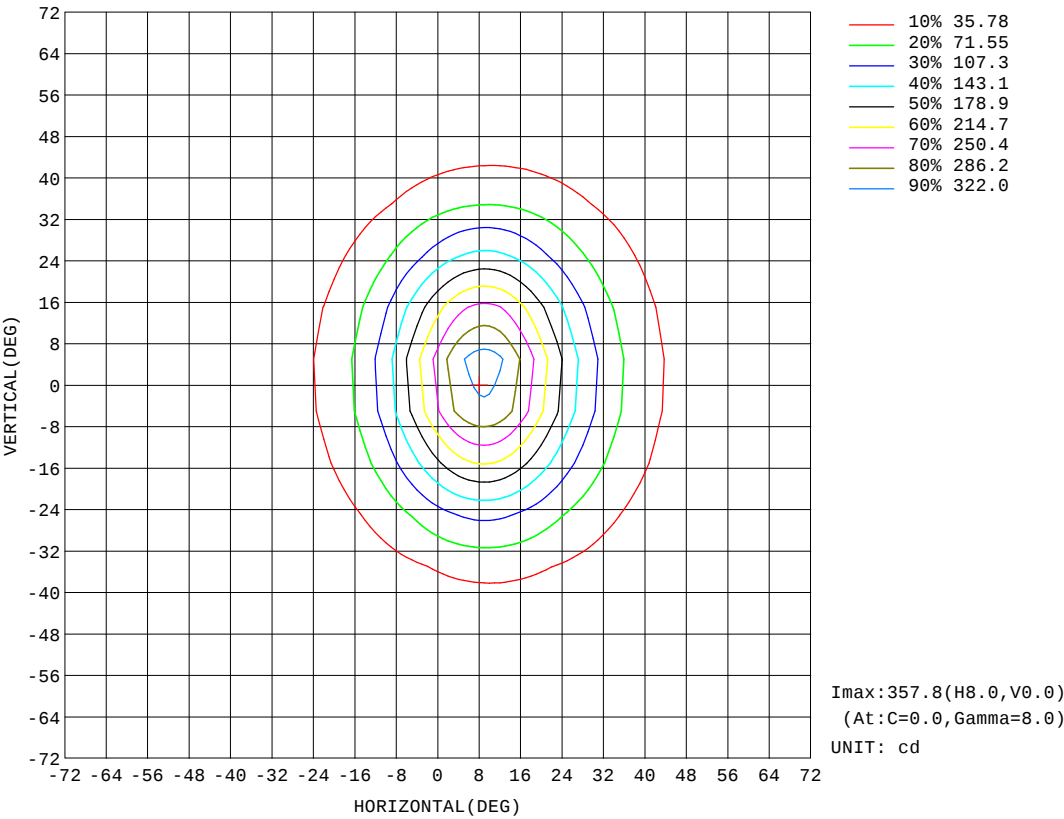


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.3350A P:8.040W PF:1.000 Lamp Flux:169.85x1 lm		
NAME: 8.02.019.0071 30x40°LLS-0P-W30C-L6-DMX(GAB定制):LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

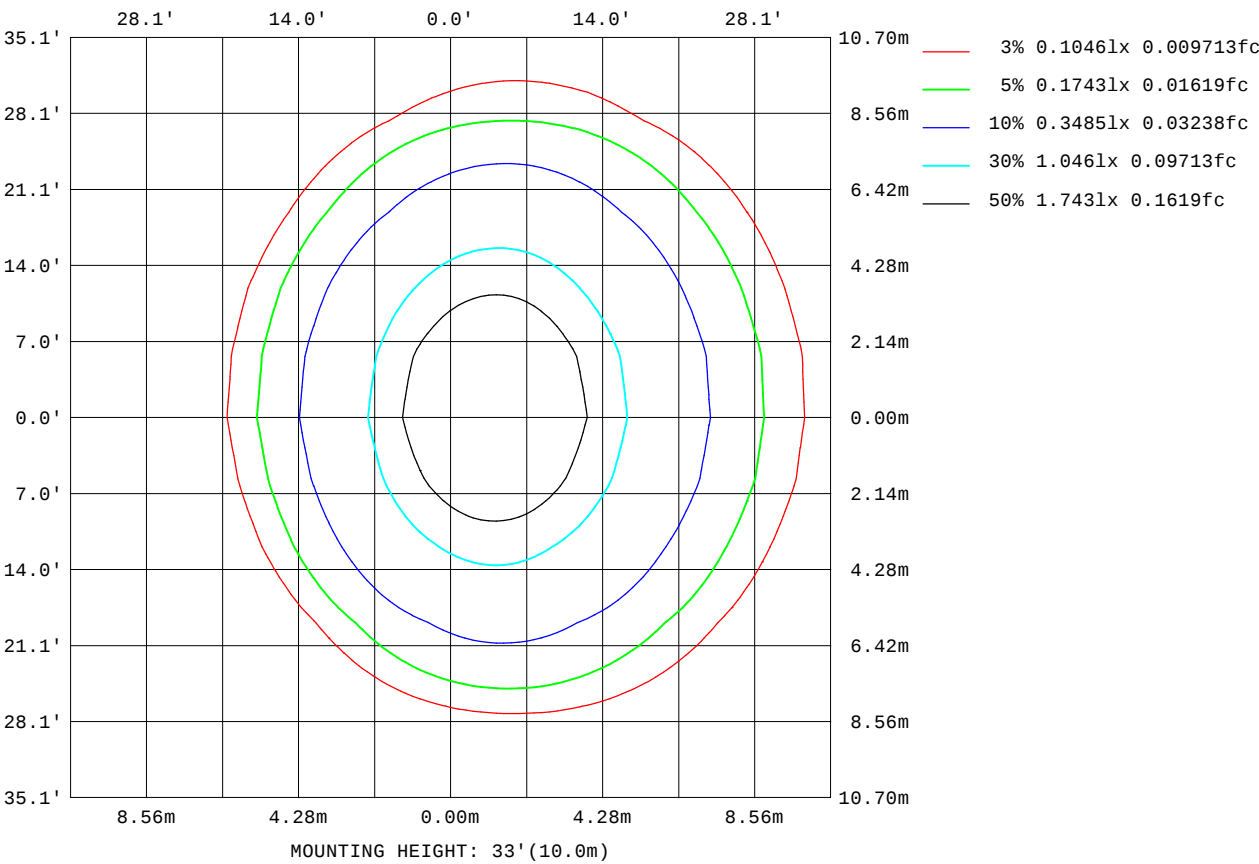


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3350A P:8.040W PF:1.000 Lamp Flux:169.85x1 lm		
NAME: 8.02.019.0071 30x40°LLS-OP-W30C-L6-DMX(GAB定制)	定制:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

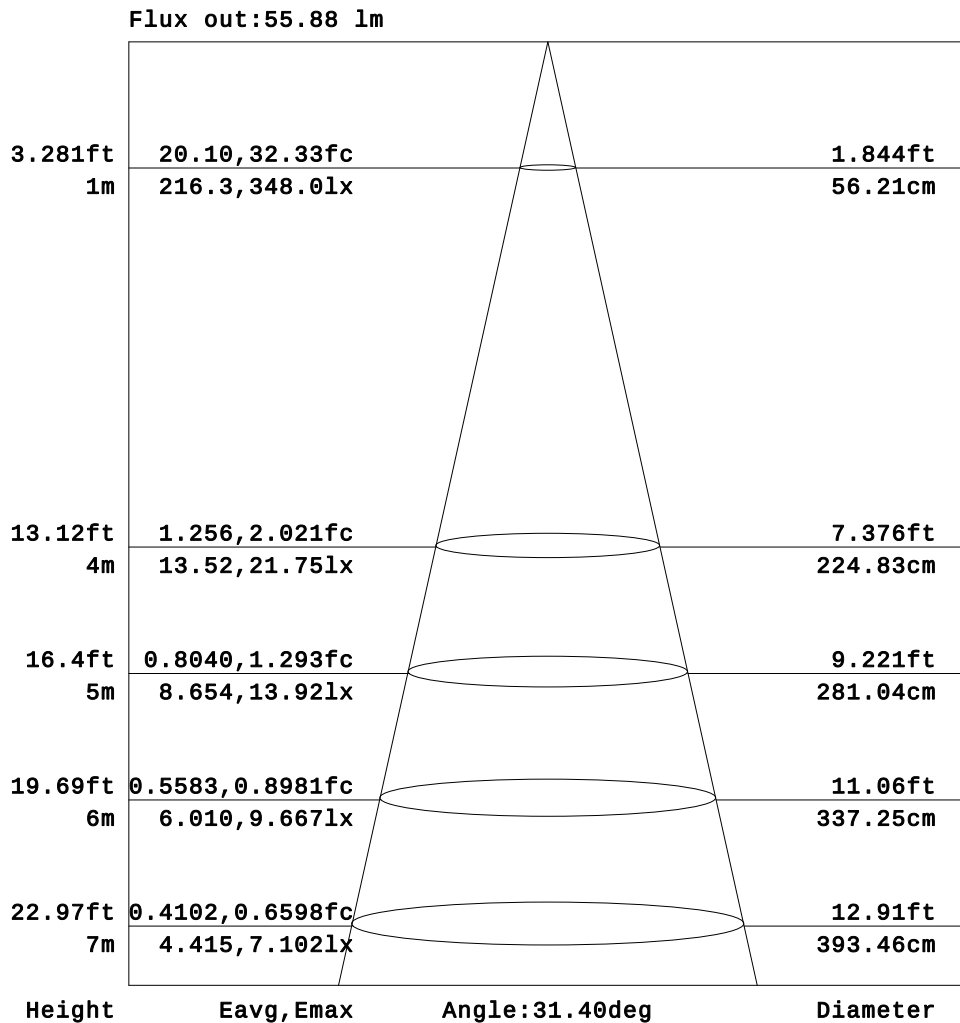


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

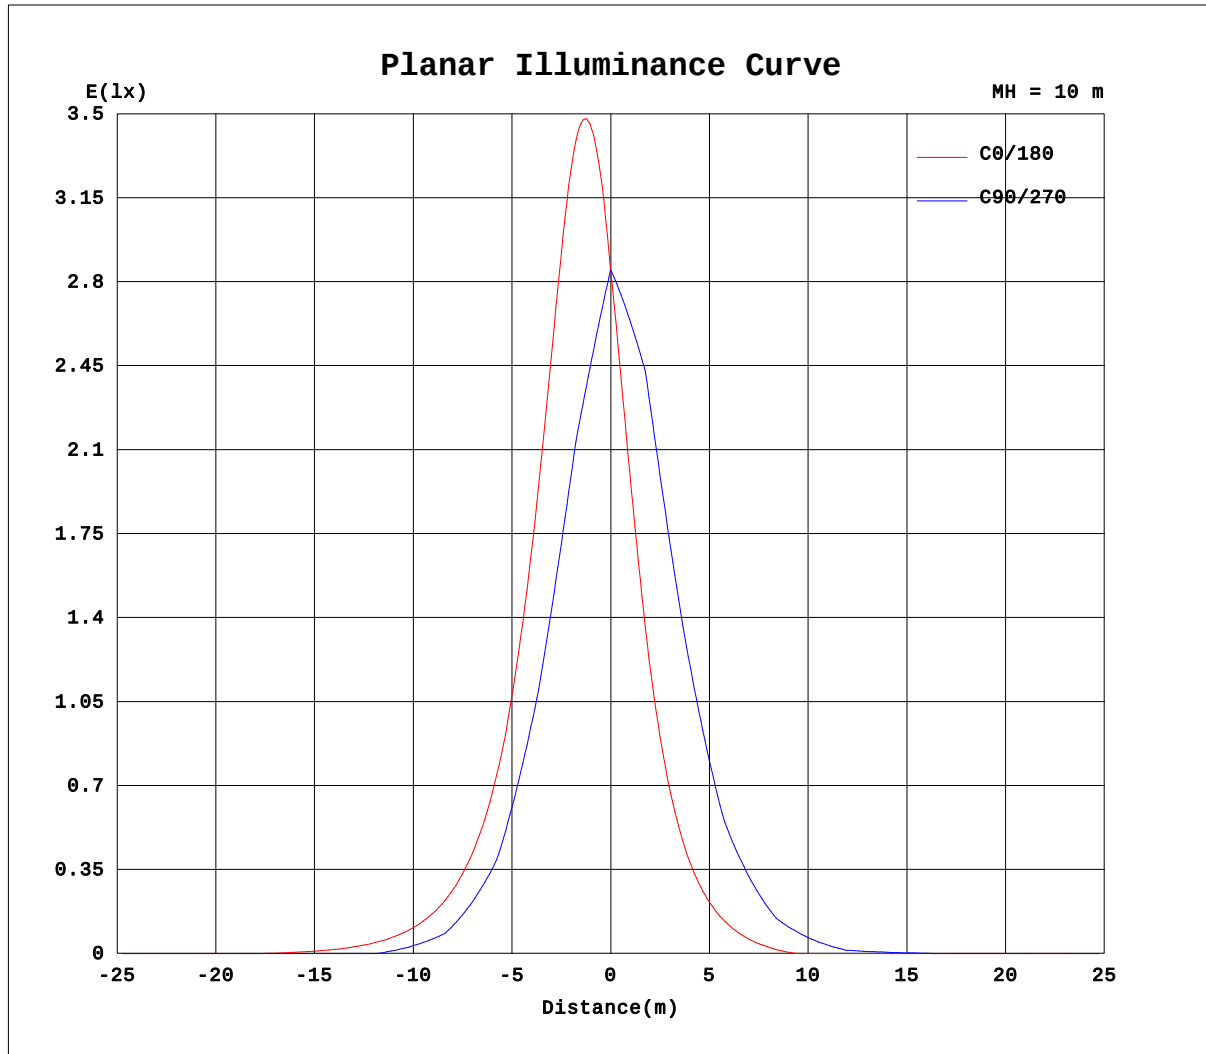

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2024-01-06

V(β) Range: -80 - 80DEG
V(β) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3350A P:8.040W PF:1.000 Lamp Flux:169.85x1 lm		
NAME: 8.02.019.0071 30x40°LLS-OP-W30C-L6-DMX(GAB定制):LED		WEIGHT:
DIM.:		SERIAL No.:2024010053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD		PROTECTION ANGLE:
SPEC.:		
SUR.:		

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	2.62	4.80	7.09	9.25	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.09	6.08	10.5	15.1	19.3	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.08	3.73	7.78	14.1	21.7	30.4	38.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.13	8.68	15.8	24.9	36.3	49.2	61.3	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	6.05	13.0	22.4	35.3	52.5	73.4	94.7	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.64	11.5	20.7	33.6	51.7	76.6	106	136		
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	5.71	13.0	23.2	37.9	59.5	90.6	131	174	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.55	9.19	18.2	30.8	49.6	78.0	120	174	229	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.35	9.03	17.9	30.6	49.8	79.0	123	183	248	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.51	12.0	22.1	36.9	59.8	95.0	148	218	292	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.90	9.77	18.9	32.1	52.2	82.9	129	193	263	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.73	10.8	20.3	34.1	54.9	86.3	133	196	260	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.49	7.57	15.6	27.0	43.7	68.5	104	153	205	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.33	7.20	14.9	25.5	41.0	63.0	93.6	131	169	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	3.36	9.56	17.8	29.2	45.3	67.1	94.0	122	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.73	7.14	14.0	23.1	35.2	50.7	68.6	86.0		
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.40	2.98	7.38	14.0	22.4	33.0	45.2	57.4		
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.15	7.89	13.5	19.9	26.9	33.3	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.15	3.44	6.13	9.67	14.3	18.7	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	3.62	5.70	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	1.58	2.66	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3350A P:8.040W PF:1.000 Lamp Flux:169.85x1 lm		
NAME: 8.02.019.0071 30x40°LLS-0P-W30C-L6-DMX(GAB定制):LED	WEIGHT:	
DIM.:	SPEC.:	SERIAL No.:2024010053
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2										UNIT: cd									
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.26	0.27	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.07	0.57	0.49	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	10.8	11.8	11.5	10.0	8.22	6.22	4.21	2.26	0.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	22.1	23.1	22.0	19.3	15.7	11.6	7.61	3.78	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	45.0	47.2	44.8	39.0	31.6	24.1	17.1	10.9	5.55	2.19	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	69.5	71.1	65.7	55.8	44.5	33.6	23.9	15.8	8.97	3.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	111	115	106	88.6	69.1	51.3	36.4	24.4	15.0	7.59	1.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	156	157	140	114	86.3	62.5	43.5	28.8	17.7	9.29	2.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	208	216	195	157	118	84.0	57.9	38.4	24.1	13.6	5.72	0.38	0.00	0.00	0.00	0.00	0.00	0.00	
-10	268	272	237	185	134	93.9	63.5	41.4	25.6	14.3	6.03	0.09	0.00	0.00	0.00	0.00	0.00	0.00	
-5	302	315	280	219	159	110	74.3	48.5	30.4	17.5	8.26	1.26	0.00	0.00	0.00	0.00	0.00	0.00	
0	348	352	301	229	163	110	73.3	47.3	29.2	16.5	7.41	0.56	0.00	0.00	0.00	0.00	0.00	0.00	
5	321	336	297	231	167	115	77.3	50.4	31.5	18.2	8.72	1.56	0.00	0.00	0.00	0.00	0.00	0.00	
10	307	312	268	207	149	103	69.0	44.9	27.7	15.7	6.88	0.37	0.00	0.00	0.00	0.00	0.00	0.00	
15	246	258	231	183	135	95.7	65.5	43.2	27.2	15.5	7.03	0.70	0.00	0.00	0.00	0.00	0.00	0.00	
20	196	199	176	140	105	75.1	51.8	34.2	21.3	11.6	4.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	144	151	138	114	87.7	64.4	45.4	30.5	19.2	10.5	3.73	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
30	98.3	100	91.9	77.0	60.6	45.3	32.3	21.7	13.2	6.40	0.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	66.8	70.0	65.9	56.7	45.6	34.8	25.0	16.7	9.87	4.16	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	37.8	39.1	36.9	32.1	26.2	20.0	14.2	8.82	4.08	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	22.1	23.5	22.7	20.1	16.5	12.5	8.43	4.93	2.49	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	7.24	8.01	7.84	6.88	5.30	3.34	1.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	3.49	3.97	3.97	3.56	2.83	1.88	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: