

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2440.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	66.9V x 64.6H
	At 50% of Imax	30.6V x 29.2H
	At 90% of Imax	7.8V x 10.4H

Beam Flux	Total	999.7 lumens per klm.
	To 10% of Imax	797.4 lumens per klm.
	To 50% of Imax	347.7 lumens per klm.
	To 90% of Imax	36.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.0609A P:7.104W PF:0.5288 Lamp Flux:808.659x1 lm		
NAME: 8.02.038.0037 15° LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090104
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

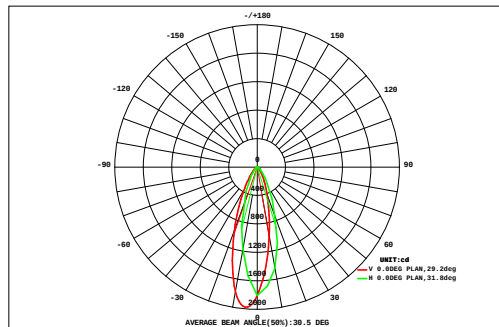

DATA OF LAMP		Eff:113.83lm/W	
MODEL	LLS-WZB-W40-L3-S	Imax(cd)	1974
NOMINAL POWER(W)	7	AVAILABILITY(%)	80.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	650.3
NOMINAL FLUX(lm)	808.659	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	808.7
TEST VOLTAGE(V)	220.6	θ @50%(H,V)	29,31DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
45	0.21	0.28	0.36	0.45	0.55	0.65	0.74	0.79	0.80	0.77	0.71	0.62	0.52	0.43	0.34	0.26	0.19	0.13	8.80	0.00
40	0.27	0.37	0.48	0.60	0.74	0.88	0.99	1.05	1.05	0.99	0.89	0.77	0.64	0.51	0.40	0.30	0.22	0.15	11.3	0.00
35	0.31	0.44	0.61	0.84	1.12	1.43	1.72	1.90	1.94	1.84	1.61	1.32	1.03	0.78	0.58	0.42	0.30	0.21	18.4	9.50
30	0.40	0.57	0.82	1.15	1.56	2.00	2.37	2.59	2.60	2.39	2.03	1.62	1.23	0.90	0.65	0.46	0.33	0.22	23.9	16.9
25	0.43	0.65	1.00	1.53	2.27	3.16	4.04	4.68	4.84	4.46	3.70	2.82	2.01	1.38	0.93	0.63	0.42	0.28	39.2	34.1
20	0.55	0.87	1.38	2.16	3.25	4.50	5.69	6.43	6.45	5.74	4.58	3.35	2.30	1.53	0.99	0.65	0.43	0.29	51.1	46.6
15	0.53	0.86	1.43	2.36	3.77	5.67	7.85	9.67	10.2	9.19	7.20	5.09	3.37	2.14	1.33	0.84	0.54	0.35	72.4	68.4
10	0.67	1.13	1.94	3.25	5.22	7.84	10.7	12.9	13.0	11.1	8.24	5.56	3.54	2.16	1.32	0.82	0.52	0.33	90.3	86.6
5	0.57	0.95	1.64	2.79	4.59	7.15	10.3	13.2	14.1	12.5	9.43	6.43	4.12	2.55	1.54	0.94	0.59	0.38	93.8	90.2
0	0.70	1.19	2.07	3.54	5.78	8.89	12.6	15.3	15.3	12.6	8.98	5.88	3.66	2.23	1.35	0.82	0.52	0.33	102	98.2
-5	0.53	0.86	1.43	2.37	3.79	5.74	8.03	10.1	10.9	9.85	7.70	5.42	3.57	2.25	1.40	0.87	0.56	0.36	75.7	71.7
-10	0.58	0.96	1.57	2.51	3.84	5.48	7.05	7.98	7.89	6.86	5.34	3.82	2.57	1.65	1.06	0.69	0.45	0.30	60.6	56.4
-15	0.43	0.66	1.02	1.56	2.33	3.33	4.37	5.21	5.52	5.14	4.26	3.21	2.27	1.53	1.02	0.68	0.45	0.30	43.3	38.2
-20	0.44	0.65	0.95	1.36	1.87	2.39	2.77	2.90	2.81	2.54	2.15	1.71	1.30	0.95	0.68	0.48	0.34	0.23	26.5	19.8
-25	0.32	0.45	0.64	0.89	1.21	1.59	1.95	2.21	2.30	2.18	1.91	1.55	1.19	0.89	0.64	0.46	0.32	0.22	20.9	13.1
-30	0.29	0.40	0.53	0.67	0.81	0.93	1.01	1.03	1.00	0.95	0.86	0.75	0.64	0.52	0.41	0.31	0.23	0.16	11.5	0.49
-35	0.22	0.30	0.39	0.50	0.62	0.74	0.85	0.93	0.95	0.91	0.83	0.72	0.60	0.48	0.37	0.28	0.20	0.14	10.0	0.00
-40	0.19	0.25	0.31	0.37	0.41	0.45	0.47	0.48	0.47	0.45	0.42	0.38	0.33	0.28	0.23	0.17	0.12	0.08	5.85	0.00
-45	0.19	0.25	0.31	0.37	0.41	0.45	0.47	0.48	0.47	0.45	0.42	0.38	0.33	0.28	0.23	0.17	0.12	0.08	5.85	0.00
Φ t	7.63	11.8	18.6	28.9	43.7	62.8	83.5	99.4	102	90.4	70.8	51.0	34.9	23.2	15.2	10.1	6.73	4.44	765	---
Φ a	0.00	1.13	10.6	22.6	38.5	58.1	79.2	95.4	98.1	86.3	66.4	45.6	28.0	15.9	4.43	0.00	0.00	0.00	---	650

one-half-peak spread: U:13.9,D:16.9 , L:14.5,R:15.0


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.0609A P:7.104W PF:0.5288 Lamp Flux:808.659x1 lm		
NAME: 8.02.038.0037 15° LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090104
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

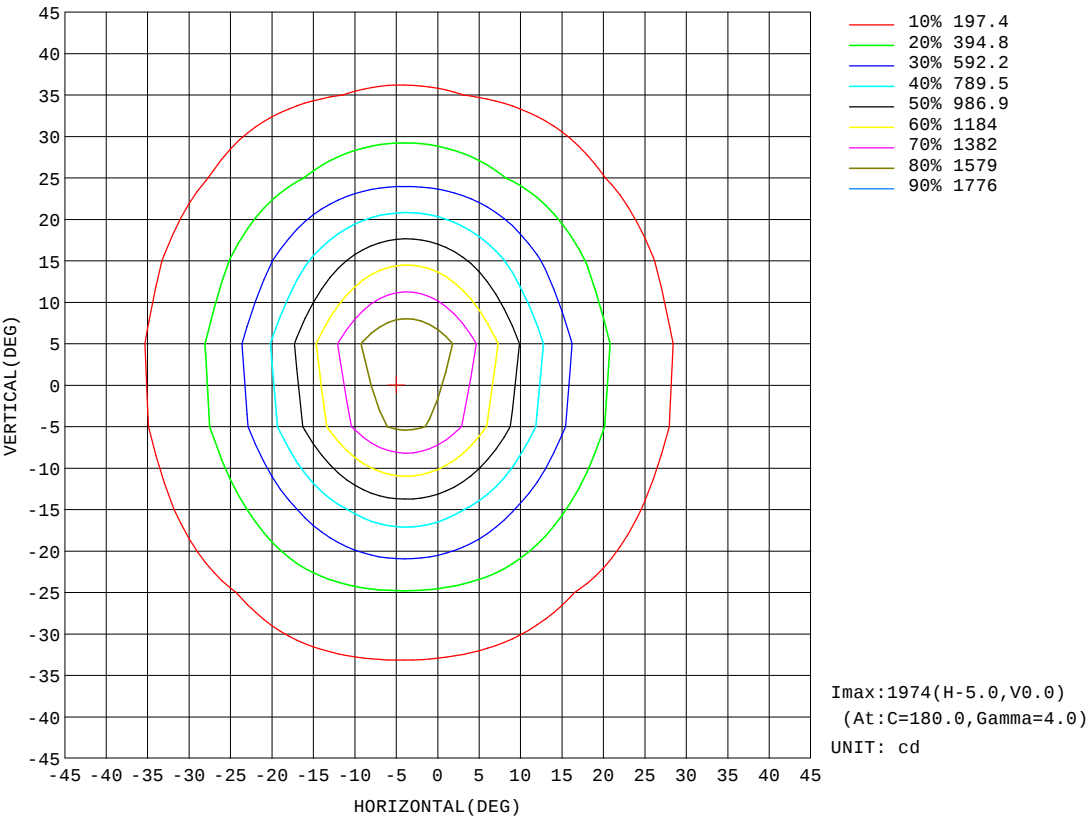


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.6V I:0.0609A P:7.104W PF:0.5288 Lamp Flux:808.659x1 lm		
NAME: 8.02.038.0037 15° LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090104
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

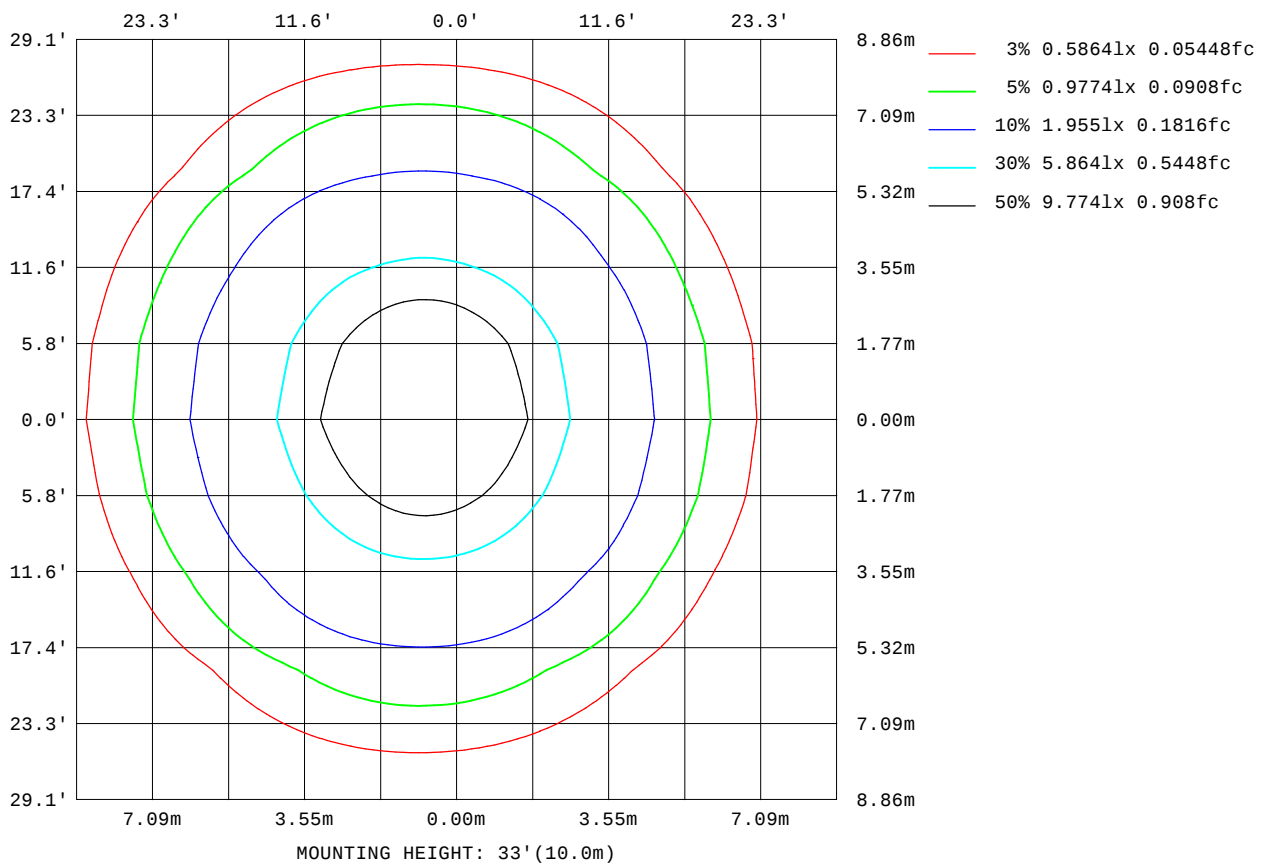


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.0609A P:7.104W PF:0.5288 Lamp Flux:808.659x1 lm		
NAME: 8.02.038.0037 15° LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090104
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

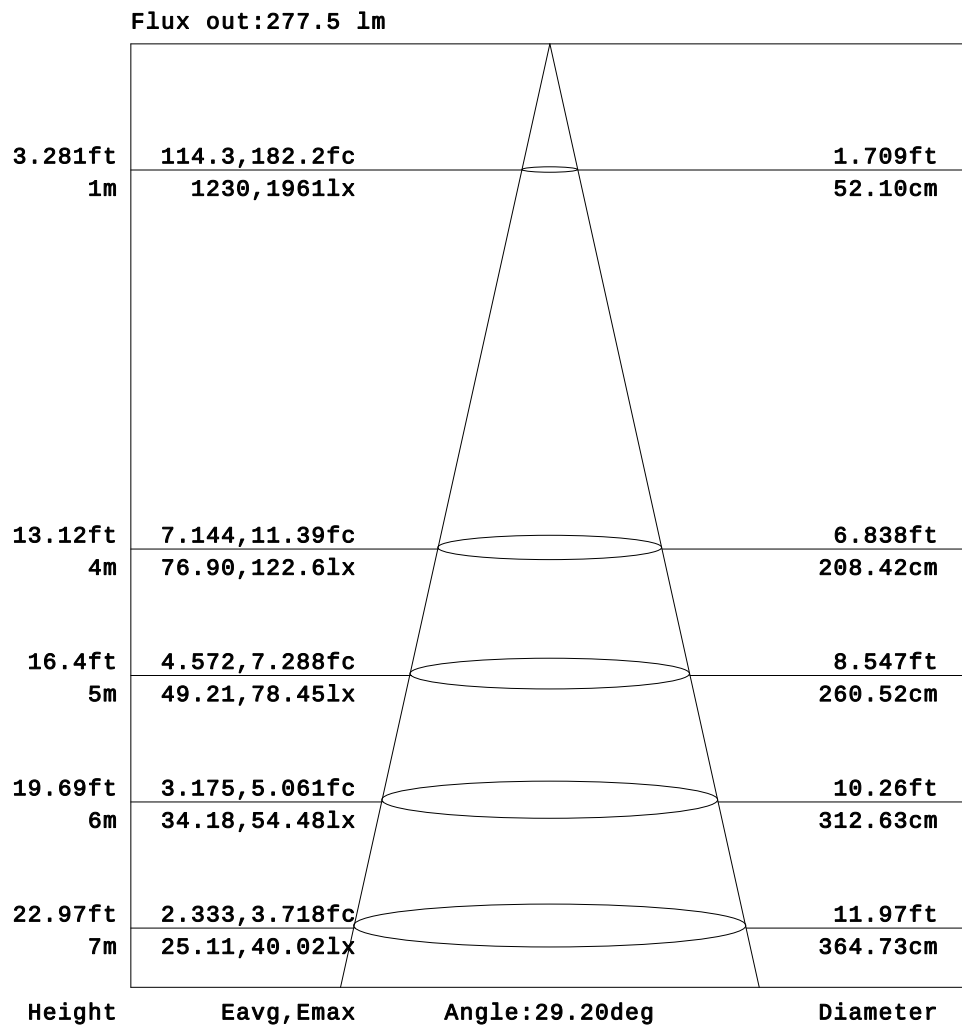


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

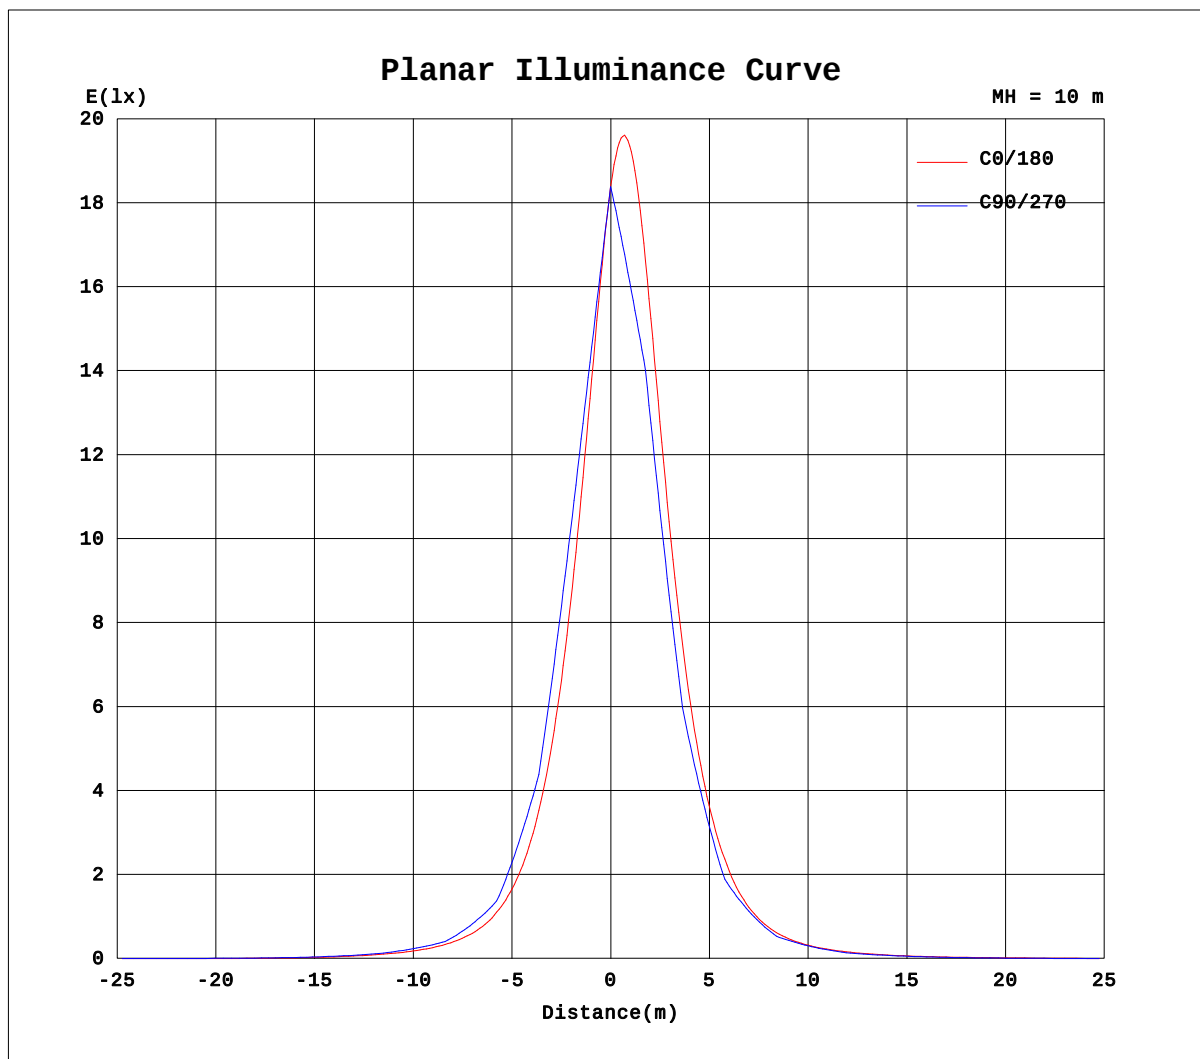

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-09-23

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.0609A P:7.104W PF:0.5288 Lamp Flux:808.659x1 lm		
NAME: 8.02.038.0037 15° LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090104
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	2.52	3.92	5.22	6.32	7.18	7.76	7.98	8.04	7.99	7.37
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	2.70	5.61	8.38	10.9	13.0	14.6	15.7	16.0	16.1	15.9	14.5
-55	0.00	0.00	0.00	0.00	0.00	0.00	1.64	4.04	7.51	11.4	15.4	19.2	22.7	25.7	28.0	29.4	30.4	30.5	29.1
-50	0.00	0.00	0.00	0.00	0.00	0.00	4.24	9.06	13.9	18.9	23.9	28.9	33.7	37.9	41.0	43.4	44.9	44.7	43.2
-45	0.00	0.00	0.00	0.00	0.00	1.74	6.82	12.5	18.5	24.8	31.5	38.6	45.9	53.0	59.3	64.6	68.2	69.2	67.5
-40	0.00	0.00	0.00	0.00	0.00	5.21	11.7	18.4	25.6	33.4	41.9	51.2	61.1	70.8	79.8	87.6	92.4	93.4	90.7
-35	0.00	0.00	0.00	0.00	0.37	6.06	13.5	21.1	29.6	39.2	50.6	64.2	80.4	98.8	118	137	150	156	152
-30	0.00	0.00	0.00	0.00	1.88	10.2	18.3	27.1	37.3	49.3	64.3	83.3	107	134	165	193	212	218	210
-25	0.00	0.00	0.00	0.00	2.56	10.9	19.6	29.2	40.7	55.2	74.9	102	140	190	251	313	362	385	373
-20	0.00	0.00	0.00	0.00	6.08	14.9	24.5	35.6	49.4	68.1	95.1	134	191	267	363	456	527	552	524
-15	0.00	0.00	0.00	0.00	5.30	14.4	24.3	35.8	50.5	71.0	102	152	229	340	489	659	814	896	864
-10	0.00	0.00	0.00	0.01	8.04	17.7	28.4	41.3	58.6	84.4	126	196	305	466	681	930	1149	1246	1165
-5	0.00	0.00	0.00	0.00	6.84	16.5	27.2	40.0	57.1	82.7	124	195	314	493	750	1073	1407	1602	1530
0	0.00	0.00	0.00	0.51	9.37	19.5	30.6	44.7	64.0	94.5	146	234	384	612	939	1356	1776	1974	1806
5	0.00	0.00	0.00	0.00	7.21	17.0	27.8	40.8	58.2	84.8	128	204	329	523	802	1158	1531	1752	1676
10	0.00	0.00	0.00	0.33	8.82	18.7	29.6	42.9	61.1	89.2	135	214	341	532	796	1114	1411	1551	1446
15	0.00	0.00	0.00	0.00	6.36	15.7	25.9	37.9	53.4	76.1	112	170	262	400	589	813	1026	1146	1106
20	0.00	0.00	0.00	0.00	7.51	16.7	26.7	38.3	53.3	74.7	107	156	230	337	468	603	710	752	713
25	0.00	0.00	0.00	0.00	4.40	12.9	22.0	32.2	44.7	61.1	84.6	119	168	237	324	414	490	526	510
30	0.00	0.00	0.00	0.00	4.62	12.7	21.2	30.7	41.8	55.6	73.9	98.3	130	171	216	260	291	302	290
35	0.00	0.00	0.00	0.00	1.64	8.77	16.5	24.7	34.0	44.8	58.3	75.2	96.6	123	152	181	202	212	207
40	0.00	0.00	0.00	0.00	1.15	7.90	14.9	22.3	30.3	38.9	48.8	59.9	72.6	86.2	99.9	112	120	122	119
45	0.00	0.00	0.00	0.00	0.12	3.74	9.89	16.2	22.8	29.8	37.3	45.5	54.4	63.6	72.6	80.8	86.6	88.7	87.1
50	0.00	0.00	0.00	0.00	0.00	2.02	7.36	12.7	18.1	23.5	29.0	34.5	39.8	44.7	48.7	52.4	54.7	55.1	53.9
55	0.00	0.00	0.00	0.00	0.00	0.47	3.14	7.15	11.5	15.9	20.2	24.4	28.4	32.0	34.9	37.2	39.1	39.6	38.6
60	0.00	0.00	0.00	0.00	0.00	0.00	0.09	3.34	6.73	9.96	13.1	15.9	18.4	20.5	22.1	23.0	23.8	23.8	22.8
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.32	3.03	4.66	6.24	7.78	9.59	11.2	12.4	13.1	13.6	13.7	12.8
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	1.44	2.35	3.09	3.47	3.48	3.40	2.49
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.63	1.08	1.48	1.73	1.74	1.72	1.32
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.0609A P:7.104W PF:0.5288 Lamp Flux:808.659x1 lm		
NAME: 8.02.038.0037 15° LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090104
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	6.77	5.93	4.96	3.73	2.55	1.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	13.3	11.5	9.44	6.98	4.62	1.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	27.5	25.1	22.2	18.7	14.9	10.8	7.19	4.35	1.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	41.0	37.6	33.7	28.9	23.7	18.6	13.2	7.61	2.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	64.0	58.5	51.9	44.7	37.3	30.0	23.0	16.2	9.63	4.29	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	85.1	76.9	67.4	57.6	47.8	38.6	30.0	22.0	14.2	7.28	1.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	141	124	105	86.3	69.5	54.9	42.6	32.0	22.5	13.8	6.30	1.29	0.00	0.00	0.00	0.00	0.00	0.00
-30	190	163	135	108	85.0	65.9	50.6	38.0	27.1	17.2	8.69	1.05	0.00	0.00	0.00	0.00	0.00	0.00
-25	332	274	214	162	120	88.6	65.7	48.5	35.0	23.5	13.4	4.90	0.00	0.00	0.00	0.00	0.00	0.00
-20	452	361	272	198	140	101	73.0	53.0	38.0	25.4	14.6	5.49	0.00	0.00	0.00	0.00	0.00	0.00
-15	736	567	408	283	190	130	90.6	64.1	45.4	31.2	19.0	9.01	0.66	0.00	0.00	0.00	0.00	0.00
-10	954	706	489	324	212	141	95.8	66.7	46.8	31.8	19.2	8.84	0.21	0.00	0.00	0.00	0.00	0.00
-5	1245	904	613	400	256	165	109	74.9	52.1	35.8	22.4	11.3	1.71	0.00	0.00	0.00	0.00	0.00
0	1400	975	639	407	256	162	107	72.5	50.2	34.1	20.8	9.88	0.58	0.00	0.00	0.00	0.00	0.00
5	1357	978	656	424	268	172	113	76.6	53.1	36.6	22.9	11.7	1.92	0.00	0.00	0.00	0.00	0.00
10	1163	840	566	368	234	152	101	69.8	48.6	33.2	20.1	9.43	0.41	0.00	0.00	0.00	0.00	0.00
15	929	700	491	331	217	144	98.2	68.5	48.3	33.3	20.5	9.96	0.97	0.00	0.00	0.00	0.00	0.00
20	606	472	344	241	166	115	81.0	58.0	41.4	27.9	16.3	6.67	0.00	0.00	0.00	0.00	0.00	0.00
25	449	362	275	200	144	103	74.4	54.2	39.1	26.6	15.7	6.44	0.09	0.00	0.00	0.00	0.00	0.00
30	259	217	173	134	102	77.6	58.6	43.7	31.6	20.6	11.1	2.75	0.00	0.00	0.00	0.00	0.00	0.00
35	189	163	135	108	85.1	66.1	50.8	38.3	27.7	17.9	9.24	2.20	0.00	0.00	0.00	0.00	0.00	0.00
40	111	98.9	85.6	72.3	59.6	47.9	37.7	28.5	19.7	11.4	4.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	82.3	75.0	66.1	56.9	47.6	38.7	30.5	22.7	15.2	8.16	2.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	51.5	47.7	43.0	37.8	31.9	26.0	20.2	13.9	7.78	2.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	37.0	34.3	30.9	26.9	22.5	18.0	13.0	7.99	4.47	1.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	21.6	19.6	17.3	14.3	11.2	8.10	3.93	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	11.9	10.4	8.92	7.46	5.92	4.41	2.38	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	1.75	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.99	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: