

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1128.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	95.9V x 93.8H
	At 50% of Imax	53.9V x 55.3H
	At 90% of Imax	19.3V x 22.7H

Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	934.0 lumens per klm.
	To 50% of Imax	551.1 lumens per klm.
	To 90% of Imax	102.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.8V I:0.0656A P:7.699W PF:1.000 Freq:50.00Hz Lamp Flux:612.174x1 lm		
NAME: 8.02.038.0042 LLS-WZB-W40-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120023
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

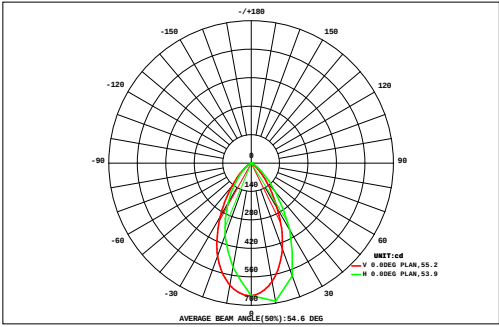

DATA OF LAMP		Eff:79.51lm/W	
MODEL LLS-WZB-W40-L3-DIM		Imax(cd)	690.6
NOMINAL POWER(W)	7	AVAILABILITY(%)	93.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	574.7
NOMINAL FLUX(lm)	612.174	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	612.2
TEST VOLTAGE(V)	220	θ @50%(H,V)	55,54DEG


AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.11	0.13	0.11	0.06	0.01	0.00	0.00	0.00	0.00	0.48	0.00
56	0.00	0.00	0.00	0.00	0.05	0.17	0.31	0.46	0.59	0.64	0.59	0.46	0.30	0.16	0.05	0.00	0.00	3.78	0.00
48	0.00	0.00	0.00	0.05	0.22	0.49	0.84	1.19	1.46	1.55	1.44	1.15	0.80	0.47	0.20	0.05	0.00	9.93	4.78
40	0.00	0.00	0.03	0.22	0.57	1.10	1.75	2.40	2.86	2.97	2.72	2.16	1.49	0.88	0.42	0.14	0.01	19.7	16.7
32	0.00	0.00	0.11	0.42	1.01	1.90	3.01	4.10	4.84	4.99	4.54	3.60	2.46	1.44	0.70	0.26	0.04	33.4	31.3
24	0.00	0.02	0.18	0.63	1.48	2.83	4.53	6.14	7.15	7.32	6.75	5.47	3.75	2.16	1.05	0.40	0.09	50.0	48.3
	0.00	0.02	0.23	0.77	1.85	3.66	5.96	8.04	9.27	9.53	8.82	7.28	5.07	2.93	1.41	0.54	0.14	65.5	64.0
	0.00	0.03	0.27	0.90	2.20	4.39	7.24	9.75	11.3	11.6	10.7	8.72	6.04	3.45	1.63	0.62	0.16	79.0	77.6
	0.00	0.05	0.34	1.07	2.55	5.05	8.25	11.1	12.9	13.1	11.8	9.30	6.21	3.41	1.54	0.56	0.14	87.3	85.9
	0.00	0.04	0.29	0.96	2.33	4.70	7.89	11.0	13.0	13.3	11.9	9.24	6.04	3.26	1.49	0.54	0.13	86.0	84.6
	0.00	0.02	0.20	0.70	1.75	3.56	6.18	8.98	10.9	11.4	10.2	7.89	5.15	2.84	1.31	0.49	0.12	71.7	70.2
-24	0.00	0.01	0.12	0.49	1.25	2.52	4.35	6.35	7.84	8.25	7.43	5.67	3.70	2.07	0.96	0.35	0.07	51.4	49.7
-32	0.00	0.00	0.07	0.31	0.82	1.64	2.75	3.92	4.78	4.99	4.43	3.33	2.16	1.21	0.56	0.19	0.03	31.2	28.9
-40	0.00	0.00	0.02	0.15	0.43	0.88	1.42	1.96	2.33	2.37	2.08	1.57	1.02	0.56	0.23	0.05	0.00	15.1	11.6
-48	0.00	0.00	0.00	0.01	0.10	0.27	0.50	0.74	0.92	0.97	0.88	0.67	0.43	0.22	0.08	0.02	0.00	5.80	1.15
-56	0.00	0.00	0.00	0.00	0.01	0.02	0.09	0.18	0.26	0.30	0.28	0.21	0.12	0.06	0.02	0.01	0.00	1.55	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.04	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.22	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.20	1.87	6.68	16.6	33.2	55.1	76.3	90.5	93.4	84.7	66.8	44.8	25.1	11.7	4.21	0.94	0.04	612
Φ a	0.00	0.00	0.00	2.31	13.7	30.5	53.0	74.2	88.4	91.4	82.8	64.9	42.2	22.7	8.22	0.54	0.00	0.00	575

one-half-peak spread: U:21.8,D:32.5 , L:27.5,R:28.1 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-12-04
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.0656A P:7.699W PF:1.000 Freq:50.00Hz Lamp Flux:612.174x1 lm		
NAME: 8.02.038.0042 LLS-WZB-W40-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120023
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

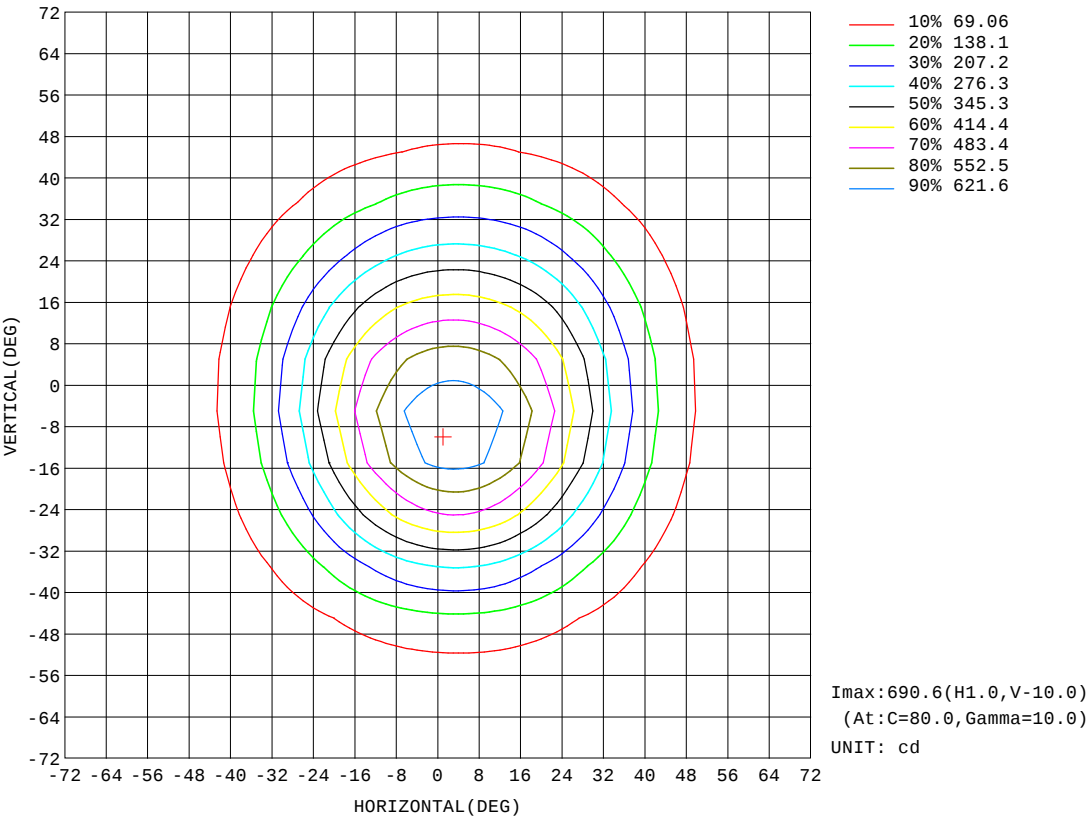


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.8V I:0.0656A P:7.699W PF:1.000 Freq:50.00Hz Lamp Flux:612.174x1 lm		
NAME: 8.02.038.0042 LLS-WZB-W40-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120023
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

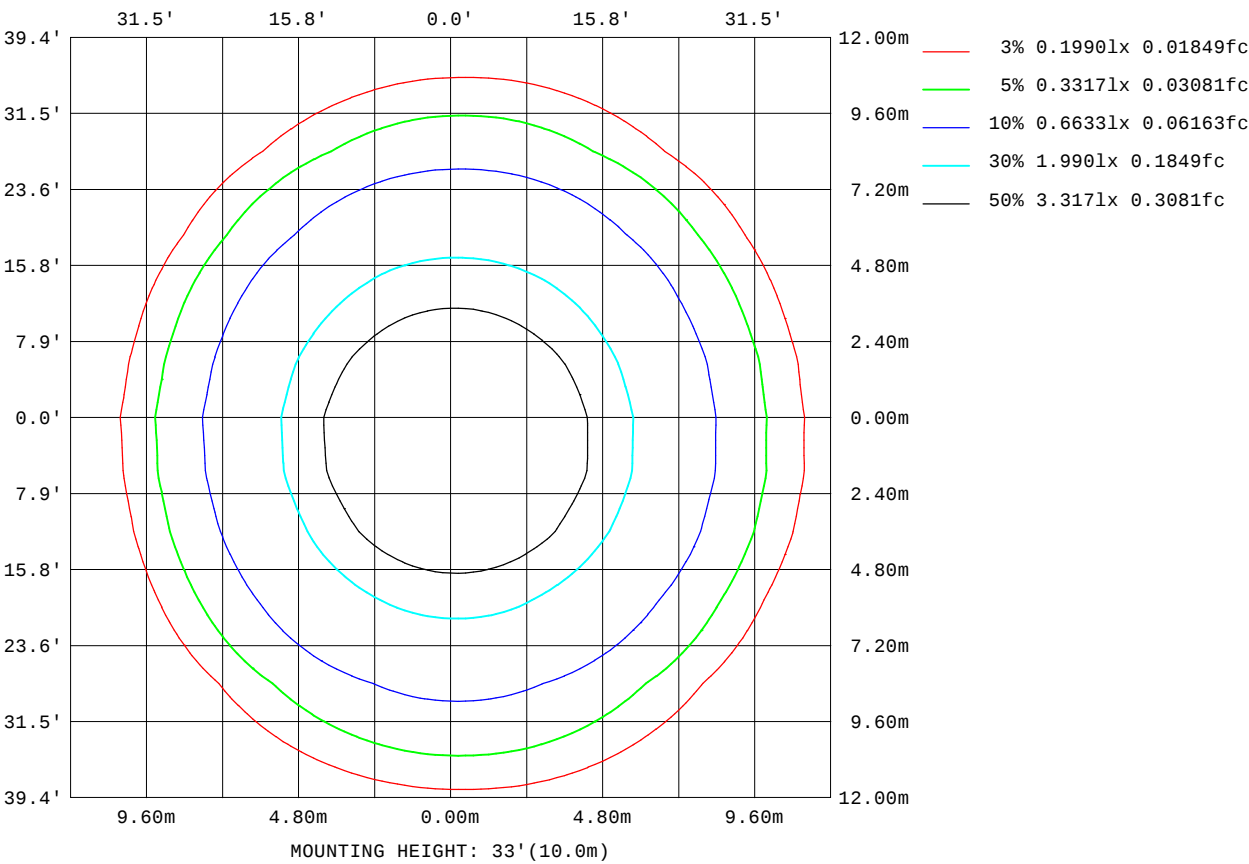

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

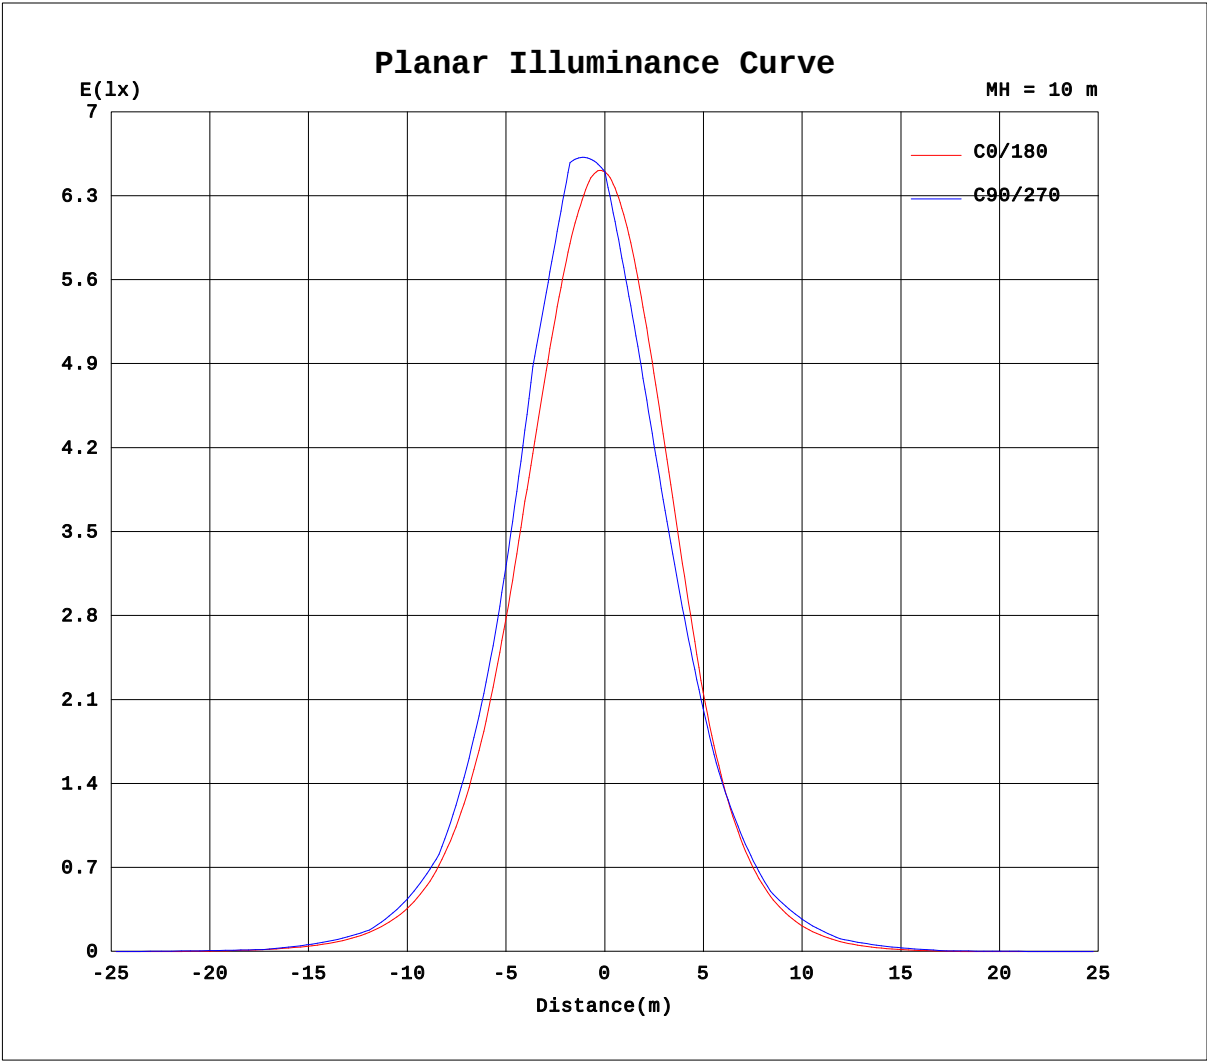


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.0656A P:7.699W PF:1.000 Freq:50.00Hz Lamp Flux:612.174x1 lm		
NAME: 8.02.038.0042 LLS-WZB-W40-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120023
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

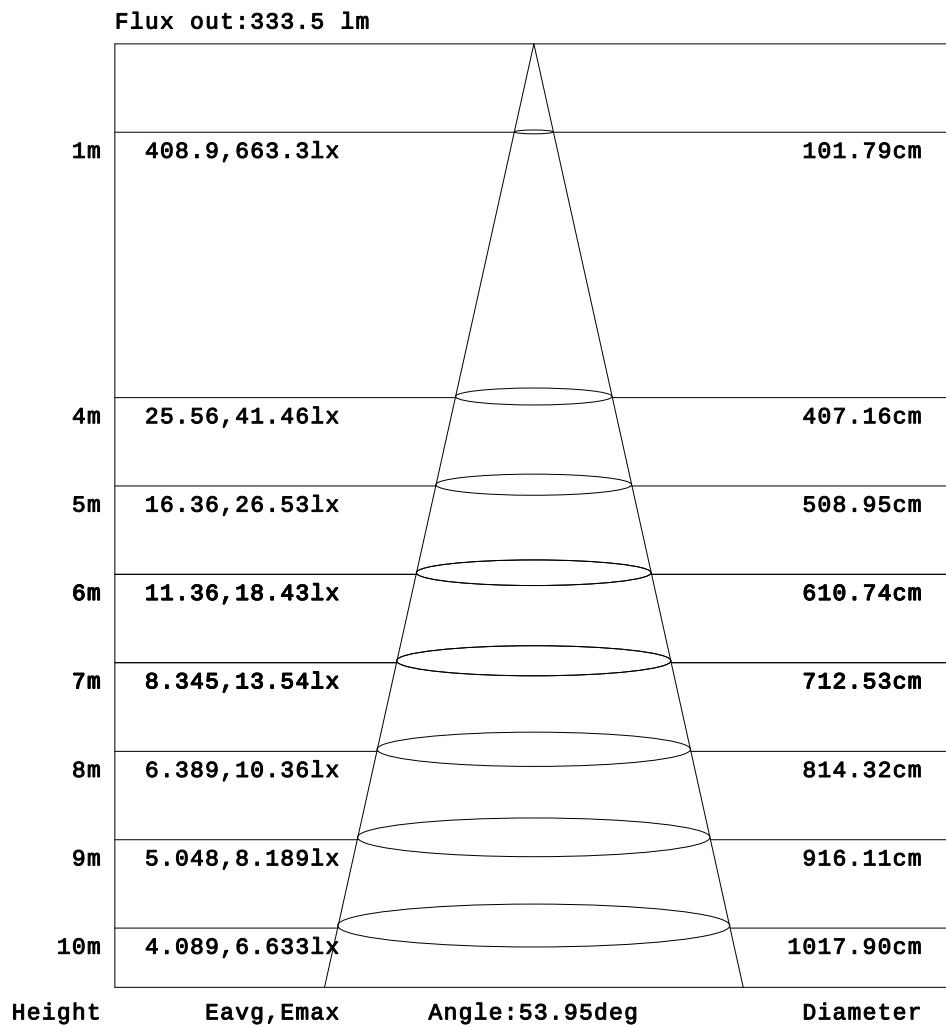

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.0656A P:7.699W PF:1.000 Freq:50.00Hz Lamp Flux:612.174x1 lm		
NAME: 8.02.038.0042 LLS-WZB-W40-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120023
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	2.05	3.67	5.13	6.40	7.18
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.30	5.38	8.57	11.3	13.4	14.6
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.86	4.96	8.81	13.8	20.2	26.8	32.8	37.9	41.0
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	6.01	12.9	21.1	30.3	40.3	50.0	58.7	65.1	68.4
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.46	5.18	12.6	23.1	36.3	51.9	69.1	86.6	103	116	124
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	5.49	14.3	26.9	43.4	63.6	86.9	112	137	158	174	181
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	7.18	17.9	33.8	55.3	82.9	116	155	194	231	260	277
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.01	5.74	16.3	32.8	56.3	87.8	128	176	230	283	330	363	378
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.04	4.78	15.4	32.5	58.1	93.5	140	198	266	337	401	451	479
-20	0.00	0.00	0.00	0.00	0.00	0.00	1.74	11.1	26.2	50.6	85.8	134	196	272	361	446	517	567	590
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.53	8.47	22.4	45.3	79.3	127	192	273	365	460	540	601	635
-10	0.00	0.00	0.00	0.00	0.00	0.00	4.01	15.3	34.2	64.2	108	169	250	345	447	542	617	669	690
-5	0.00	0.00	0.00	0.00	0.00	0.00	1.29	10.8	26.7	52.7	91.1	145	219	308	409	502	578	635	667
0	0.00	0.00	0.00	0.00	0.00	0.00	5.03	17.1	37.1	68.4	114	176	257	354	448	528	591	633	651
5	0.00	0.00	0.00	0.00	0.00	0.00	1.17	10.5	25.9	50.8	87.0	138	206	287	375	454	516	559	583
10	0.00	0.00	0.00	0.00	0.00	0.00	3.62	14.3	31.9	58.8	97.2	149	217	293	368	434	479	508	521
15	0.00	0.00	0.00	0.00	0.00	0.00	0.37	7.64	20.5	40.7	69.6	109	161	223	288	349	398	430	447
20	0.00	0.00	0.00	0.00	0.00	0.00	1.16	9.76	23.0	43.3	71.2	108	153	205	258	306	346	370	379
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.37	12.6	26.7	46.6	73.0	106	145	187	228	264	290	303
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.47	12.0	24.5	41.7	63.4	90.1	119	150	180	206	224	232
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.45	4.42	12.7	24.3	39.4	58.1	79.3	102	125	145	161	171
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.67	9.35	18.4	29.5	42.6	57.1	72.1	86.5	99.2	109	113
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	3.17	7.39	14.7	23.4	33.2	43.9	54.2	63.8	71.6	76.4
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.80	6.45	11.9	17.8	24.0	29.8	35.2	39.3	41.2
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	2.24	4.80	7.69	10.8	14.4	18.3	21.5	23.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	2.14	4.15	5.68	6.43
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	1.67	2.58	3.15
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.0656A P:7.699W PF:1.000 Freq:50.00Hz Lamp Flux:612.174x1 lm		
NAME: 8.02.038.0042 LLS-WZB-W40-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120023
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	7.46	7.26	6.33	5.01	3.51	1.96	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	15.0	13.9	11.7	8.83	5.92	2.76	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	41.7	40.5	36.6	31.1	24.8	18.4	12.2	7.53	4.07	1.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	68.0	64.4	57.4	48.2	38.7	28.9	19.9	12.1	5.80	0.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	125	120	109	94.0	76.9	60.0	43.7	29.7	18.0	9.03	3.16	0.13	0.00	0.00	0.00	0.00	0.00	0.00
-40	179	168	150	126	101	77.6	55.7	37.0	22.3	11.4	3.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	280	268	241	206	167	129	94.9	65.5	41.9	24.1	11.5	3.03	0.00	0.00	0.00	0.00	0.00	0.00
-30	374	350	306	255	202	152	109	73.5	45.7	25.6	11.9	2.62	0.00	0.00	0.00	0.00	0.00	0.00
-25	483	463	419	360	291	224	163	112	72.2	43.0	22.7	9.20	1.22	0.00	0.00	0.00	0.00	0.00
-20	582	548	489	411	325	245	174	115	72.7	42.2	21.5	7.94	0.22	0.00	0.00	0.00	0.00	0.00
-15	639	614	563	490	402	311	224	154	99.2	59.7	32.6	14.8	3.55	0.00	0.00	0.00	0.00	0.00
-10	682	645	583	501	405	303	215	144	90.7	52.9	27.5	11.2	1.25	0.00	0.00	0.00	0.00	0.00
-5	669	644	595	525	439	344	251	173	111	67.3	37.0	17.2	4.78	0.00	0.00	0.00	0.00	0.00
0	642	609	556	486	398	306	220	147	92.9	54.3	28.5	11.7	1.42	0.00	0.00	0.00	0.00	0.00
5	585	564	526	472	400	317	235	163	106	64.6	35.8	16.6	4.50	0.00	0.00	0.00	0.00	0.00
10	516	493	457	405	336	259	188	129	83.1	48.9	25.7	10.3	0.92	0.00	0.00	0.00	0.00	0.00
15	449	436	409	369	313	249	185	131	86.8	53.0	29.3	13.1	2.76	0.00	0.00	0.00	0.00	0.00
20	376	360	332	291	239	186	136	94.7	61.1	36.0	18.4	6.39	0.00	0.00	0.00	0.00	0.00	0.00
25	305	297	277	247	208	167	125	89.5	59.8	36.6	19.6	7.70	0.71	0.00	0.00	0.00	0.00	0.00
30	231	220	201	174	144	113	84.3	59.1	38.2	22.1	10.2	1.91	0.00	0.00	0.00	0.00	0.00	0.00
35	173	168	156	138	116	93.3	71.3	51.2	33.8	20.0	9.49	2.42	0.00	0.00	0.00	0.00	0.00	0.00
40	113	108	98.0	84.9	70.5	55.6	41.6	28.7	17.6	8.77	2.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	77.6	75.6	70.0	61.7	51.8	41.4	31.2	21.7	13.2	6.24	2.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	41.6	39.8	35.8	30.8	25.1	18.9	13.0	7.60	2.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	24.2	23.7	21.5	18.3	14.5	10.7	7.68	4.84	2.31	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	6.90	6.19	4.75	2.88	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.41	3.31	2.70	1.82	0.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: