

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2319.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	67.6V x 65.8H
	At 50% of Imax	31.4V x 30.1H
	At 90% of Imax	9.5V x 11.0H
Beam Flux	Total	999.6 lumens per klm.
	To 10% of Imax	789.6 lumens per klm.
	To 50% of Imax	356.5 lumens per klm.
	To 90% of Imax	43.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.5V I:0.0597A P:7.475W PF:0.5183 Lamp Flux:731.23x1 lm		
NAME: 8.02.038.0026 15°LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

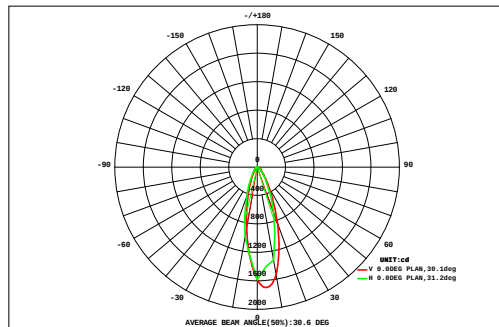

DATA OF LAMP		Eff:97.82lm/W	
MODEL	LLS-WZB-W40-L3-S	Imax(cd)	1696
NOMINAL POWER(W)	7	AVAILABILITY(%)	79.4
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	580.6
NOMINAL FLUX(lm)	731.23	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	731.2
TEST VOLTAGE(V)	241.5	θ @50%(H,V)	30,31DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
45	0.11	0.17	0.23	0.30	0.37	0.46	0.55	0.64	0.71	0.77	0.78	0.76	0.70	0.61	0.52	0.42	0.34	0.26	8.68	0.00
40	0.16	0.22	0.30	0.38	0.48	0.60	0.72	0.85	0.95	1.01	1.02	0.97	0.87	0.74	0.61	0.48	0.37	0.28	11.0	0.00
35	0.16	0.24	0.34	0.46	0.62	0.83	1.09	1.37	1.62	1.79	1.84	1.74	1.52	1.24	0.95	0.71	0.52	0.37	17.4	10.5
30	0.21	0.31	0.43	0.60	0.83	1.14	1.51	1.90	2.24	2.45	2.45	2.25	1.90	1.49	1.11	0.80	0.57	0.39	22.6	16.9
25	0.21	0.32	0.47	0.69	1.02	1.51	2.21	3.05	3.89	4.44	4.53	4.12	3.35	2.49	1.74	1.17	0.78	0.51	36.5	32.2
20	0.27	0.40	0.61	0.92	1.41	2.13	3.17	4.38	5.51	6.13	6.04	5.27	4.09	2.90	1.94	1.27	0.80	0.52	47.7	44.0
15	0.24	0.38	0.59	0.93	1.47	2.35	3.72	5.59	7.63	9.11	9.30	8.12	6.19	4.26	2.75	1.71	1.05	0.65	66.0	62.8
10	0.30	0.47	0.75	1.21	1.99	3.25	5.20	7.79	10.4	12.0	11.7	9.64	6.94	4.55	2.82	1.69	1.02	0.62	82.4	79.3
5	0.26	0.41	0.64	1.03	1.68	2.77	4.50	6.94	9.72	11.9	12.2	10.5	7.81	5.22	3.27	1.98	1.19	0.72	82.6	79.7
0	0.31	0.49	0.78	1.27	2.10	3.50	5.66	8.53	11.5	13.3	12.7	10.3	7.28	4.69	2.87	1.72	1.03	0.62	88.7	85.7
-5	0.24	0.38	0.58	0.91	1.43	2.25	3.51	5.27	7.26	8.85	9.23	8.19	6.31	4.35	2.82	1.75	1.09	0.67	65.1	61.9
-10	0.27	0.41	0.64	0.98	1.51	2.29	3.41	4.80	6.10	6.85	6.69	5.75	4.38	3.05	2.03	1.30	0.84	0.54	51.8	48.2
-15	0.20	0.31	0.46	0.68	0.99	1.43	2.05	2.87	3.72	4.39	4.61	4.27	3.52	2.62	1.83	1.24	0.82	0.54	36.6	32.4
-20	0.21	0.32	0.46	0.64	0.89	1.20	1.56	1.94	2.20	2.30	2.26	2.10	1.81	1.45	1.10	0.81	0.57	0.40	22.2	16.1
-25	0.15	0.23	0.33	0.46	0.62	0.82	1.07	1.35	1.62	1.82	1.89	1.82	1.61	1.31	1.01	0.76	0.55	0.39	17.8	10.9
-30	0.15	0.22	0.31	0.40	0.50	0.62	0.72	0.80	0.85	0.86	0.86	0.82	0.77	0.68	0.58	0.47	0.37	0.28	10.3	0.00
-35	0.10	0.15	0.22	0.29	0.37	0.46	0.56	0.65	0.73	0.79	0.81	0.79	0.73	0.65	0.54	0.44	0.35	0.27	8.89	0.00
-40	0.09	0.13	0.19	0.24	0.29	0.33	0.37	0.40	0.42	0.43	0.43	0.42	0.40	0.37	0.33	0.29	0.24	0.19	5.56	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	3.62	5.56	8.33	12.4	18.6	28.0	41.6	59.1	77.1	89.2	89.3	77.8	60.2	42.7	28.8	19.0	12.5	8.23	682	---
Φ a	0.00	0.00	0.00	2.21	11.5	22.0	36.7	55.0	73.2	85.3	85.4	74.0	56.5	38.6	23.3	13.2	3.52	0.00	---	581

one-half-peak spread: U:13.7,D:18.0 , L:15.5,R:14.8


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.5V I:0.0597A P:7.475W PF:0.5183 Lamp Flux:731.23x1 lm		
NAME: 8.02.038.0026 15°LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

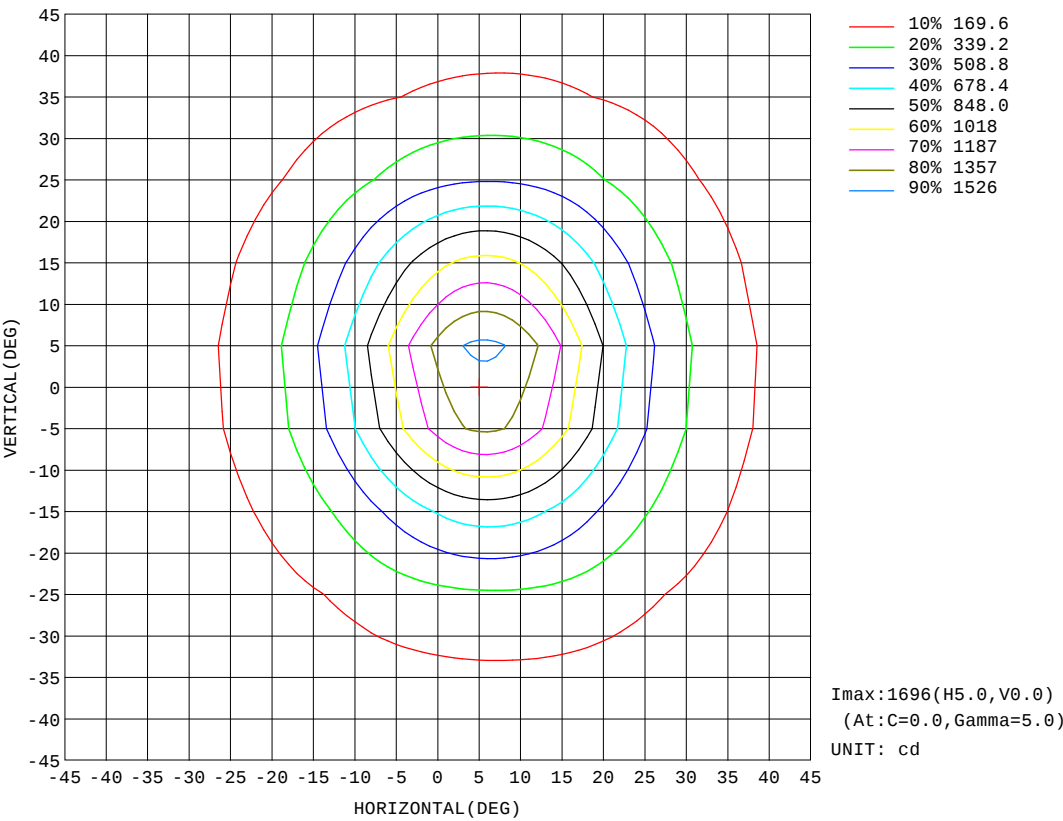


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:241.5V I:0.0597A P:7.475W PF:0.5183 Lamp Flux:731.23x1 lm		
NAME: 8.02.038.0026 15°LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

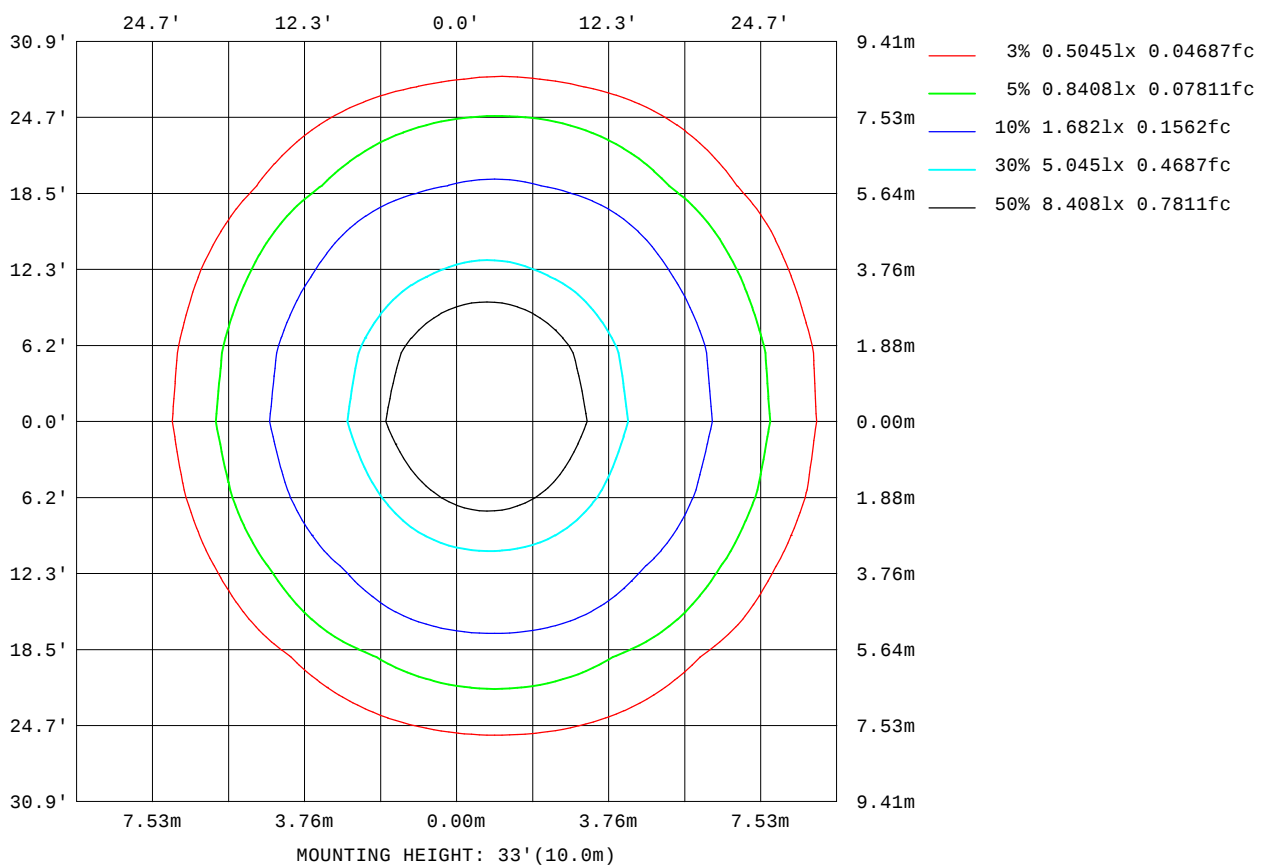


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:241.5V I:0.0597A P:7.475W PF:0.5183 Lamp Flux:731.23x1 lm		
NAME: 8.02.038.0026 15°LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

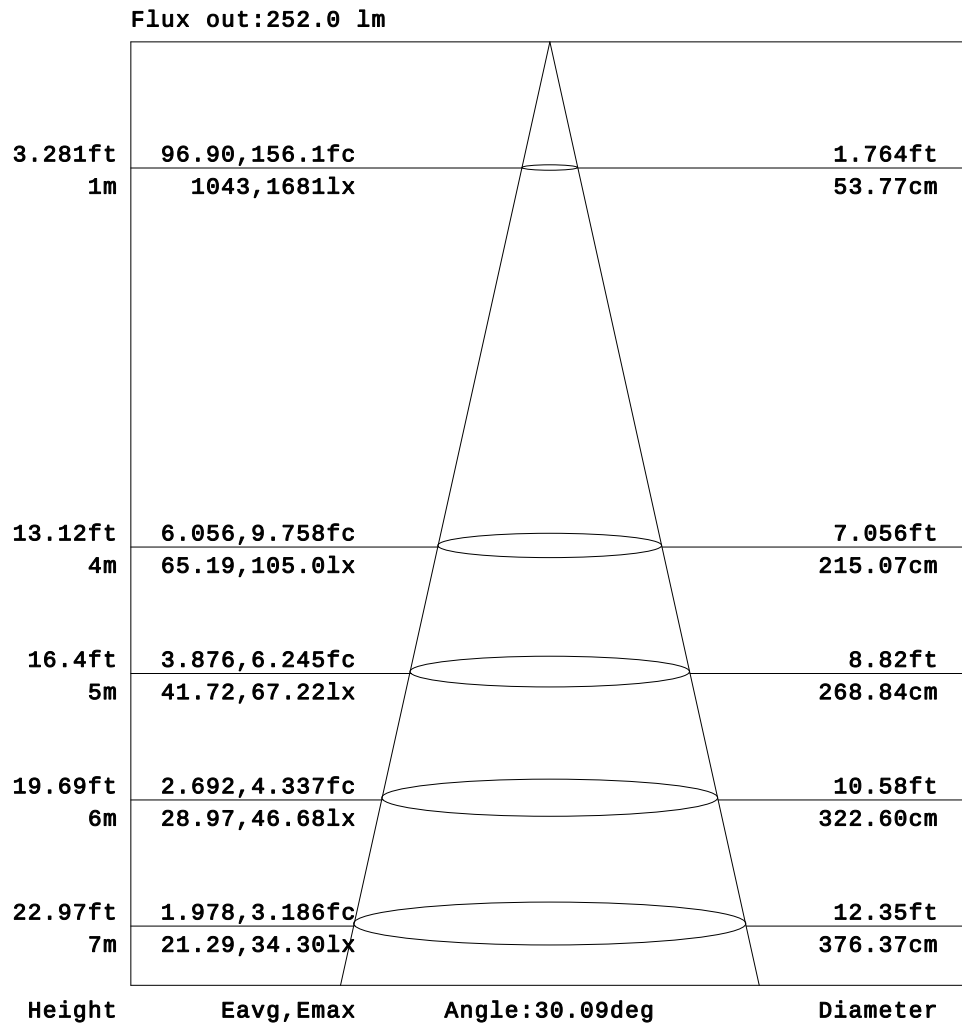


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

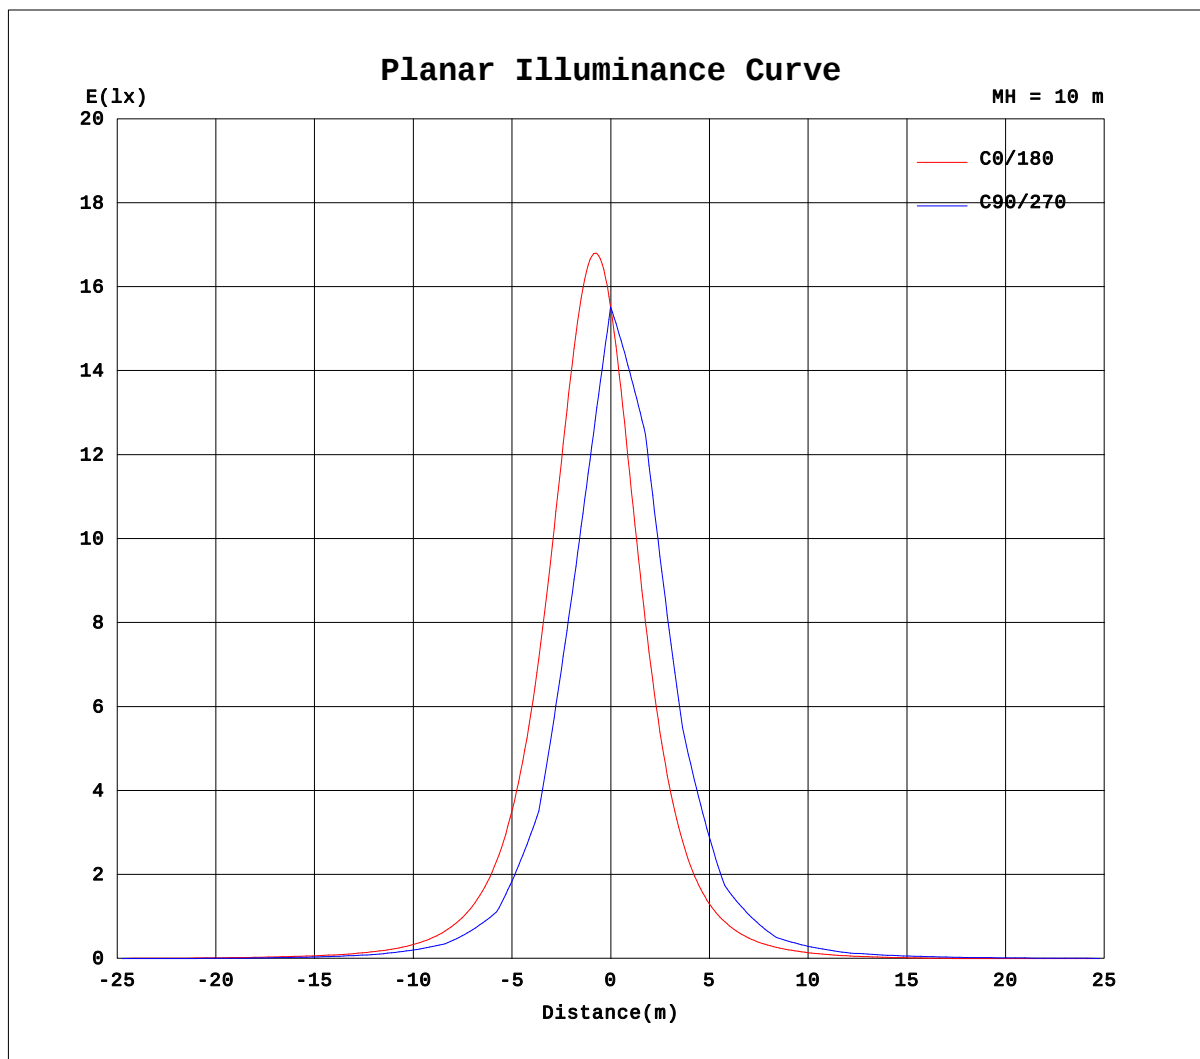

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-05-21

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.5V I:0.0597A P:7.475W PF:0.5183 Lamp Flux:731.23x1 lm		
NAME: 8.02.038.0026 15°LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.72	3.88	5.70	6.71	7.41	7.83	8.19	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	4.24	8.64	11.9	13.7	15.0	15.8	16.6	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.79	3.92	6.47	11.0	15.7	19.6	22.5	24.7	26.3	27.6	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	4.40	8.83	14.0	19.6	24.5	28.6	32.2	35.2	37.4	39.1	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	3.15	7.99	13.5	19.9	26.7	33.1	39.2	45.1	50.4	55.0	58.5	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.36	7.44	13.8	20.7	28.5	36.5	44.2	52.1	60.3	67.6	74.2	79.1	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.84	9.51	16.8	25.2	34.8	45.2	56.6	69.4	84.0	99.1	113	125	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.15	6.73	14.3	23.0	33.3	45.2	58.3	73.8	92.4	114	137	158	174	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.75	7.26	15.5	25.1	36.9	51.2	68.7	91.1	121	159	205	255	295	
-20	0.00	0.00	0.00	0.00	0.00	0.00	3.01	10.9	20.3	31.5	45.8	63.5	87.3	119	163	221	293	370	429	
-15	0.00	0.00	0.00	0.00	0.00	0.00	2.59	10.7	20.5	32.2	47.4	67.6	96.3	138	200	289	412	559	690	
-10	0.00	0.00	0.00	0.00	0.00	0.00	5.29	14.2	24.8	38.4	56.2	81.3	119	178	267	401	588	806	992	
-5	0.00	0.00	0.00	0.00	0.00	0.00	4.42	13.3	23.9	37.3	55.1	80.6	120	183	284	443	676	967	1242	
0	0.00	0.00	0.00	0.00	0.00	0.00	6.85	16.3	27.7	42.5	62.8	93.1	141	220	354	565	874	1248	1578	
5	0.00	0.00	0.00	0.00	0.00	0.00	4.97	14.0	24.8	38.5	56.8	83.3	125	193	306	485	752	1086	1403	
10	0.00	0.00	0.00	0.00	0.00	0.01	6.43	15.7	26.8	40.9	60.0	87.5	131	203	317	497	756	1063	1327	
15	0.00	0.00	0.00	0.00	0.00	0.00	4.36	13.0	23.2	35.7	51.9	74.3	108	161	244	371	553	771	969	
20	0.00	0.00	0.00	0.00	0.00	0.00	5.50	14.1	24.0	36.3	51.6	72.3	102	147	213	310	434	567	671	
25	0.00	0.00	0.00	0.00	0.00	0.00	2.75	10.6	19.7	30.0	42.9	59.1	81.0	111	156	218	299	386	460	
30	0.00	0.00	0.00	0.00	0.00	0.00	3.07	10.6	19.1	28.4	40.1	53.4	70.1	91.7	121	157	198	239	271	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.78	7.02	14.5	22.6	32.2	43.1	55.4	70.4	89.7	113	140	167	189	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.10	6.34	13.1	20.3	28.6	37.3	46.2	56.0	67.3	79.9	92.7	105	114	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.51	8.14	14.4	21.2	28.7	36.1	43.4	51.3	60.0	68.5	76.8	83.4	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	5.64	11.0	16.7	23.2	28.9	33.8	38.7	43.6	47.7	51.8	54.9	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.30	5.07	9.72	15.1	20.6	25.7	29.7	33.3	36.3	39.0	41.2	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94	4.69	9.19	14.6	19.3	22.1	24.2	25.9	27.4	28.5	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	1.95	4.12	6.69	9.27	14.2	16.6	17.5	18.3	19.1	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	7.78	9.36	9.43	9.58	10.2	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.44	4.68	4.69	4.75	5.03	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.5V I:0.0597A P:7.475W PF:0.5183 Lamp Flux:731.23x1 lm		
NAME: 8.02.038.0026 15°LLS-WZB-W40-L3-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240500081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	1.16	2.48	2.59	1.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.17	2.94	5.14	4.99	1.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	8.65	9.18	10.9	12.3	12.2	10.4	8.32	6.93	4.84	3.26	1.88	0.49	0.00	0.00	0.00	0.00	0.00	0.00
-60	17.5	18.6	19.5	19.7	19.1	18.0	16.2	12.9	9.02	5.90	3.26	0.34	0.00	0.00	0.00	0.00	0.00	0.00
-55	28.6	29.5	30.0	29.7	28.5	26.6	24.1	20.9	16.9	12.8	8.57	4.70	1.96	0.00	0.00	0.00	0.00	0.00
-50	40.2	40.6	40.6	39.4	37.2	34.3	30.9	27.3	23.3	17.8	12.4	7.52	2.95	0.00	0.00	0.00	0.00	0.00
-45	60.8	61.3	60.2	57.5	53.1	47.8	42.2	36.5	30.8	24.7	18.4	12.1	6.65	1.76	0.00	0.00	0.00	0.00
-40	81.8	81.9	79.1	74.1	67.0	59.1	51.3	43.5	36.0	29.0	21.8	14.5	8.23	2.30	0.00	0.00	0.00	0.00
-35	131	131	125	114	99.2	83.7	69.3	56.6	45.5	36.0	27.5	19.1	11.7	5.19	0.17	0.00	0.00	0.00
-30	182	180	168	148	125	102	81.9	65.1	51.1	39.4	29.8	20.6	12.6	5.48	0.00	0.00	0.00	0.00
-25	317	314	286	241	192	148	112	84.1	63.2	47.4	35.2	25.2	16.0	8.18	1.11	0.00	0.00	0.00
-20	455	440	389	314	239	178	129	93.8	68.3	50.1	36.5	25.8	16.1	7.94	0.59	0.00	0.00	0.00
-15	758	733	629	486	350	245	169	117	82.1	58.3	41.7	29.7	19.1	10.3	2.41	0.00	0.00	0.00
-10	1067	995	815	599	414	276	184	124	84.9	58.9	41.5	29.1	18.3	9.45	1.32	0.00	0.00	0.00
-5	1380	1301	1059	770	519	339	219	144	95.7	65.4	45.5	32.0	20.7	11.3	2.99	0.00	0.00	0.00
0	1696	1529	1190	830	542	343	218	140	92.2	62.5	43.3	30.2	18.9	9.72	1.41	0.00	0.00	0.00
5	1559	1462	1178	845	563	362	230	149	98.2	66.6	46.2	32.5	20.9	11.4	3.01	0.00	0.00	0.00
10	1424	1302	1034	736	491	319	204	133	89.2	61.1	42.9	30.1	18.8	9.68	1.32	0.00	0.00	0.00
15	1066	1013	843	628	436	292	194	129	88.1	61.5	43.6	31.1	19.8	10.6	2.38	0.00	0.00	0.00
20	710	671	569	437	315	221	153	106	74.4	53.5	38.7	27.5	16.7	8.16	0.51	0.00	0.00	0.00
25	496	483	426	343	258	188	136	97.0	70.5	51.9	38.4	27.5	17.1	8.76	1.15	0.00	0.00	0.00
30	285	279	252	213	170	132	101	76.5	58.1	44.2	33.4	23.2	14.0	6.21	0.00	0.00	0.00	0.00
35	201	200	186	163	135	109	86.2	67.7	53.0	41.4	31.8	22.2	13.5	6.18	0.26	0.00	0.00	0.00
40	119	119	113	102	89.1	76.0	63.7	52.5	42.9	34.4	26.4	17.3	9.98	3.25	0.00	0.00	0.00	0.00
45	87.4	88.1	85.3	79.2	71.1	62.4	53.9	45.8	38.4	31.3	23.5	15.6	8.97	2.81	0.00	0.00	0.00	0.00
50	56.6	57.0	56.0	53.5	49.8	45.4	40.8	36.0	30.9	25.3	17.5	11.0	5.55	0.22	0.00	0.00	0.00	0.00
55	42.7	43.5	43.6	42.4	40.2	37.4	34.2	30.6	26.0	20.2	14.0	8.76	3.85	0.50	0.00	0.00	0.00	0.00
60	29.3	30.2	30.9	30.6	29.6	28.3	26.2	23.5	18.8	12.8	8.27	4.50	0.31	0.00	0.00	0.00	0.00	0.00
65	20.2	21.6	22.8	23.3	23.1	22.2	19.9	15.9	12.3	8.08	4.91	2.65	0.53	0.00	0.00	0.00	0.00	0.00
70	11.7	13.6	15.1	15.9	16.3	15.4	12.0	6.92	4.02	2.01	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	5.69	6.64	7.40	7.89	8.18	7.88	6.53	3.84	2.24	1.15	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-05-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: