IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Indoor Luminaire Photometric Data


Description Information

Luminary Name: F16A-24V-3528-144-5700K		Lum. Catelog:	Test ID: 001
Lamp Name: LED		Lamp Catelog: F16A-24V-3528-144	Test Date: 2018/11/19
Manufacture: Olympia Lighting Co., Ltd		Shld.Ang(°):	Test Machine:GON-2000
Test Lab: LAB001		Frequency(Hz):	Lamp CCT(K): Ra:
Lum.Size(W*L*H):0.015m*1.000m*0.015m		Lum.Area(m2):0.030	Lum.W(kg): 0.300
Test System: C, γ	Test Step: C=45.0 γ=1.0	Temp.(℃): 25	Humidity(%):

Character Parameter


Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 414.040	Luminary Flux(lm): 414.044	Field Angle(10%Imax): 170.4(°)
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 404.208lm 97.62%
Rated Voltage(V):	Luminary EER(lm/W): 51.117	Up Lumens&Percent: 9.836lm 2.38%
Tested Power(W): 8.100	Max.Candela(cd): 134.782	S/MH: C0_a180=1.270 C90_270=1.272
Lamps' Inside: 1	Max Cand@Ang.(°): C=180.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics(V,A,pf):24.0,0.339,1.000	Beam Angle(50%Imax): 115.8(°)	ErP Φuse(120°): 310.073lm
Lamp Size(W*L*H):0.015m*1.000m*0.015m	Left=-57.8° ,Right=58.0°	IRF(%): 107.338

C Plane Distribution Diagram

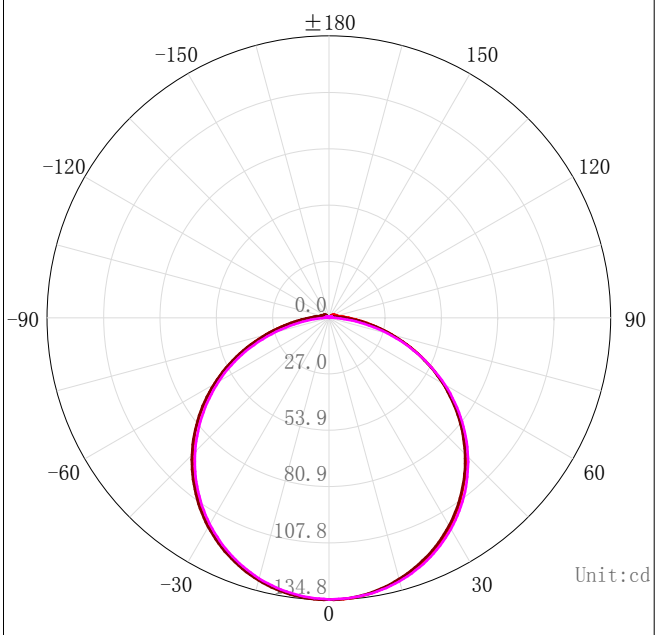

C Plane	[50%MaxAng.]	[10%MaxAng.]
C180.0_360.0:	115.8	170.4
C0.0_180.0 :	115.8	170.4
C90.0_270.0 :	115.3	162.4

C0 Space ISO Illuminance Curve

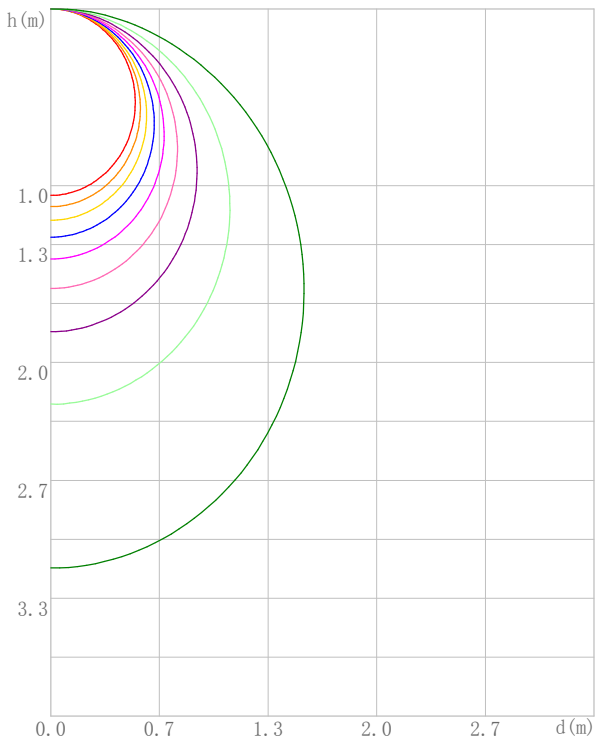


[Unit:lx] [EMax]=134.684 —[EMax*90%] —[EMax*80%] —[EMax*70%] —[EMax*60%] —[EMax*50%] —[EMax*40%] —[EMax*30%] —[EMax*20%] —[EMax*10%]


IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

2D Plane Light Intensity Distribution Curve

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

C Plane Distribution Diagram

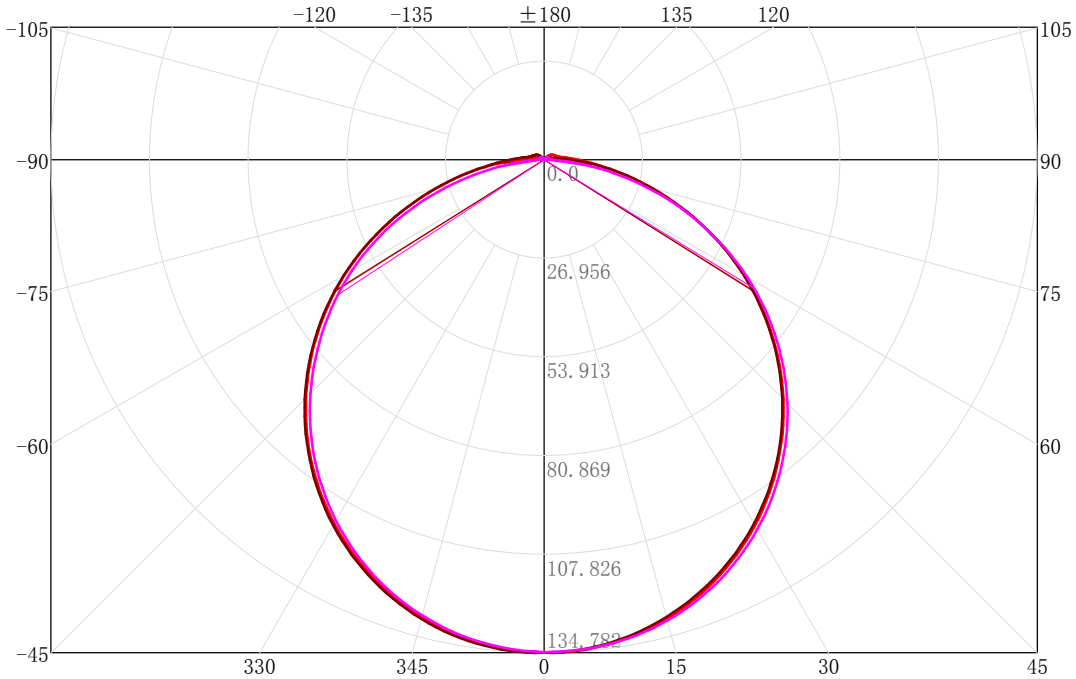

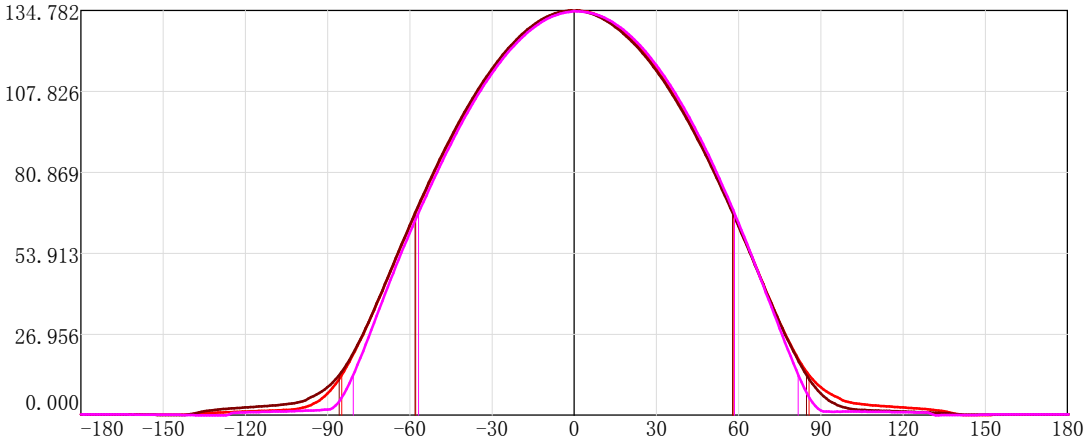


C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
C180.0_360.0:	115.8	170.4	
C0.0_180.0 :	115.8	170.4	
C90.0_270.0 :	115.3	162.4	

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

3D Light Intensity Distribution Modal

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144-	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

3D Light Intensity Distribution Modal

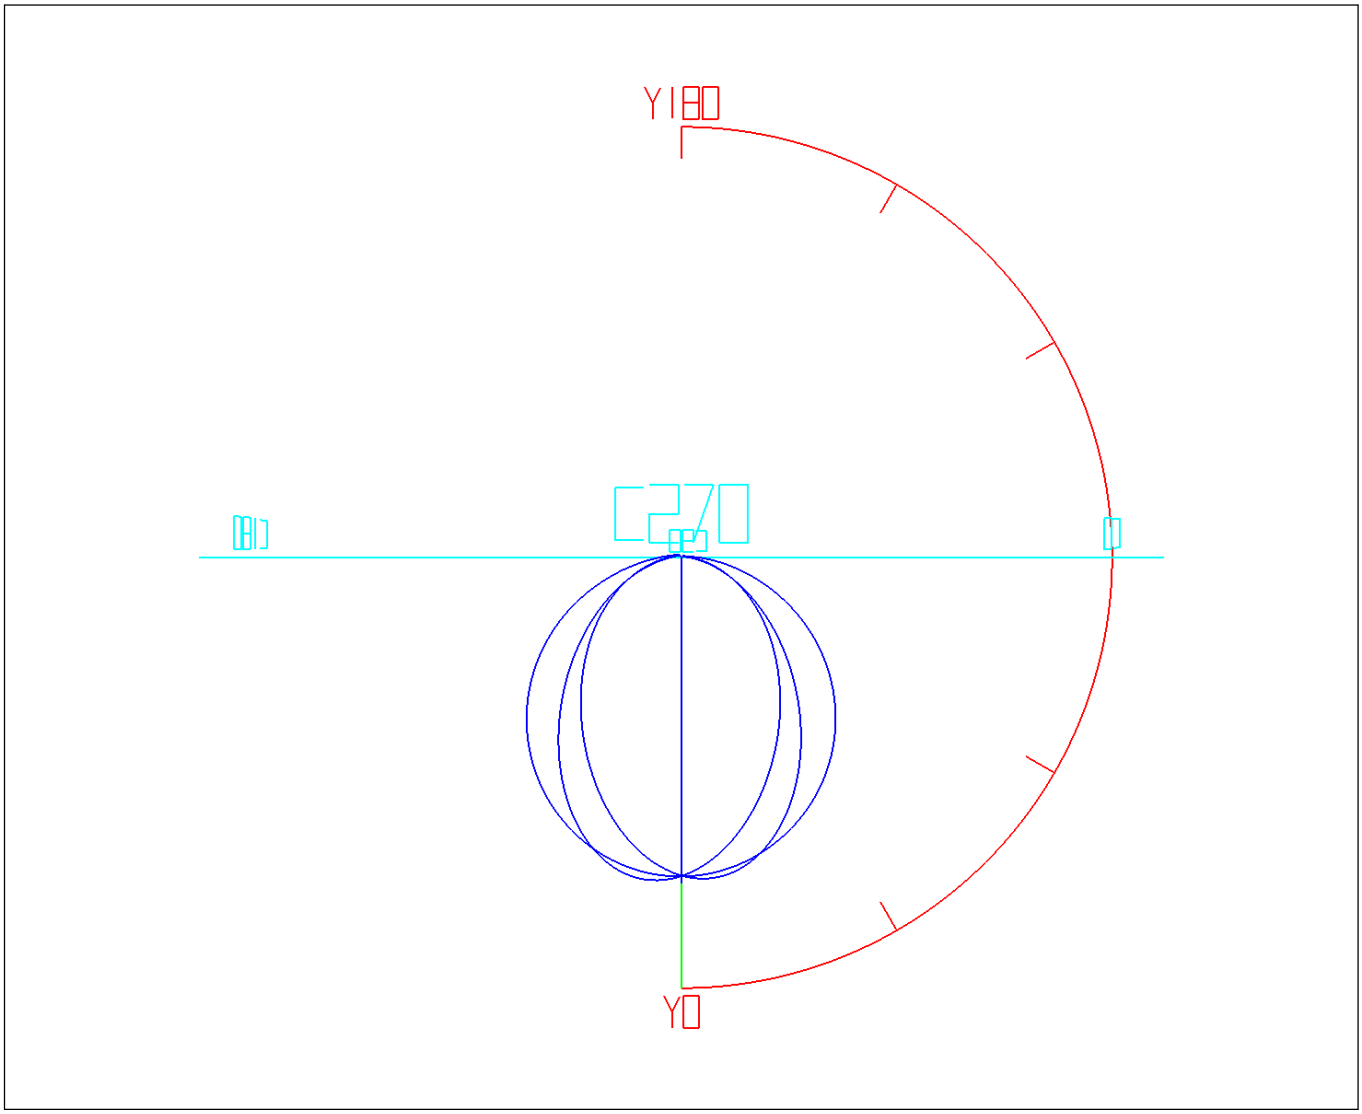

Curves: 3D Model Fixture Vert. HUD Hori. HUD

View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.13	0.13	0.03	0.03	47.0-48.0	7.10	229.93	1.71	55.53
1.0-2.0	0.39	0.51	0.09	0.12	48.0-49.0	7.06	236.99	1.70	57.24
2.0-3.0	0.64	1.16	0.16	0.28	49.0-50.0	7.01	244.00	1.69	58.93
3.0-4.0	0.90	2.06	0.22	0.50	50.0-51.0	6.95	250.95	1.68	60.61
4.0-5.0	1.15	3.21	0.28	0.78	51.0-52.0	6.89	257.84	1.66	62.27
5.0-6.0	1.41	4.62	0.34	1.12	52.0-53.0	6.81	264.65	1.64	63.92
6.0-7.0	1.66	6.28	0.40	1.52	53.0-54.0	6.73	271.38	1.62	65.54
7.0-8.0	1.91	8.18	0.46	1.98	54.0-55.0	6.63	278.01	1.60	67.15
8.0-9.0	2.15	10.34	0.52	2.50	55.0-56.0	6.53	284.54	1.58	68.72
9.0-10.0	2.40	12.74	0.58	3.08	56.0-57.0	6.42	290.96	1.55	70.27
10.0-11.0	2.64	15.38	0.64	3.71	57.0-58.0	6.30	297.26	1.52	71.79
11.0-12.0	2.88	18.25	0.69	4.41	58.0-59.0	6.17	303.43	1.49	73.29
12.0-13.0	3.11	21.37	0.75	5.16	59.0-60.0	6.04	309.47	1.46	74.74
13.0-14.0	3.34	24.71	0.81	5.97	60.0-61.0	5.90	315.37	1.42	76.17
14.0-15.0	3.57	28.27	0.86	6.83	61.0-62.0	5.74	321.11	1.39	77.56
15.0-16.0	3.79	32.06	0.91	7.74	62.0-63.0	5.59	326.70	1.35	78.91
16.0-17.0	4.00	36.06	0.97	8.71	63.0-64.0	5.42	332.12	1.31	80.21
17.0-18.0	4.21	40.27	1.02	9.73	64.0-65.0	5.25	337.37	1.27	81.48
18.0-19.0	4.42	44.69	1.07	10.79	65.0-66.0	5.07	342.43	1.22	82.71
19.0-20.0	4.62	49.31	1.12	11.91	66.0-67.0	4.88	347.32	1.18	83.88
20.0-21.0	4.81	54.12	1.16	13.07	67.0-68.0	4.69	352.01	1.13	85.02
21.0-22.0	5.00	59.12	1.21	14.28	68.0-69.0	4.49	356.50	1.09	86.10
22.0-23.0	5.18	64.30	1.25	15.53	69.0-70.0	4.29	360.79	1.04	87.14
23.0-24.0	5.35	69.65	1.29	16.82	70.0-71.0	4.08	364.87	0.99	88.13
24.0-25.0	5.52	75.17	1.33	18.16	71.0-72.0	3.87	368.75	0.94	89.06
25.0-26.0	5.68	80.85	1.37	19.53	72.0-73.0	3.66	372.41	0.88	89.94
26.0-27.0	5.83	86.68	1.41	20.94	73.0-74.0	3.44	375.85	0.83	90.78
27.0-28.0	5.98	92.66	1.44	22.38	74.0-75.0	3.23	379.08	0.78	91.56
28.0-29.0	6.12	98.78	1.48	23.86	75.0-76.0	3.01	382.09	0.73	92.28
29.0-30.0	6.25	105.03	1.51	25.37	76.0-77.0	2.79	384.88	0.67	92.96
30.0-31.0	6.37	111.40	1.54	26.91	77.0-78.0	2.58	387.46	0.62	93.58
31.0-32.0	6.48	117.88	1.57	28.47	78.0-79.0	2.37	389.83	0.57	94.15
32.0-33.0	6.59	124.47	1.59	30.06	79.0-80.0	2.16	392.00	0.52	94.68
33.0-34.0	6.69	131.16	1.61	31.68	80.0-81.0	1.96	393.96	0.47	95.15
34.0-35.0	6.77	137.93	1.64	33.31	81.0-82.0	1.77	395.73	0.43	95.58
35.0-36.0	6.85	144.78	1.66	34.97	82.0-83.0	1.58	397.31	0.38	95.96
36.0-37.0	6.92	151.71	1.67	36.64	83.0-84.0	1.41	398.72	0.34	96.30
37.0-38.0	6.99	158.69	1.69	38.33	84.0-85.0	1.24	399.96	0.30	96.60
38.0-39.0	7.04	165.73	1.70	40.03	85.0-86.0	1.09	401.05	0.26	96.86
39.0-40.0	7.08	172.81	1.71	41.74	86.0-87.0	0.95	402.00	0.23	97.09
40.0-41.0	7.12	179.93	1.72	43.46	87.0-88.0	0.83	402.83	0.20	97.29
41.0-42.0	7.14	187.07	1.72	45.18	88.0-89.0	0.73	403.56	0.18	97.47
42.0-43.0	7.16	194.23	1.73	46.91	89.0-90.0	0.64	404.21	0.16	97.63
43.0-44.0	7.16	201.39	1.73	48.64	90.0-91.0	0.58	404.78	0.14	97.76
44.0-45.0	7.16	208.56	1.73	50.37	91.0-92.0	0.52	405.30	0.13	97.89
45.0-46.0	7.15	215.71	1.73	52.10	92.0-93.0	0.47	405.77	0.11	98.00
46.0-47.0	7.13	222.83	1.72	53.82	93.0-94.0	0.43	406.21	0.10	98.11

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Zonal Flux Tabulation - (Cont.)


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.40	406.60	0.10	98.20
95.0-96.0	0.36	406.96	0.09	98.29
96.0-97.0	0.34	407.30	0.08	98.37
97.0-98.0	0.31	407.61	0.08	98.45
98.0-99.0	0.29	407.91	0.07	98.52
99.0-100.0	0.28	408.18	0.07	98.59
100.0-101.0	0.27	408.45	0.06	98.65
101.0-102.0	0.26	408.71	0.06	98.71
102.0-103.0	0.25	408.95	0.06	98.77
103.0-104.0	0.24	409.20	0.06	98.83
104.0-105.0	0.23	409.43	0.06	98.89
105.0-106.0	0.23	409.66	0.05	98.94
106.0-107.0	0.22	409.88	0.05	98.99
107.0-108.0	0.21	410.09	0.05	99.05
108.0-109.0	0.21	410.30	0.05	99.10
109.0-110.0	0.20	410.50	0.05	99.14
110.0-111.0	0.19	410.69	0.05	99.19
111.0-112.0	0.19	410.88	0.05	99.24
112.0-113.0	0.18	411.06	0.04	99.28
113.0-114.0	0.18	411.24	0.04	99.32
114.0-115.0	0.17	411.41	0.04	99.36
115.0-116.0	0.17	411.58	0.04	99.41
116.0-117.0	0.16	411.74	0.04	99.44
117.0-118.0	0.16	411.89	0.04	99.48
118.0-119.0	0.15	412.05	0.04	99.52
119.0-120.0	0.15	412.19	0.04	99.55
120.0-121.0	0.14	412.33	0.03	99.59
121.0-122.0	0.13	412.47	0.03	99.62
122.0-123.0	0.13	412.59	0.03	99.65
123.0-124.0	0.12	412.72	0.03	99.68
124.0-125.0	0.12	412.83	0.03	99.71
125.0-126.0	0.11	412.94	0.03	99.73
126.0-127.0	0.10	413.04	0.02	99.76
127.0-128.0	0.09	413.12	0.02	99.78
128.0-129.0	0.08	413.20	0.02	99.80
129.0-130.0	0.07	413.27	0.02	99.82
130.0-131.0	0.06	413.34	0.01	99.83
131.0-132.0	0.05	413.39	0.01	99.84
132.0-133.0	0.05	413.43	0.01	99.85
133.0-134.0	0.04	413.48	0.01	99.86
134.0-135.0	0.04	413.52	0.01	99.87
135.0-136.0	0.04	413.55	0.01	99.88
136.0-137.0	0.03	413.58	0.01	99.89
137.0-138.0	0.03	413.61	0.01	99.90
138.0-139.0	0.03	413.64	0.01	99.90
139.0-140.0	0.02	413.66	0.01	99.91
140.0-141.0	0.02	413.68	0.00	99.91
141.0-142.0	0.02	413.70	0.00	99.92
142.0-143.0	0.02	413.71	0.00	99.92
143.0-144.0	0.02	413.73	0.00	99.92
144.0-145.0	0.02	413.74	0.00	99.93
145.0-146.0	0.01	413.76	0.00	99.93
146.0-147.0	0.01	413.77	0.00	99.94
147.0-148.0	0.01	413.79	0.00	99.94
148.0-149.0	0.01	413.80	0.00	99.94
149.0-150.0	0.01	413.81	0.00	99.95
150.0-151.0	0.01	413.83	0.00	99.95
151.0-152.0	0.01	413.84	0.00	99.95
152.0-153.0	0.01	413.85	0.00	99.96
153.0-154.0	0.01	413.87	0.00	99.96
154.0-155.0	0.01	413.88	0.00	99.96
155.0-156.0	0.01	413.89	0.00	99.96
156.0-157.0	0.01	413.90	0.00	99.97
157.0-158.0	0.01	413.91	0.00	99.97
158.0-159.0	0.01	413.92	0.00	99.97
159.0-160.0	0.01	413.93	0.00	99.97
160.0-161.0	0.01	413.94	0.00	99.98
161.0-162.0	0.01	413.95	0.00	99.98
162.0-163.0	0.01	413.96	0.00	99.98
163.0-164.0	0.01	413.97	0.00	99.98
164.0-165.0	0.01	413.98	0.00	99.98
165.0-166.0	0.01	413.99	0.00	99.99
166.0-167.0	0.01	413.99	0.00	99.99
167.0-168.0	0.01	414.00	0.00	99.99
168.0-169.0	0.01	414.01	0.00	99.99
169.0-170.0	0.01	414.01	0.00	99.99
170.0-171.0	0.01	414.02	0.00	99.99
171.0-172.0	0.01	414.02	0.00	100.00
172.0-173.0	0.00	414.03	0.00	100.00
173.0-174.0	0.00	414.03	0.00	100.00
174.0-175.0	0.00	414.04	0.00	100.00
175.0-176.0	0.00	414.04	0.00	100.00
176.0-177.0	0.00	414.04	0.00	100.00
177.0-178.0	0.00	414.04	0.00	100.00
178.0-179.0	0.00	414.04	0.00	100.00
179.0-180.0	0.00	414.04	0.00	100.00

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Rectangle ISO Lighting Intensity Diagram

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

ISO Lighting Intensity Curve

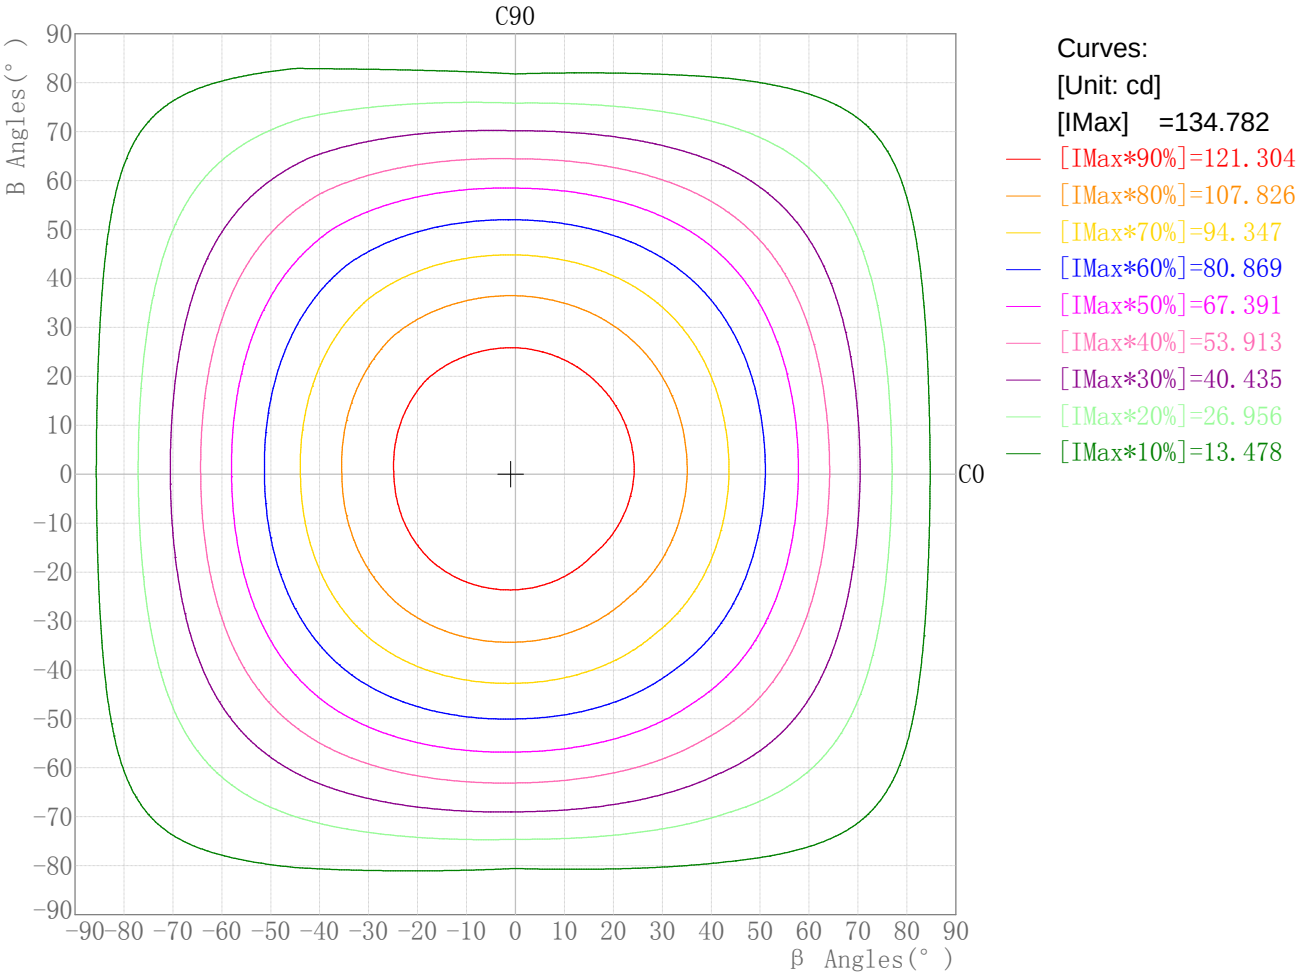


Maximum Light Intensity(cd): 134.78
Maximum Cand.@Angle: H=-1.0°,V=0.0°

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Plane ISO-Illuminance Diagram

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

Plane ISO-Illuminance Curve

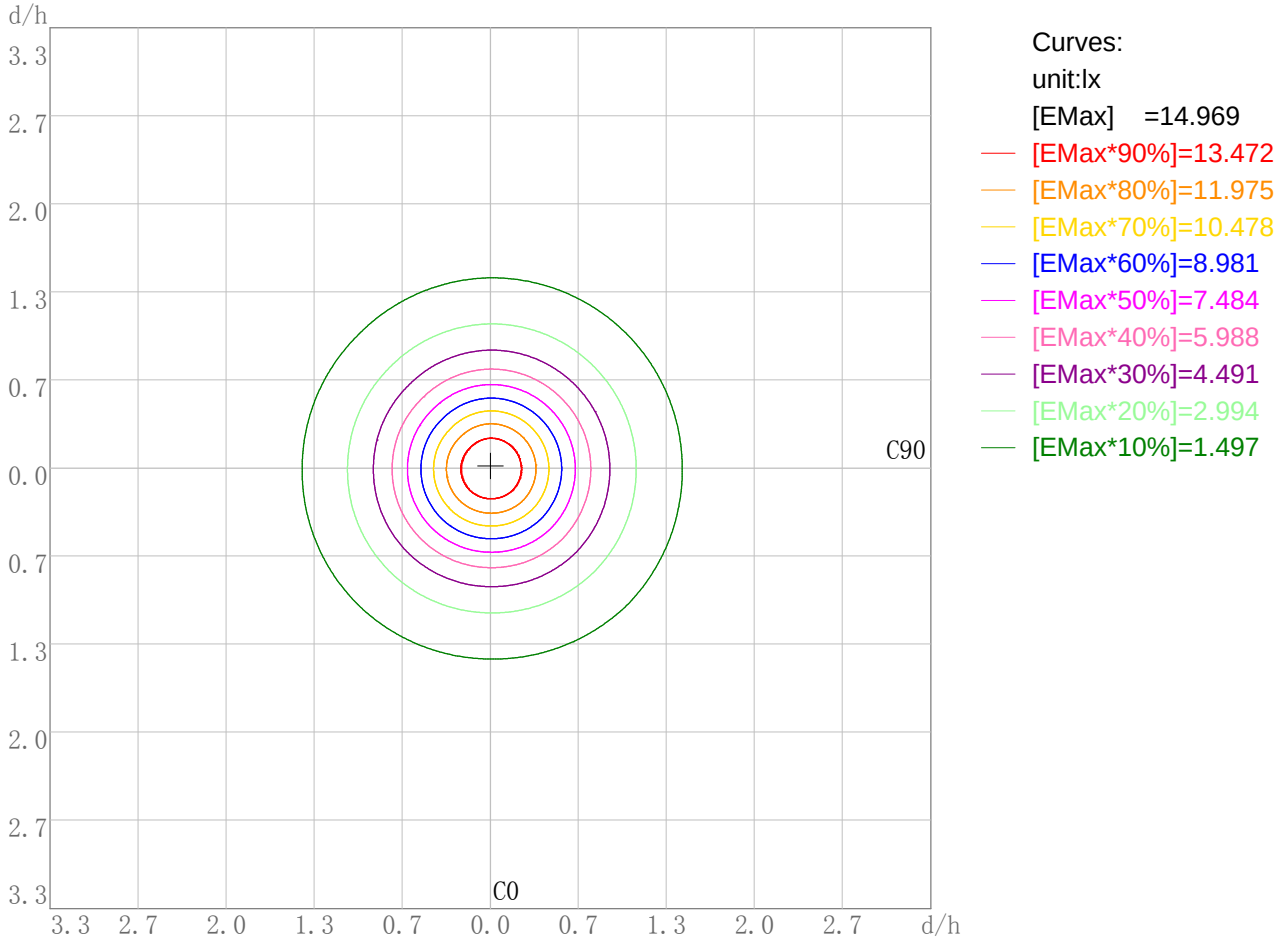


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 14.97
Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

3D Plane ISO Illuminance Diagram

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

3D Plane Illuminance Modal

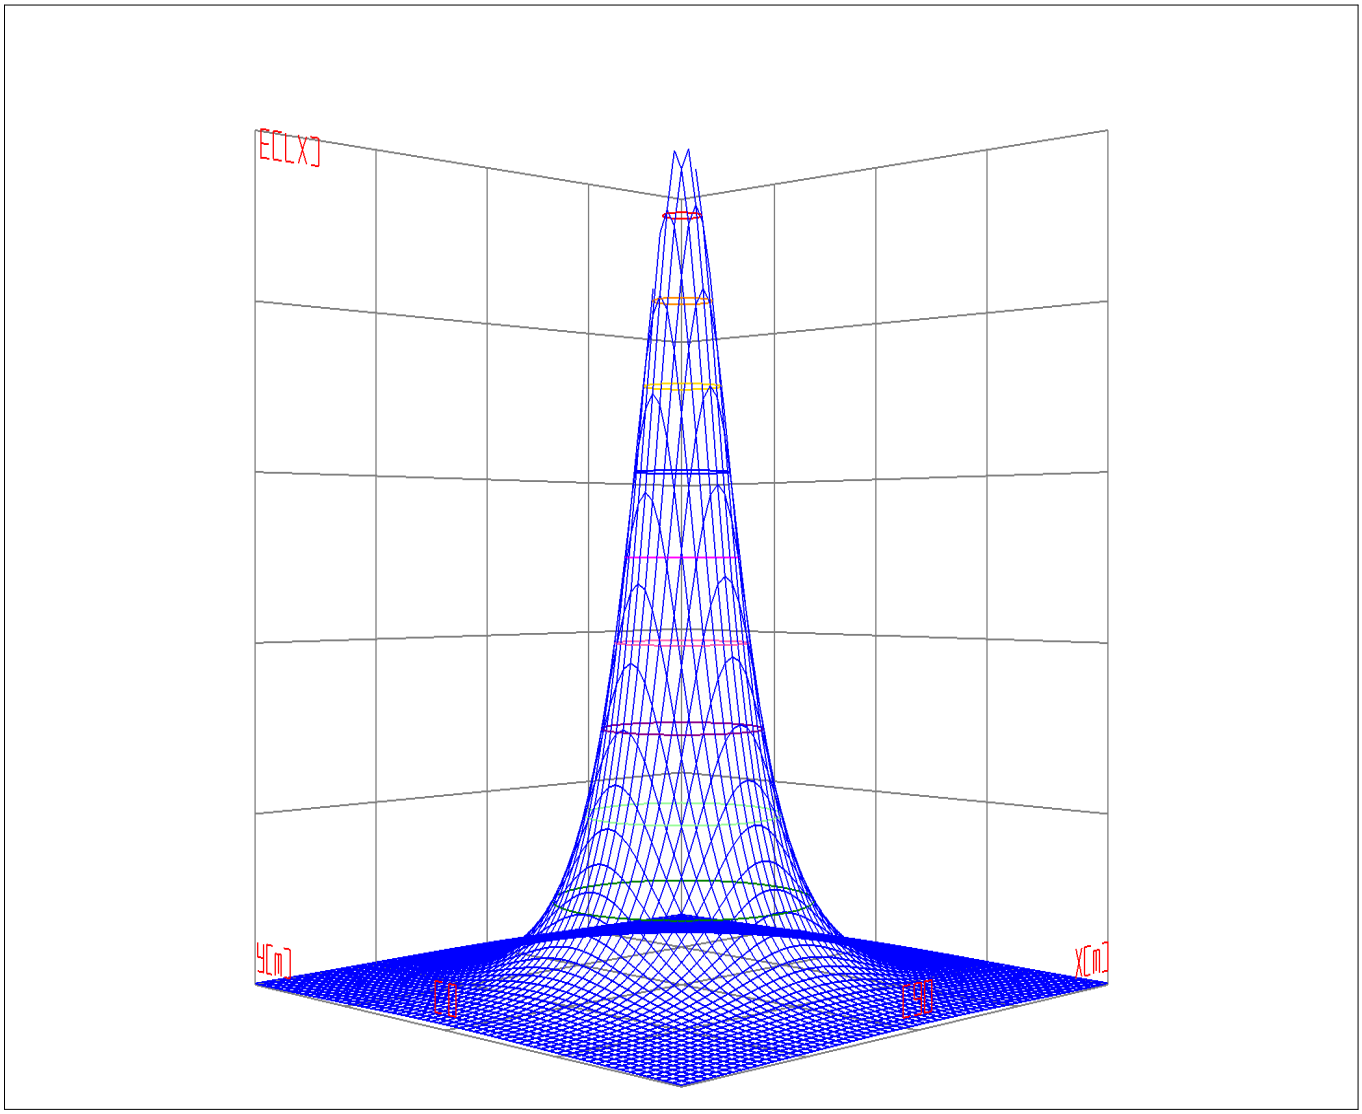

Curves: 3D Model 90% 80% 70% 60% 50% 40% 30% 20% 10%


View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Space ISO Illuminance Diagram

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

Space ISO Illuminance Curve

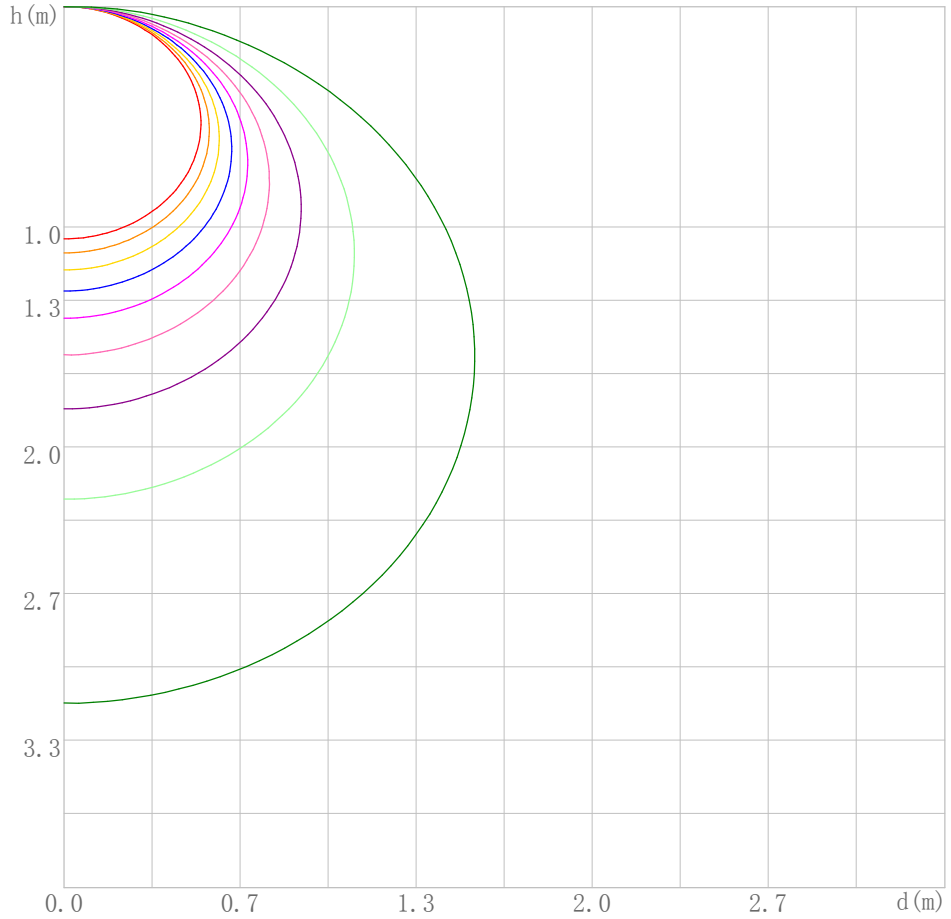

Curves:
[Unit: lx]
[EMax] =134.684
[EMax*90%]=121.216
[EMax*80%]=107.748
[EMax*70%]=94.279
[EMax*60%]=80.811
[EMax*50%]=67.342
[EMax*40%]=53.874
[EMax*30%]=40.405
[EMax*20%]=26.937
[EMax*10%]=13.468


Space Plane Maximum Illuminance and @Angle:134.68lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:134.746cd,0eg

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Illuminance-Distance Diagram

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

Illuminance-Distance Curve

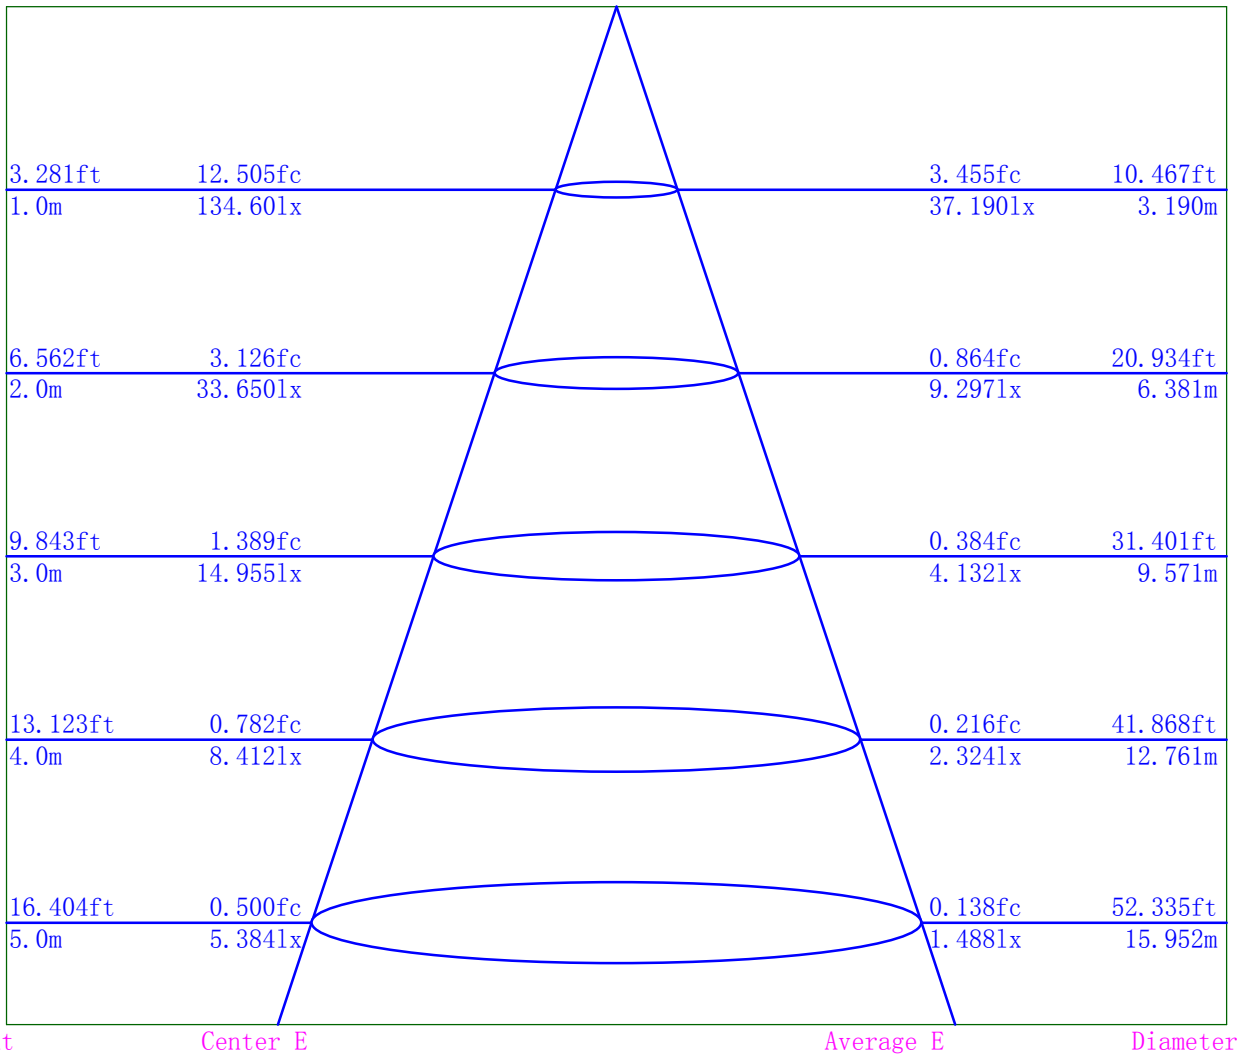

Beam Angle:115.8

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Indoor Luminance Limiting Curves

Lum.Name:	F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name:	LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture:	Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19


Glare Grade Table

GI	Quality	Using Illuminace							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	4336	4298	4251	4192	4117	4033	3977	4091	5012
C90	4432	4396	4344	4267	4151	3981	3724	3329	2772

Luminance Limiting Curve

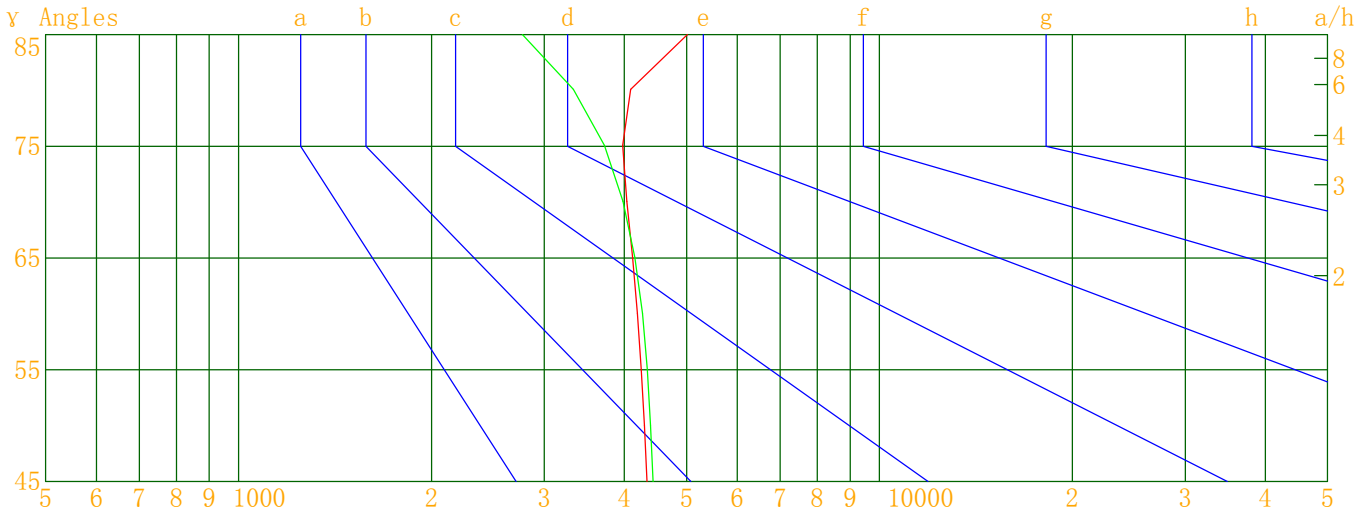

Luminous Size: Length(m)=1.000 Width(m)=0.015 Height(m)=0.015 Area(m^2)=0.030000


Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: C90-C270 Color:

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Indoor Budgetary Estimate Table

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

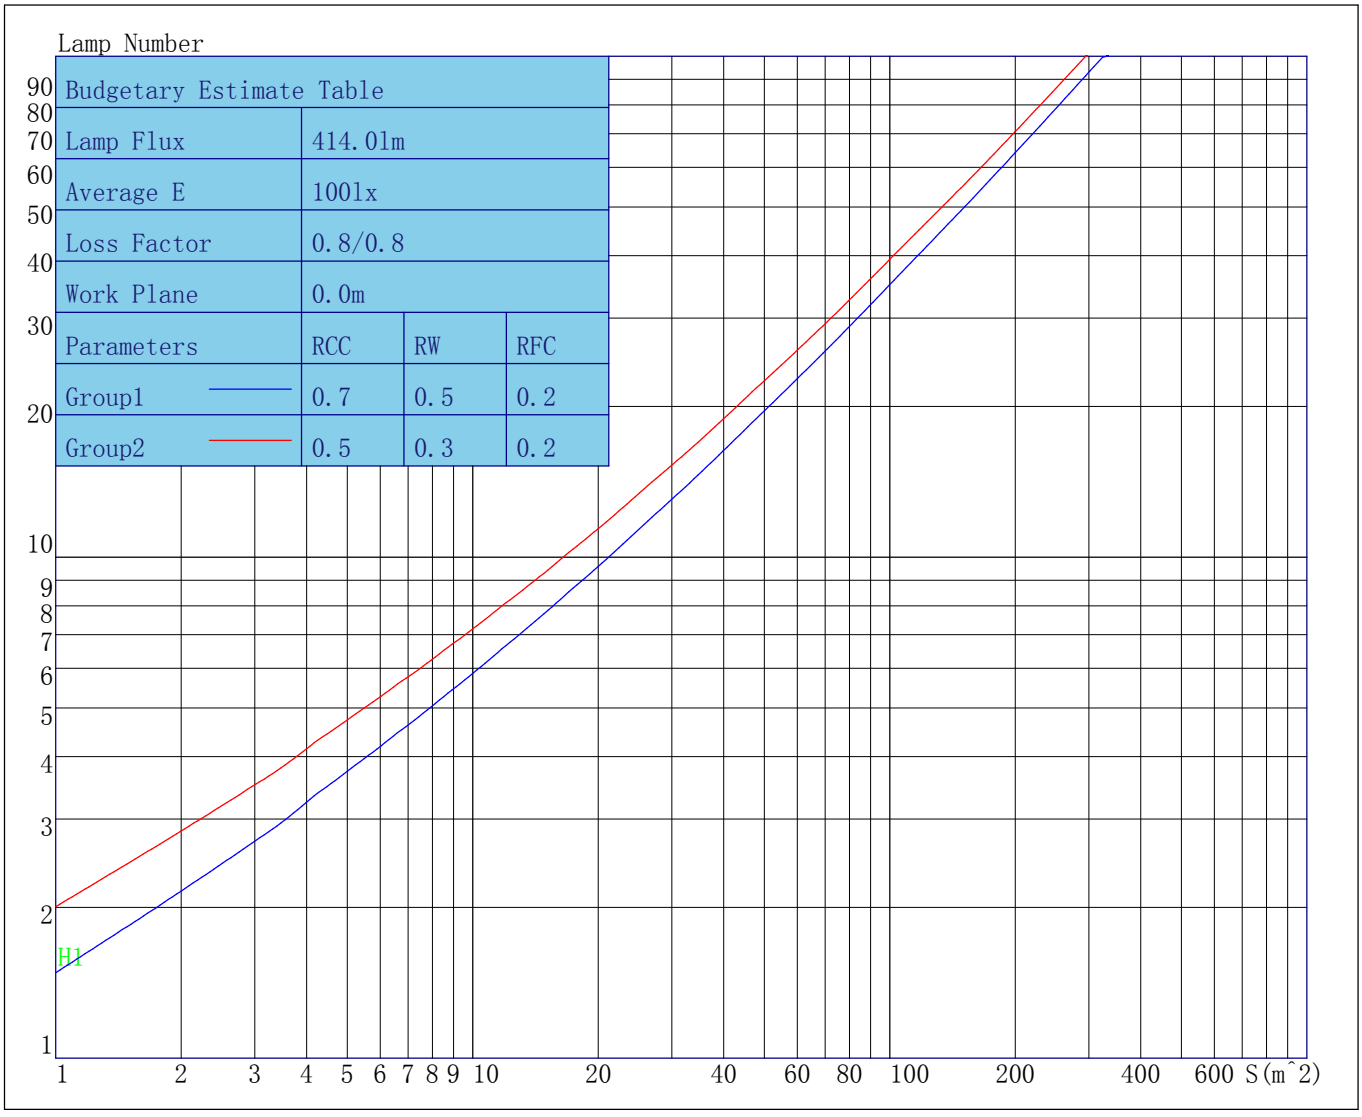

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Indoor Coefficient of Utilization Table

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC(%)	80				70				50			30			10			0
RhoW(%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	115	115	115	115	110	110	110	105	105	105	100	100	100	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	80
2	98	89	82	76	95	87	80	75	83	77	73	79	75	71	76	72	69	66
3	89	78	69	63	86	76	68	62	73	66	61	70	64	59	67	62	58	56
4	81	69	60	53	79	67	59	52	64	57	51	62	56	50	59	54	49	47
5	74	61	52	45	72	60	51	45	58	50	44	55	49	44	53	48	43	41
6	69	55	46	39	67	54	45	39	52	44	39	50	43	38	48	42	38	35
7	64	50	41	35	62	49	41	35	47	40	34	46	39	34	44	38	33	31
8	59	45	37	31	57	45	36	31	43	36	30	42	35	30	40	34	30	28
9	55	42	33	28	54	41	33	28	40	32	27	38	32	27	37	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	25	35	29	24	23

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Unified Glare Rating Table

Lum.Name: F16A-24V-3528-144-5700K	Lum.Catelog:	Test ID: 001
Lamp Name: LED	Lamp Catelog: F16A-24V-3528-144	Test Lab: LAB001
Manufacture: Olympia Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2018/11/19

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	17.2	18.8	17.6	19.2	19.6	17.4	19.0	17.8	19.4	19.8
	Y=3H	19.0	20.5	19.4	20.8	21.2	19.1	20.6	19.6	21.0	21.4
	Y=4H	19.8	21.1	20.2	21.5	22.0	19.8	21.2	20.3	21.6	22.0
	Y=6H	20.4	21.7	20.9	22.1	22.6	20.4	21.6	20.8	22.0	22.5
	Y=8H	20.7	21.9	21.2	22.4	22.8	20.5	21.7	21.0	22.2	22.6
	Y=12H	21.0	22.2	21.5	22.6	23.1	20.6	21.8	21.1	22.2	22.7
X=4H	Y=2H	18.0	19.4	18.4	19.8	20.2	18.2	19.6	18.7	20.0	20.4
	Y=3H	20.0	21.1	20.4	21.6	22.0	20.1	21.3	20.6	21.7	22.2
	Y=4H	20.8	21.9	21.3	22.3	22.8	21.0	22.0	21.4	22.5	23.0
	Y=6H	21.7	22.6	22.1	23.1	23.6	21.6	22.5	22.1	23.0	23.5
	Y=8H	22.0	22.9	22.5	23.4	23.9	21.8	22.7	22.3	23.2	23.7
	Y=12H	22.4	23.1	22.9	23.7	24.2	22.0	22.8	22.5	23.3	23.8
X=8H	Y=4H	21.2	22.0	21.7	22.5	23.1	21.4	22.2	21.9	22.7	23.2
	Y=6H	22.1	22.9	22.7	23.4	24.0	22.2	22.9	22.7	23.4	24.1
	Y=8H	22.6	23.2	23.1	23.8	24.3	22.5	23.1	23.0	23.7	24.2
	Y=12H	23.1	23.7	23.6	24.2	24.8	22.8	23.3	23.3	23.9	24.5
X=12H	Y=4H	21.2	22.0	21.7	22.5	23.0	21.4	22.2	21.9	22.7	23.2
	Y=6H	22.2	22.9	22.8	23.4	24.0	22.3	22.9	22.9	23.4	24.0
	Y=8H	22.7	23.3	23.3	23.8	24.5	22.7	23.2	23.2	23.8	24.4
Variations with the objerver position at spacings											
S=1.0H		0.3/-0.3					0.5/-0.5				
S=1.5H		0.6/-0.6					0.8/-0.9				
S=2.0H		0.7/-0.8					0.9/-1.1				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		3.3					3.1				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Candela Tabulation

V/H	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0
Y 0.0	134.60	134.60	134.60	134.60	134.60	134.60	134.60	134.60
Y 1.0	134.75	134.57	134.47	134.44	134.78	134.57	134.40	134.29
Y 2.0	134.65	134.49	134.45	134.46	134.72	134.51	134.30	134.15
Y 3.0	134.50	134.38	134.39	134.41	134.62	134.40	134.14	133.96
Y 4.0	134.32	134.24	134.27	134.35	134.49	134.24	133.94	133.72
Y 5.0	134.08	134.04	134.12	134.23	134.31	134.04	133.70	133.45
Y 6.0	133.80	133.79	133.95	134.07	134.06	133.78	133.42	133.12
Y 7.0	133.49	133.50	133.71	133.87	133.78	133.48	133.09	132.75
Y 8.0	133.11	133.19	133.45	133.62	133.44	133.17	132.73	132.33
Y 9.0	132.69	132.82	133.14	133.32	133.07	132.79	132.32	131.86
Y 10.0	132.25	132.41	132.79	132.99	132.65	132.36	131.85	131.36
Y 11.0	131.74	131.95	132.39	132.61	132.19	131.89	131.34	130.82
Y 12.0	131.18	131.45	131.93	132.18	131.69	131.37	130.80	130.21
Y 13.0	130.61	130.90	131.46	131.72	131.12	130.80	130.20	129.56
Y 14.0	129.96	130.30	130.92	131.19	130.52	130.19	129.58	128.89
Y 15.0	129.29	129.66	130.33	130.62	129.88	129.53	128.89	128.17
Y 16.0	128.59	128.99	129.72	130.00	129.19	128.85	128.19	127.41
Y 17.0	127.83	128.28	129.05	129.37	128.45	128.12	127.40	126.60
Y 18.0	127.05	127.53	128.34	128.68	127.68	127.34	126.60	125.75
Y 19.0	126.20	126.64	127.58	127.94	126.86	126.50	125.76	124.87
Y 20.0	125.37	125.88	126.78	127.15	126.01	125.65	124.88	123.96
Y 21.0	124.47	124.99	125.96	126.32	125.11	124.74	123.95	123.01
Y 22.0	123.56	124.08	125.08	125.46	124.17	123.81	122.97	122.01
Y 23.0	122.59	123.13	124.16	124.55	123.19	122.83	121.95	120.98
Y 24.0	121.58	122.13	123.21	123.62	122.18	121.80	120.90	119.91
Y 25.0	120.53	121.08	122.20	122.64	121.14	120.74	119.82	118.82
Y 26.0	119.46	120.03	121.16	121.60	120.06	119.64	118.70	117.69
Y 27.0	118.33	118.92	120.07	120.54	118.92	118.52	117.53	116.53
Y 28.0	117.18	117.79	118.95	119.44	117.75	117.34	116.33	115.31
Y 29.0	115.98	116.59	117.78	118.30	116.56	116.05	115.08	114.07
Y 30.0	114.75	115.39	116.58	117.13	115.31	114.87	113.81	112.79
Y 31.0	113.47	114.14	115.34	115.89	114.04	113.59	112.50	111.48
Y 32.0	112.15	112.86	114.06	114.66	112.71	112.28	111.13	110.13
Y 33.0	110.79	111.53	112.73	113.36	111.35	110.91	109.72	108.76
Y 34.0	109.41	110.18	111.38	112.04	109.96	109.52	108.29	107.35
Y 35.0	107.97	108.79	109.97	110.65	108.52	108.09	106.82	105.88
Y 36.0	106.52	107.36	108.53	109.25	107.08	106.64	105.33	104.41
Y 37.0	105.05	105.91	107.05	107.81	105.58	105.14	103.80	102.89
Y 38.0	103.51	104.42	105.57	106.35	104.06	103.61	102.24	101.33
Y 39.0	102.00	102.87	104.01	104.84	102.50	102.04	100.61	99.74
Y 40.0	100.39	101.29	102.43	103.30	100.89	100.45	98.98	98.14
Y 41.0	98.77	99.71	100.81	101.72	99.27	98.82	97.30	96.50
Y 42.0	97.13	98.08	99.17	100.11	97.61	97.17	95.60	94.81
Y 43.0	95.45	96.43	97.47	98.47	95.95	95.48	93.86	93.10
Y 44.0	93.74	94.72	95.77	96.80	94.23	93.77	92.09	91.36
Y 45.0	91.98	92.98	94.02	95.09	92.48	92.01	90.28	89.58
Y 46.0	90.23	91.22	92.22	93.35	90.71	90.22	88.44	87.79

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Candela Tabulation - (Cont.)

V/H	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0
Y 47.0	88.43	89.43	90.40	91.58	88.89	88.41	86.60	85.99
Y 48.0	86.61	87.61	88.55	89.78	87.06	86.57	84.70	84.12
Y 49.0	84.76	85.76	86.68	87.96	85.21	84.70	82.79	82.25
Y 50.0	82.88	83.89	84.77	86.09	83.33	82.82	80.88	80.34
Y 51.0	81.00	81.98	82.82	84.21	81.43	80.88	78.95	78.43
Y 52.0	79.06	80.04	80.84	82.29	79.49	78.93	76.99	76.47
Y 53.0	77.11	78.10	78.83	80.34	77.54	76.96	75.00	74.48
Y 54.0	75.14	76.12	76.81	78.37	75.56	74.95	72.99	72.46
Y 55.0	73.14	74.11	74.74	76.38	73.55	72.92	70.97	70.42
Y 56.0	71.11	72.06	72.64	74.35	71.52	70.86	68.96	68.37
Y 57.0	69.10	70.00	70.52	72.30	69.47	68.80	66.90	66.30
Y 58.0	67.04	67.92	68.37	70.23	67.40	66.68	64.85	64.22
Y 59.0	64.98	65.81	66.20	68.12	65.32	64.57	62.76	62.09
Y 60.0	62.88	63.67	64.00	66.01	63.21	62.42	60.65	59.96
Y 61.0	60.76	61.51	61.77	63.85	61.08	60.26	58.49	57.81
Y 62.0	58.64	59.35	59.52	61.70	58.95	58.09	56.32	55.65
Y 63.0	56.51	57.17	57.26	59.51	56.80	55.88	54.11	53.47
Y 64.0	54.36	54.97	54.95	57.31	54.62	53.67	51.87	51.26
Y 65.0	52.20	52.71	52.63	55.08	52.44	51.43	49.62	49.05
Y 66.0	50.02	50.47	50.29	52.84	50.27	49.19	47.35	46.82
Y 67.0	47.87	48.23	47.95	50.60	48.10	46.94	45.06	44.62
Y 68.0	45.70	45.98	45.58	48.33	45.92	44.69	42.75	42.38
Y 69.0	43.55	43.71	43.21	46.05	43.74	42.43	40.40	40.15
Y 70.0	41.38	41.44	40.85	43.79	41.57	40.16	38.01	37.91
Y 71.0	39.25	39.18	38.45	41.52	39.40	37.90	35.59	35.70
Y 72.0	37.10	36.91	36.04	39.25	37.28	35.63	33.19	33.49
Y 73.0	34.99	34.64	33.64	36.99	35.14	33.39	30.77	31.31
Y 74.0	32.92	32.41	31.28	34.74	33.07	31.17	28.37	29.14
Y 75.0	30.88	30.19	28.92	32.52	31.04	28.99	25.99	27.02
Y 76.0	28.87	28.01	26.53	30.32	29.06	26.84	23.64	24.93
Y 77.0	26.89	25.85	24.19	28.15	27.13	24.72	21.32	22.90
Y 78.0	25.00	23.75	21.86	26.03	25.25	22.68	19.05	20.93
Y 79.0	23.13	21.71	19.59	23.99	23.44	20.71	16.80	19.02
Y 80.0	21.31	19.73	17.34	22.00	21.70	18.82	14.65	17.20
Y 81.0	19.56	17.82	15.15	20.09	20.03	17.01	12.58	15.46
Y 82.0	17.84	15.99	13.03	18.27	18.45	15.32	10.62	13.81
Y 83.0	16.17	14.24	10.98	16.54	16.95	13.74	8.77	12.26
Y 84.0	14.59	12.57	9.04	14.93	15.56	12.28	7.13	10.81
Y 85.0	13.11	11.02	7.25	13.45	14.25	10.95	5.60	9.47
Y 86.0	11.72	9.59	5.64	12.07	13.07	9.73	4.31	8.26
Y 87.0	10.43	8.26	4.22	10.80	11.99	8.68	3.27	7.19
Y 88.0	9.26	7.08	3.06	9.70	11.01	7.80	2.50	6.21
Y 89.0	8.18	6.06	2.19	8.72	10.11	7.05	2.06	5.41
Y 90.0	7.22	5.19	1.59	7.87	9.34	6.40	1.92	4.69
Y 91.0	6.36	4.47	1.32	7.16	8.61	5.83	1.87	4.10
Y 92.0	5.61	3.88	1.26	6.54	7.97	5.35	1.82	3.62
Y 93.0	4.95	3.39	1.24	5.98	7.41	4.94	1.73	3.20

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Candela Tabulation - (Cont.)

V/H	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0
Y 94.0	4.39	3.01	1.21	5.49	6.88	4.61	1.69	2.87
Y 95.0	3.89	2.69	1.21	5.10	6.44	4.14	1.64	2.60
Y 96.0	3.45	2.46	1.23	4.74	6.04	3.83	1.61	2.35
Y 97.0	3.10	2.22	1.22	4.29	5.54	3.60	1.57	2.13
Y 98.0	2.81	2.08	1.24	3.99	5.05	3.44	1.55	2.01
Y 99.0	2.56	2.01	1.24	3.80	4.70	3.30	1.53	1.93
Y 100.0	2.31	1.94	1.24	3.62	4.43	3.20	1.50	1.89
Y 101.0	2.12	1.88	1.24	3.49	4.23	3.12	1.47	1.82
Y 102.0	1.99	1.83	1.24	3.40	4.05	3.06	1.42	1.77
Y 103.0	1.92	1.79	1.24	3.31	3.92	3.01	1.38	1.73
Y 104.0	1.86	1.76	1.23	3.24	3.83	2.95	1.34	1.68
Y 105.0	1.80	1.73	1.22	3.15	3.73	2.88	1.30	1.64
Y 106.0	1.78	1.69	1.23	3.08	3.60	2.77	1.29	1.59
Y 107.0	1.73	1.64	1.21	3.00	3.50	2.67	1.27	1.53
Y 108.0	1.67	1.58	1.20	2.87	3.42	2.61	1.26	1.48
Y 109.0	1.64	1.55	1.19	2.82	3.34	2.51	1.25	1.42
Y 110.0	1.60	1.51	1.18	2.73	3.27	2.40	1.23	1.36
Y 111.0	1.57	1.45	1.17	2.61	3.21	2.32	1.22	1.32
Y 112.0	1.54	1.41	1.15	2.51	3.14	2.26	1.19	1.30
Y 113.0	1.50	1.37	1.15	2.48	3.08	2.23	1.17	1.27
Y 114.0	1.48	1.33	1.14	2.43	3.01	2.18	1.13	1.24
Y 115.0	1.44	1.32	1.13	2.39	2.94	2.12	1.11	1.19
Y 116.0	1.41	1.28	1.11	2.33	2.88	2.08	1.09	1.15
Y 117.0	1.39	1.27	1.11	2.29	2.80	2.00	1.06	1.11
Y 118.0	1.35	1.23	1.09	2.22	2.73	1.96	1.03	1.08
Y 119.0	1.31	1.21	1.09	2.17	2.65	1.88	1.01	1.04
Y 120.0	1.27	1.18	1.05	2.11	2.62	1.83	0.99	1.00
Y 121.0	1.25	1.15	1.04	2.06	2.56	1.75	0.97	0.95
Y 122.0	1.21	1.09	1.03	1.99	2.48	1.66	0.93	0.87
Y 123.0	1.18	1.06	1.02	1.93	2.42	1.58	0.89	0.82
Y 124.0	1.14	1.02	1.00	1.86	2.36	1.46	0.87	0.80
Y 125.0	1.09	1.00	0.98	1.78	2.30	1.33	0.74	0.80
Y 126.0	1.07	0.94	0.97	1.69	2.23	1.18	0.26	0.76
Y 127.0	1.04	0.88	0.95	1.59	2.15	1.00	0.00	0.70
Y 128.0	1.00	0.78	0.94	1.48	2.08	0.84	0.00	0.65
Y 129.0	0.97	0.71	0.92	1.34	2.00	0.69	0.00	0.56
Y 130.0	0.93	0.63	0.60	1.18	1.92	0.56	0.00	0.49
Y 131.0	0.89	0.57	0.16	1.01	1.84	0.48	0.00	0.41
Y 132.0	0.86	0.53	0.05	0.84	1.74	0.44	0.00	0.34
Y 133.0	0.84	0.51	0.05	0.69	1.63	0.41	0.01	0.31
Y 134.0	0.79	0.50	0.07	0.57	1.50	0.39	0.03	0.29
Y 135.0	0.76	0.49	0.06	0.50	1.35	0.38	0.02	0.28
Y 136.0	0.73	0.48	0.07	0.44	1.20	0.36	0.04	0.28
Y 137.0	0.65	0.48	0.09	0.43	1.00	0.36	0.03	0.25
Y 138.0	0.56	0.46	0.09	0.43	0.79	0.34	0.05	0.24
Y 139.0	0.45	0.45	0.10	0.41	0.58	0.32	0.06	0.24
Y 140.0	0.35	0.45	0.12	0.41	0.40	0.32	0.07	0.25

IES Indoor Report
Photometric Filename:F16A-24V-3528-144-5700K .IES

Candela Tabulation - (Cont.)

V/H	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0
Y 141.0	0.27	0.45	0.12	0.41	0.25	0.31	0.08	0.23
Y 142.0	0.20	0.43	0.13	0.39	0.16	0.31	0.08	0.22
Y 143.0	0.16	0.42	0.13	0.38	0.10	0.28	0.10	0.21
Y 144.0	0.17	0.42	0.14	0.37	0.11	0.28	0.21	0.20
Y 145.0	0.16	0.41	0.14	0.37	0.10	0.28	0.24	0.19
Y 146.0	0.17	0.39	0.16	0.35	0.11	0.27	0.25	0.21
Y 147.0	0.19	0.40	0.16	0.36	0.11	0.28	0.25	0.21
Y 148.0	0.19	0.39	0.16	0.36	0.12	0.27	0.25	0.20
Y 149.0	0.19	0.38	0.24	0.35	0.13	0.28	0.24	0.19
Y 150.0	0.20	0.38	0.25	0.35	0.13	0.26	0.25	0.19
Y 151.0	0.20	0.35	0.25	0.34	0.15	0.26	0.24	0.18
Y 152.0	0.22	0.36	0.27	0.32	0.15	0.27	0.24	0.17
Y 153.0	0.22	0.36	0.28	0.31	0.17	0.26	0.23	0.17
Y 154.0	0.23	0.35	0.29	0.31	0.17	0.26	0.22	0.18
Y 155.0	0.24	0.34	0.27	0.31	0.16	0.26	0.22	0.18
Y 156.0	0.25	0.34	0.28	0.31	0.19	0.27	0.23	0.19
Y 157.0	0.24	0.32	0.29	0.30	0.19	0.27	0.22	0.19
Y 158.0	0.28	0.31	0.29	0.29	0.20	0.27	0.25	0.21
Y 159.0	0.28	0.31	0.29	0.29	0.21	0.28	0.24	0.21
Y 160.0	0.28	0.31	0.29	0.30	0.22	0.27	0.26	0.22
Y 161.0	0.29	0.31	0.30	0.29	0.22	0.27	0.27	0.22
Y 162.0	0.28	0.29	0.29	0.30	0.23	0.28	0.27	0.23
Y 163.0	0.29	0.29	0.30	0.29	0.26	0.29	0.28	0.24
Y 164.0	0.31	0.30	0.29	0.29	0.26	0.28	0.28	0.25
Y 165.0	0.32	0.29	0.31	0.28	0.27	0.30	0.29	0.26
Y 166.0	0.30	0.29	0.31	0.30	0.28	0.29	0.30	0.27
Y 167.0	0.32	0.30	0.31	0.29	0.29	0.29	0.31	0.28
Y 168.0	0.32	0.30	0.32	0.31	0.29	0.29	0.31	0.28
Y 169.0	0.32	0.31	0.33	0.31	0.29	0.29	0.31	0.28
Y 170.0	0.34	0.31	0.33	0.32	0.29	0.30	0.32	0.29
Y 171.0	0.33	0.32	0.33	0.32	0.30	0.32	0.32	0.30
Y 172.0	0.33	0.31	0.33	0.33	0.31	0.31	0.32	0.30
Y 173.0	0.34	0.31	0.34	0.34	0.31	0.32	0.33	0.31
Y 174.0	0.34	0.32	0.34	0.33	0.31	0.34	0.33	0.30
Y 175.0	0.36	0.34	0.35	0.34	0.32	0.33	0.34	0.30
Y 176.0	0.36	0.33	0.34	0.34	0.32	0.33	0.34	0.31
Y 177.0	0.35	0.33	0.34	0.34	0.31	0.33	0.35	0.32
Y 178.0	0.36	0.34	0.35	0.36	0.31	0.33	0.36	0.32
Y 179.0	0.35	0.33	0.36	0.35	0.31	0.34	0.33	0.33
Y 180.0	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34