
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 28.42 lm/W			
MODEL	F21A-60-4000K	Imax(cd)	59.42	S/MH(C0/180)	1.27
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	1.59
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	310.84	η UP,DN(C0-180)	9.9,38.2
NOMINAL FLUX(lm)	310.843	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	9.9,42.0
LAMPS INSIDE	1	η up(%)	19.7	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	η down(%)	80.3	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

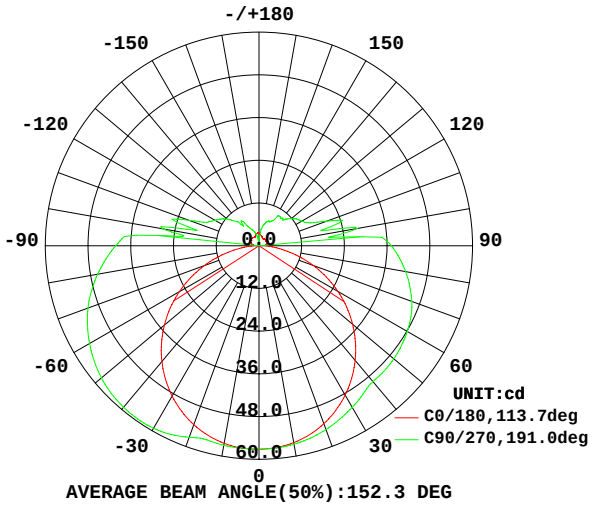

AVERAGE BEAM ANGLE(50%):152.3 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

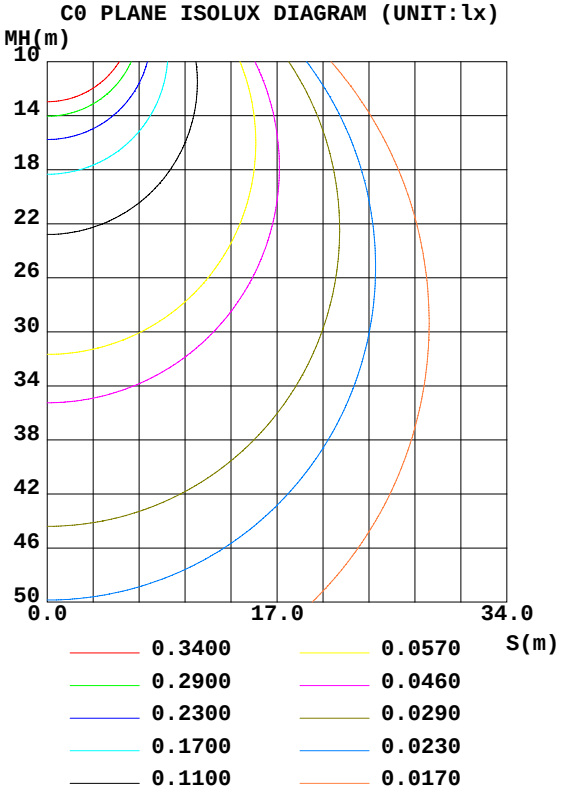

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	56.16	56.34	56.62	56.52	56.38	56.74	56.94	56.77	0- 10	5.427	5.427	1.75,1.75
20	53.22	54.06	54.97	54.41	53.51	54.88	57.25	54.87	10- 20	15.75	21.18	6.81,6.81
30	48.43	50.38	52.39	50.79	48.79	53.46	59.21	54.01	20- 30	24.71	45.89	14.8,14.8
40	42.03	45.64	49.81	46.10	42.44	51.40	59.20	52.15	30- 40	31.66	77.55	24.9,24.9
50	34.32	40.66	49.43	41.26	34.71	47.74	57.75	48.72	40- 50	35.97	113.5	36.5,36.5
60	25.58	37.37	48.10	38.03	25.85	43.15	54.95	44.41	50- 60	37.70	151.2	48.7,48.7
70	16.22	33.68	45.70	34.42	16.36	38.15	51.11	39.53	60- 70	36.76	188.0	60.5,60.5
80	7.253	29.22	41.81	29.94	7.202	32.70	46.03	34.05	70- 80	33.32	221.3	71.2,71.2
90	2.215	24.84	37.19	25.51	1.515	27.38	40.23	28.80	80- 90	28.21	249.5	80.3,80.3
100	2.215	11.81	28.08	11.46	1.789	11.68	27.60	13.49	90-100	19.59	269.1	86.6,86.6
110	2.475	10.38	20.28	10.52	2.319	10.49	21.02	12.09	100-110	13.63	282.7	91,91
120	2.731	7.697	13.92	7.924	2.892	8.157	14.37	9.373	110-120	9.682	292.4	94.1,94.1
130	2.506	6.827	11.95	7.739	2.954	6.012	11.70	6.550	120-130	6.757	299.2	96.2,96.2
140	2.412	5.533	10.21	6.822	2.885	4.412	7.780	4.745	130-140	5.006	304.2	97.9,97.9
150	2.359	5.598	8.319	4.587	2.705	3.150	6.316	4.038	140-150	3.298	307.5	98.9,98.9
160	2.631	5.629	7.278	4.123	2.999	2.254	4.487	3.107	150-160	2.040	309.5	99.6,99.6
170	3.027	4.310	5.450	3.957	3.480	1.410	2.343	1.517	160-170	1.044	310.6	99.9,99.9
180	3.414	3.422	2.123	3.492	3.720	3.414	2.098	3.475	170-180	0.2758	310.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.14	1.14	1.14	1.09	1.09	1.09	1.00	1.00	1.00	.92	.92	.92	.84	.84	.84	.80
1.0	.94	.88	.83	.90	.84	.80	.82	.77	.74	.74	.71	.68	.67	.65	.62	.59
2.0	.80	.71	.65	.76	.69	.62	.69	.63	.58	.63	.58	.53	.57	.53	.49	.46
3.0	.69	.59	.52	.66	.57	.50	.60	.53	.47	.54	.48	.43	.49	.44	.40	.37
4.0	.60	.50	.43	.57	.48	.42	.52	.45	.39	.48	.41	.36	.43	.38	.34	.31
5.0	.53	.43	.36	.51	.42	.35	.46	.39	.33	.42	.36	.31	.38	.33	.29	.26
6.0	.48	.38	.31	.46	.37	.30	.42	.34	.28	.38	.32	.27	.35	.29	.25	.22
7.0	.43	.34	.27	.41	.32	.26	.38	.30	.25	.34	.28	.23	.32	.26	.22	.19
8.0	.39	.30	.24	.37	.29	.23	.34	.27	.22	.31	.25	.21	.29	.23	.19	.17
9.0	.35	.27	.21	.34	.26	.21	.31	.24	.19	.29	.23	.18	.27	.21	.17	.15
10.0	.33	.24	.19	.31	.24	.18	.29	.22	.18	.27	.21	.17	.25	.19	.16	.14

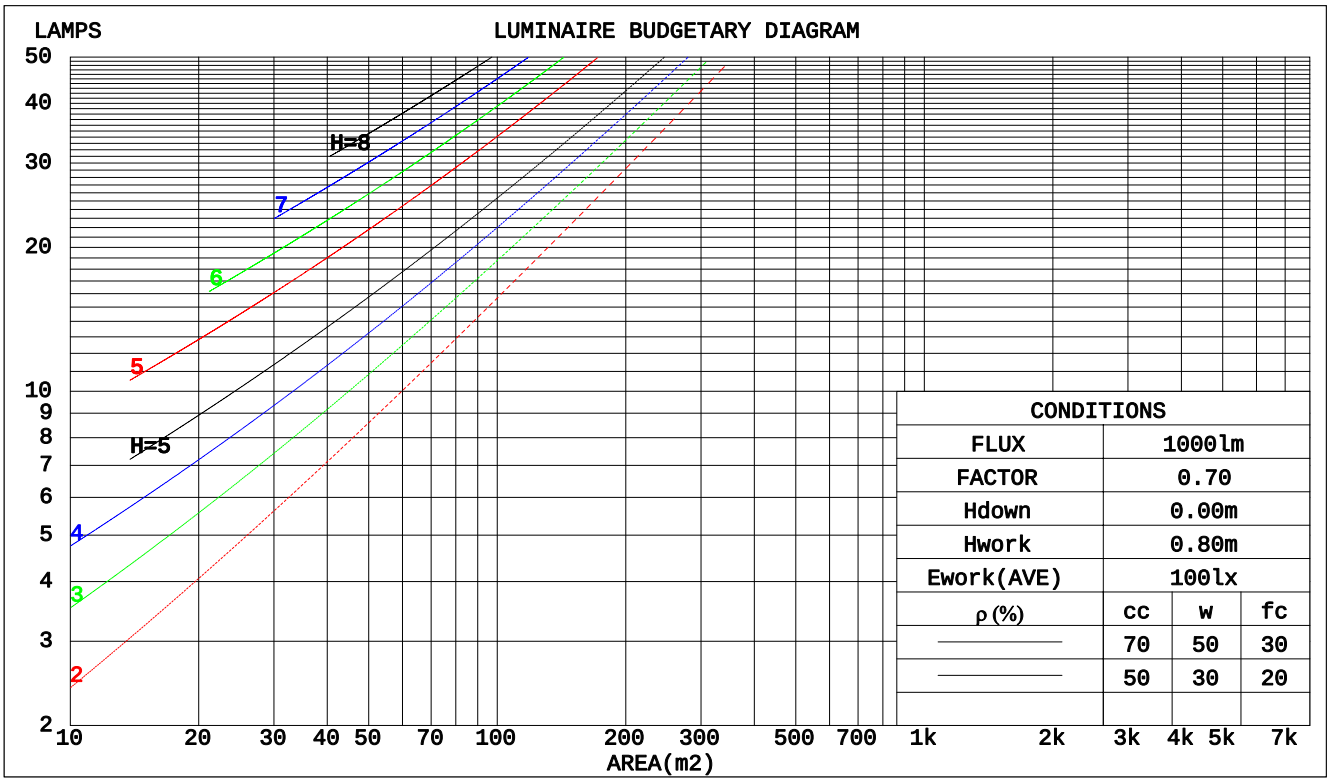

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.411	.233	.074	.397	.227	.072	.372	.214	.068	.349	.201	.065	.328	.190	.061	
2.0	.349	.191	.059	.337	.186	.057	.315	.175	.054	.294	.165	.052	.275	.155	.049	
3.0	.307	.164	.049	.296	.159	.048	.276	.150	.045	.257	.141	.043	.239	.133	.041	
4.0	.275	.143	.042	.265	.139	.041	.246	.131	.039	.229	.123	.037	.213	.116	.035	
5.0	.248	.127	.037	.240	.123	.036	.223	.116	.034	.207	.109	.032	.192	.103	.031	
6.0	.227	.114	.033	.219	.110	.032	.203	.104	.030	.189	.098	.029	.175	.092	.027	
7.0	.209	.103	.029	.201	.100	.029	.187	.095	.027	.174	.089	.026	.161	.084	.025	
8.0	.193	.094	.027	.186	.092	.026	.173	.087	.025	.161	.082	.024	.150	.077	.022	
9.0	.179	.087	.024	.173	.084	.024	.161	.080	.023	.150	.075	.022	.139	.071	.020	
10.0	.168	.080	.022	.162	.078	.022	.151	.074	.021	.140	.070	.020	.131	.066	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.341	.341	.341	.291	.291	.291	.199	.199	.199	.114	.114	.114	.037	.037	.037	
1.0	.339	.307	.278	.290	.263	.239	.198	.181	.165	.114	.105	.096	.037	.034	.031	
2.0	.332	.284	.244	.285	.245	.211	.195	.169	.147	.113	.098	.086	.036	.032	.028	
3.0	.325	.268	.222	.279	.231	.193	.191	.161	.135	.110	.094	.080	.036	.030	.026	
4.0	.317	.256	.209	.272	.221	.181	.187	.154	.128	.108	.090	.075	.035	.029	.025	
5.0	.309	.246	.199	.266	.213	.173	.183	.149	.122	.106	.087	.073	.034	.028	.024	
6.0	.302	.238	.192	.259	.206	.167	.179	.144	.118	.104	.085	.070	.034	.028	.023	
7.0	.295	.232	.187	.253	.201	.163	.175	.141	.116	.102	.083	.069	.033	.027	.023	
8.0	.288	.226	.184	.248	.196	.160	.171	.138	.114	.100	.081	.068	.032	.027	.022	
9.0	.281	.221	.181	.242	.192	.158	.168	.135	.112	.098	.080	.067	.032	.026	.022	
10.0	.275	.217	.178	.237	.188	.156	.165	.133	.110	.096	.078	.066	.031	.026	.022	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	6.6	8.0	7.1	8.5	9.1	8.8	10.2	9.3	10.7	11.3
	3H	8.3	9.6	8.9	10.2	10.8	11.9	13.2	12.5	13.8	14.4
	4H	9.1	10.3	9.6	10.9	11.5	13.6	14.8	14.2	15.4	16.1
	6H	9.6	10.8	10.2	11.4	12.1	15.5	16.7	16.1	17.3	18.0
	8H	9.8	10.9	10.4	11.6	12.3	16.5	17.7	17.2	18.3	19.0
	12H	10.0	11.1	10.6	11.7	12.4	17.7	18.8	18.4	19.4	20.2
4H	2H	7.9	9.1	8.4	9.7	10.3	9.4	10.7	10.0	11.2	11.9
	3H	9.9	11.0	10.5	11.6	12.3	12.7	13.8	13.3	14.4	15.1
	4H	10.9	11.9	11.5	12.5	13.3	14.6	15.6	15.2	16.2	17.0
	6H	11.7	12.6	12.4	13.3	14.1	16.7	17.6	17.4	18.2	19.0
	8H	12.0	12.9	12.7	13.6	14.4	17.9	18.7	18.5	19.4	20.2
	12H	12.3	13.1	13.0	13.8	14.6	19.2	20.0	19.9	20.7	21.5
8H	4H	12.1	13.0	12.8	13.7	14.5	15.0	15.8	15.7	16.5	17.3
	6H	13.4	14.1	14.1	14.8	15.7	17.3	18.1	18.1	18.8	19.6
	8H	14.0	14.6	14.7	15.3	16.2	18.7	19.4	19.4	20.1	20.9
	12H	14.5	15.1	15.2	15.8	16.7	20.3	20.9	21.1	21.6	22.5
12H	4H	12.5	13.3	13.2	14.0	14.8	15.0	15.8	15.7	16.5	17.3
	6H	14.1	14.7	14.8	15.4	16.3	17.5	18.1	18.2	18.9	19.7
	8H	14.8	15.4	15.6	16.2	17.0	19.0	19.5	19.7	20.3	21.2

Variations with the observer position at spacings:		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.1
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.2
2.0H	+ 0.3 / - 0.4	+ 0.2 / - 0.3

CIE Pub.117 Corrected 310.8 lm Total Lamp Luminous Flux.(8log(F/F0) = -4.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	46	33	26	44	33	25	42	32	25	18
0.80	55	41	33	53	40	33	50	39	32	24
1.00	62	49	40	60	48	40	56	48	38	29
1.25	69	56	47	67	55	46	62	52	44	34
1.50	74	62	52	71	60	51	66	57	49	38
2.00	82	70	61	79	68	60	73	64	57	45
2.50	86	76	67	83	73	65	76	68	62	48
3.00	90	80	72	86	78	70	79	72	66	52
4.00	95	87	80	91	83	77	84	77	72	57
5.00	98	91	85	94	87	82	86	81	76	60
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

Conical surface Flux(90deg):
95.167 lm
%lum = 30.6%
%lamp = 30.6%

Conical surface Flux(120deg):
151.23 lm
%lum = 48.7%
%lamp = 48.7%

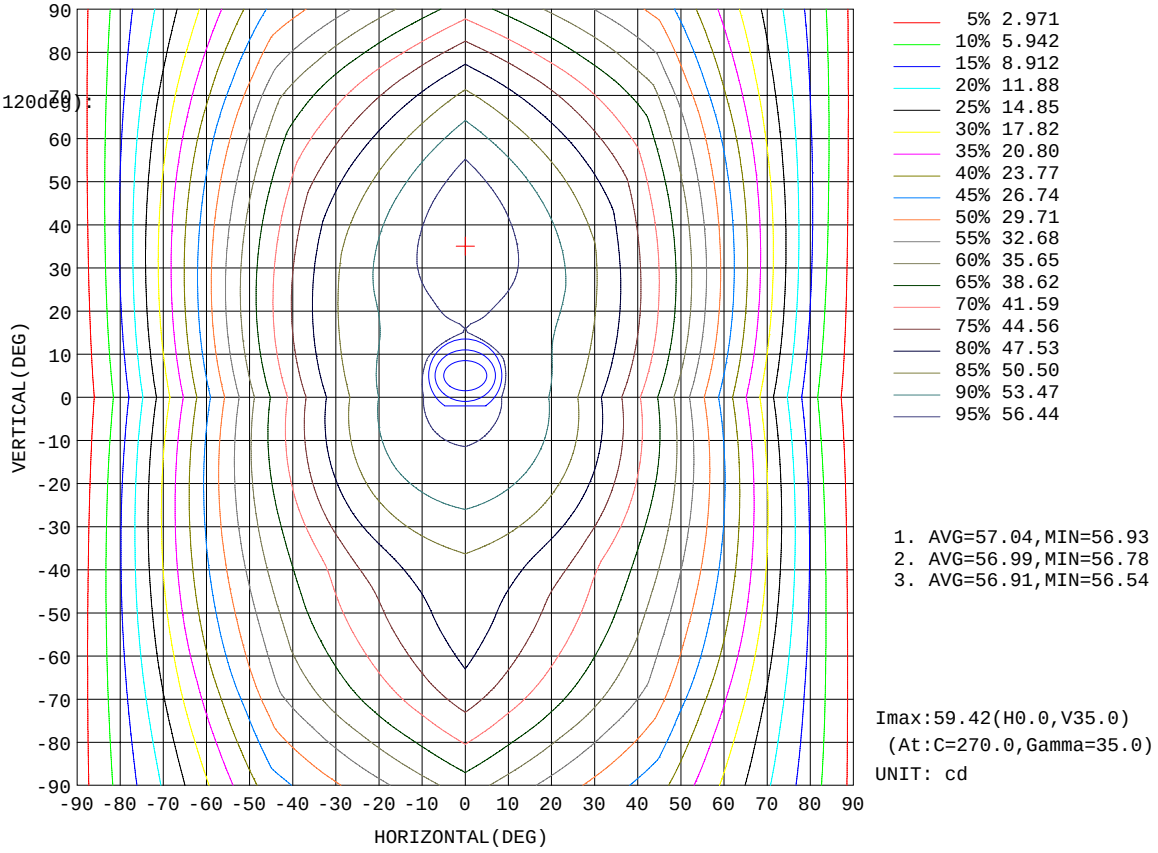


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

Flux out:139.9 lm

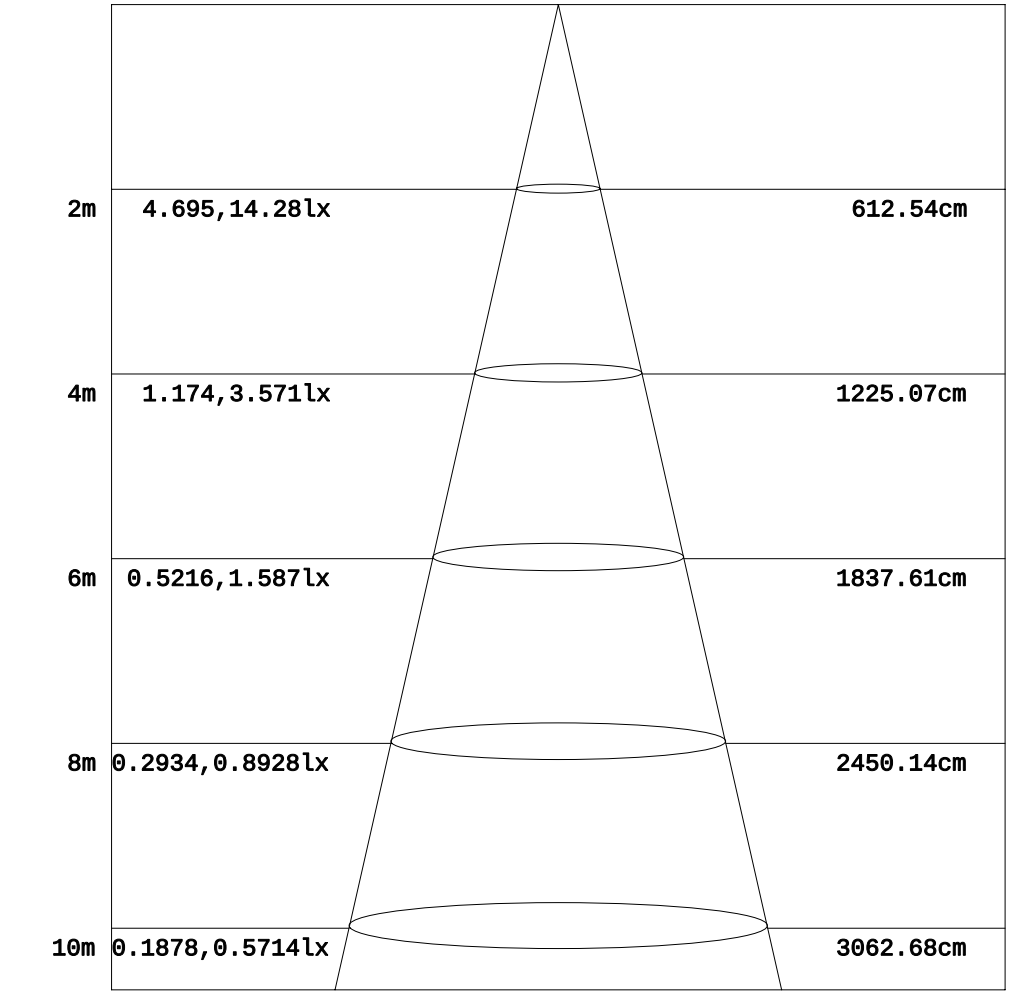


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

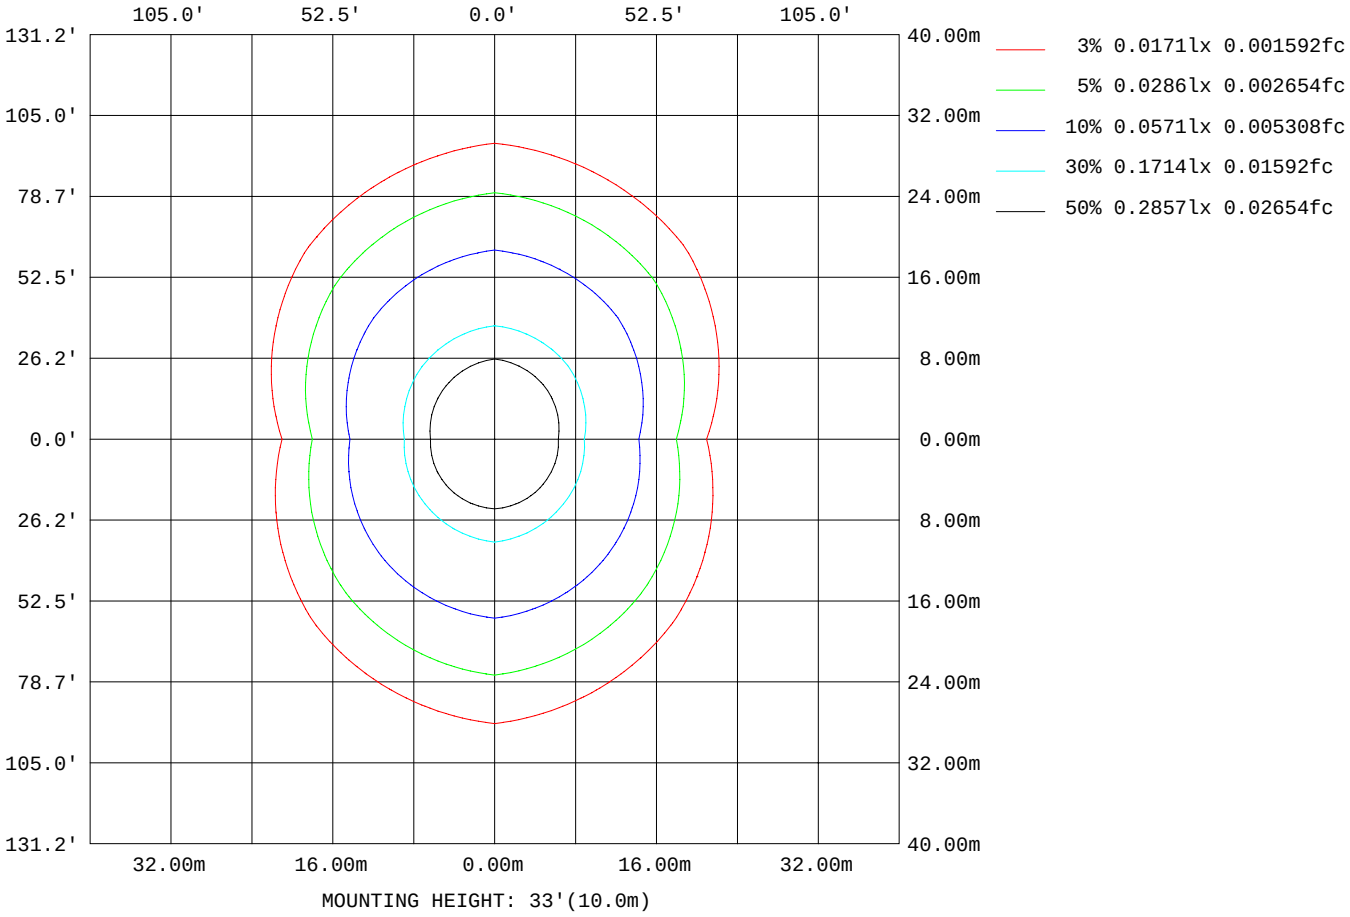

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	249
L_0~180(75)av	224
L_0~180(85)av	213
L_90~270(65)av	593
L_90~270(75)av	893
L_90~270(85)av	2374
L_45(65)av	457
L_45(75)av	660
L_45(85)av	1666

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

Planar Illuminance Curve

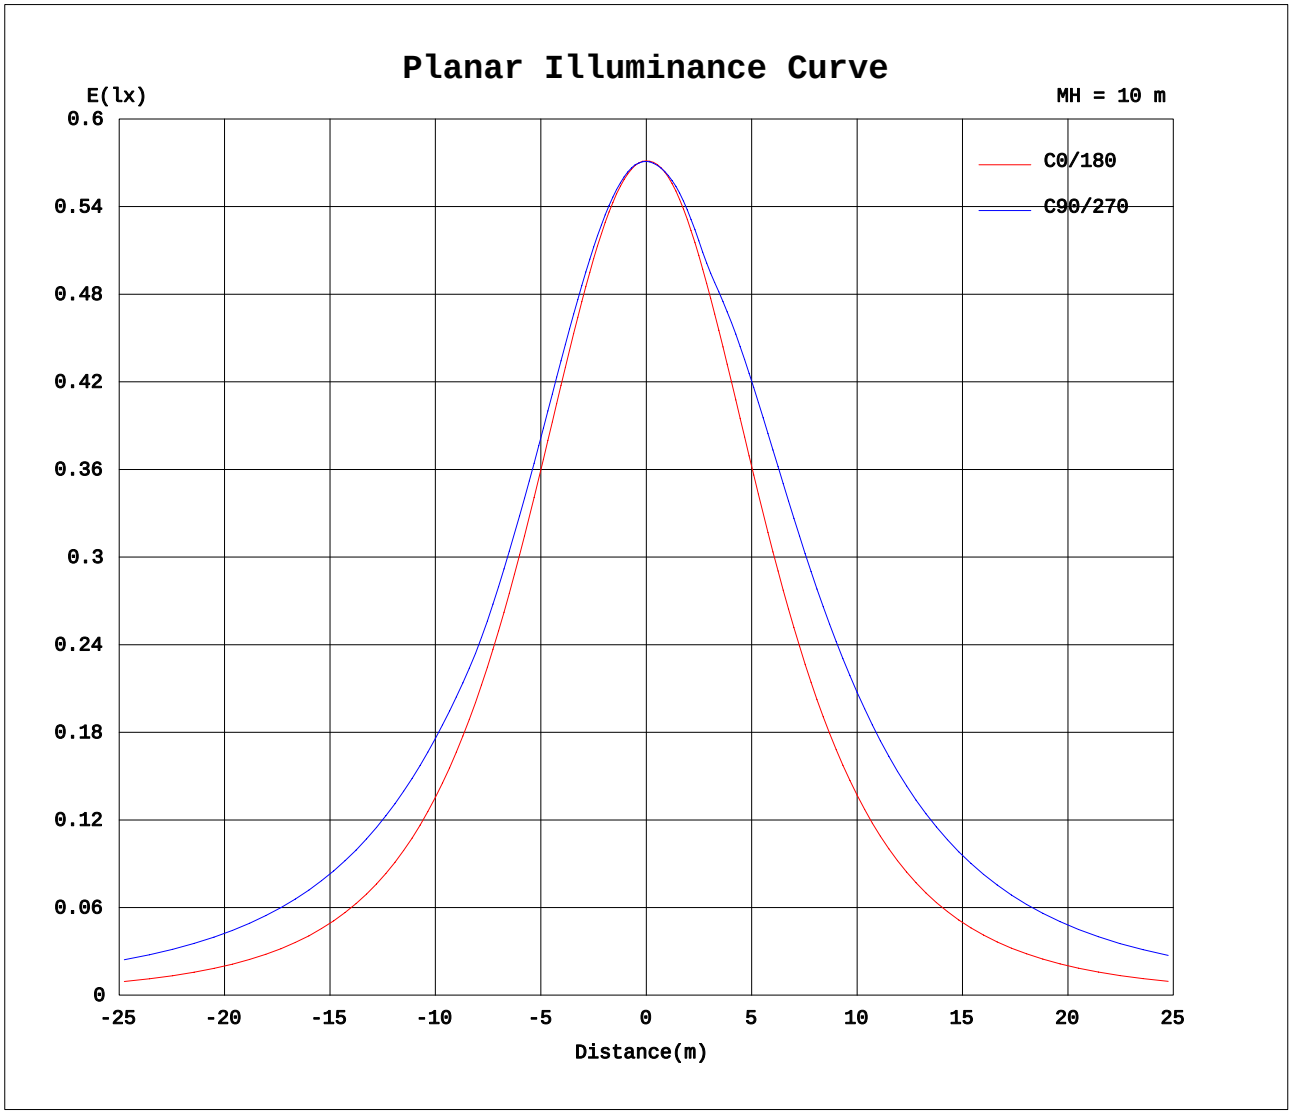

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4557A P:10.94W PF:1.000 Lamp Flux:310.843x1 lm		
NAME: F21A-60-4000K	TYPE:F21A-60-4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	PROTECTION ANGLE:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1
5	56.9	56.9	57.0	57.0	57.0	57.0	57.1	57.1
10	56.2	56.3	56.6	56.5	56.4	56.7	56.9	56.8
15	54.9	55.4	55.9	55.7	55.2	56.0	56.5	56.0
20	53.2	54.1	55.0	54.4	53.5	54.9	57.3	54.9
25	51.0	52.4	53.8	52.8	51.4	53.9	58.5	54.3
30	48.4	50.4	52.4	50.8	48.8	53.5	59.2	54.0
35	45.4	48.1	50.9	48.5	45.8	52.6	59.4	53.3
40	42.0	45.6	49.8	46.1	42.4	51.4	59.2	52.1
45	38.3	43.0	49.7	43.5	38.8	49.7	58.7	50.6
50	34.3	40.7	49.4	41.3	34.7	47.7	57.8	48.7
55	30.1	39.1	48.9	39.7	30.4	45.6	56.5	46.7
60	25.6	37.4	48.1	38.0	25.9	43.2	55.0	44.4
65	20.9	35.5	47.1	36.2	21.1	40.6	53.2	42.0
70	16.2	33.7	45.7	34.4	16.4	38.1	51.1	39.5
75	11.6	31.7	43.8	32.4	11.6	35.6	48.7	37.0
80	7.25	29.2	41.8	29.9	7.20	32.7	46.0	34.0
85	3.87	27.0	39.6	27.7	3.54	30.0	43.2	31.4
90	2.21	24.8	37.2	25.5	1.52	27.4	40.2	28.8
95	1.93	14.0	29.2	14.2	1.56	13.9	34.5	16.1
100	2.22	11.8	28.1	11.5	1.79	11.7	27.6	13.5
105	2.25	12.6	21.1	13.3	2.18	12.9	20.4	14.5
110	2.47	10.4	20.3	10.5	2.32	10.5	21.0	12.1
115	2.82	9.98	15.3	10.3	2.82	9.82	15.8	10.8
120	2.73	7.70	13.9	7.92	2.89	8.16	14.4	9.37
125	2.37	6.73	13.1	7.35	2.73	6.68	13.1	7.67
130	2.51	6.83	12.0	7.74	2.95	6.01	11.7	6.55
135	2.47	6.82	10.7	7.46	2.86	5.62	9.95	5.80
140	2.41	5.53	10.2	6.82	2.88	4.41	7.78	4.75
145	2.40	5.68	10.2	5.28	2.84	3.64	8.45	4.41
150	2.36	5.60	8.32	4.59	2.71	3.15	6.32	4.04
155	2.24	6.19	7.45	4.60	2.72	2.97	5.14	3.74
160	2.63	5.63	7.28	4.12	3.00	2.25	4.49	3.11
165	2.90	5.02	6.43	3.84	3.28	1.81	3.53	2.37
170	3.03	4.31	5.45	3.96	3.48	1.41	2.34	1.52
175	3.17	4.05	2.45	4.07	3.66	1.35	0.78	1.39
180	3.41	3.42	2.12	3.49	3.72	3.41	2.10	3.48

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-12-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.340m [K=1.0000]
Remarks: