

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	5334.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	42.6V x 40.1H
	At 50% of Imax	19.8V x 18.4H
	At 90% of Imax	5.2V x 7.0H

Beam Flux	Total	999.6 lumens per klm.
	To 10% of Imax	696.4 lumens per klm.
	To 50% of Imax	297.6 lumens per klm.
	To 90% of Imax	28.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.6V I:0.2452A P:33.60W PF:0.6186 Lamp Flux:2106.91x1 lm		
NAME: 8.01.020.0003 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

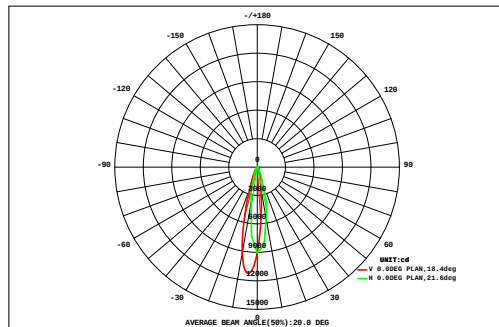

DATA OF LAMP		Eff:62.70lm/W	
MODEL LWW-OP-D80-L12-RDM	Imax(cd)	11240	
NOMINAL POWER(W)	34	AVAILABILITY(%)	71.4
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	1503
NOMINAL FLUX(lm)	2106.91	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2107
TEST VOLTAGE(V)	221.6	θ @50%(H,V)	18,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.67	0.85	1.05	1.28	1.52	1.74	1.90	1.97	1.93	1.79	1.60	1.35	1.12	0.91	0.73	0.59	0.48	0.40	21.9	0.00	
	24	0.78	1.04	1.38	1.80	2.28	2.77	3.22	3.46	3.48	3.25	2.85	2.39	1.92	1.51	1.16	0.89	0.68	0.53	35.4	12.5	
	21	1.07	1.44	1.93	2.51	3.14	3.76	4.22	4.38	4.23	3.79	3.22	2.62	2.05	1.57	1.19	0.89	0.67	0.52	43.2	25.2	
	18	1.39	1.88	2.52	3.27	4.05	4.79	5.24	5.30	4.95	4.29	3.56	2.79	2.14	1.61	1.19	0.87	0.65	0.50	51.0	35.8	
	15	1.28	1.86	2.71	4.00	6.07	8.72	11.4	13.0	13.1	11.6	9.03	6.43	4.45	3.14	2.23	1.57	1.11	0.78	103	91.1	
	12	1.59	2.36	3.54	5.44	8.42	12.1	15.4	17.2	16.8	14.3	10.7	7.44	5.07	3.54	2.47	1.72	1.20	0.83	130	120	
	9	2.38	3.53	5.39	8.47	12.9	17.6	21.0	21.6	19.3	15.0	10.2	6.71	4.51	3.12	2.13	1.46	1.00	0.69	157	149	
		2.03	3.03	4.58	7.31	11.8	17.2	22.2	24.9	24.2	20.3	14.7	9.78	6.27	4.15	2.81	1.91	1.31	0.89	179	171	
		1.57	2.39	3.53	5.77	10.1	16.3	23.1	28.1	29.2	25.9	19.6	13.2	8.22	5.29	3.57	2.42	1.65	1.11	201	192	
		2.74	4.10	6.65	11.6	18.6	26.1	31.5	32.7	28.8	21.5	14.3	8.75	5.45	3.60	2.44	1.66	1.12	0.76	222	215	
		2.60	3.89	6.26	10.9	17.3	24.4	29.5	30.7	27.2	20.5	13.7	8.55	5.39	3.59	2.44	1.66	1.13	0.78	210	203	
		1.22	1.79	2.40	3.28	5.34	8.61	12.7	16.2	17.8	16.6	13.2	9.49	6.32	4.25	2.95	2.04	1.42	0.98	127	115	
		1.45	2.08	2.81	3.77	5.36	7.43	9.57	11.0	11.2	10.1	8.05	6.00	4.28	3.03	2.15	1.52	1.08	0.76	91.6	79.4	
		1.78	2.50	3.46	4.68	5.96	6.85	6.85	5.87	4.24	2.90	2.28	2.06	1.96	1.64	1.23	0.91	0.68	0.50	56.3	40.6	
		0.86	1.19	1.63	2.17	2.94	3.99	5.15	6.08	6.45	6.03	5.11	4.03	3.07	2.33	1.74	1.28	0.94	0.70	55.7	39.9	
		0.65	0.85	1.09	1.31	1.57	2.02	2.68	3.38	3.94	4.00	3.64	3.03	2.40	1.87	1.44	1.09	0.82	0.63	36.4	15.3	
		0.82	1.02	1.25	1.45	1.52	1.41	1.15	0.88	0.80	0.79	0.87	0.93	0.89	0.77	0.65	0.54	0.45	0.38	16.6	0.00	
	0.61	0.75	0.91	1.06	1.14	1.13	1.14	1.23	1.27	1.24	1.15	1.04	0.96	0.83	0.70	0.59	0.49	0.41	16.6	0.00		
-27		-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)						6	9	12	15	18	21	24	27
Φ t	25.5	36.6	53.1	80.1	120	167	208	228	219	184	138	96.5	66.5	46.8	33.2	23.6	16.9	12.2	1754	---		
Φ a	3.81	13.4	36.6	67.0	109	157	201	223	213	177	130	83.5	51.8	29.1	7.90	0.00	0.00	0.00	---		1503	

one-half-peak spread: U:7.8,D:12.2 , L:9.3,R:9.2


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.6V I:0.2452A P:33.60W PF:0.6186 Lamp Flux:2106.91x1 lm		
NAME: 8.01.020.0003 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

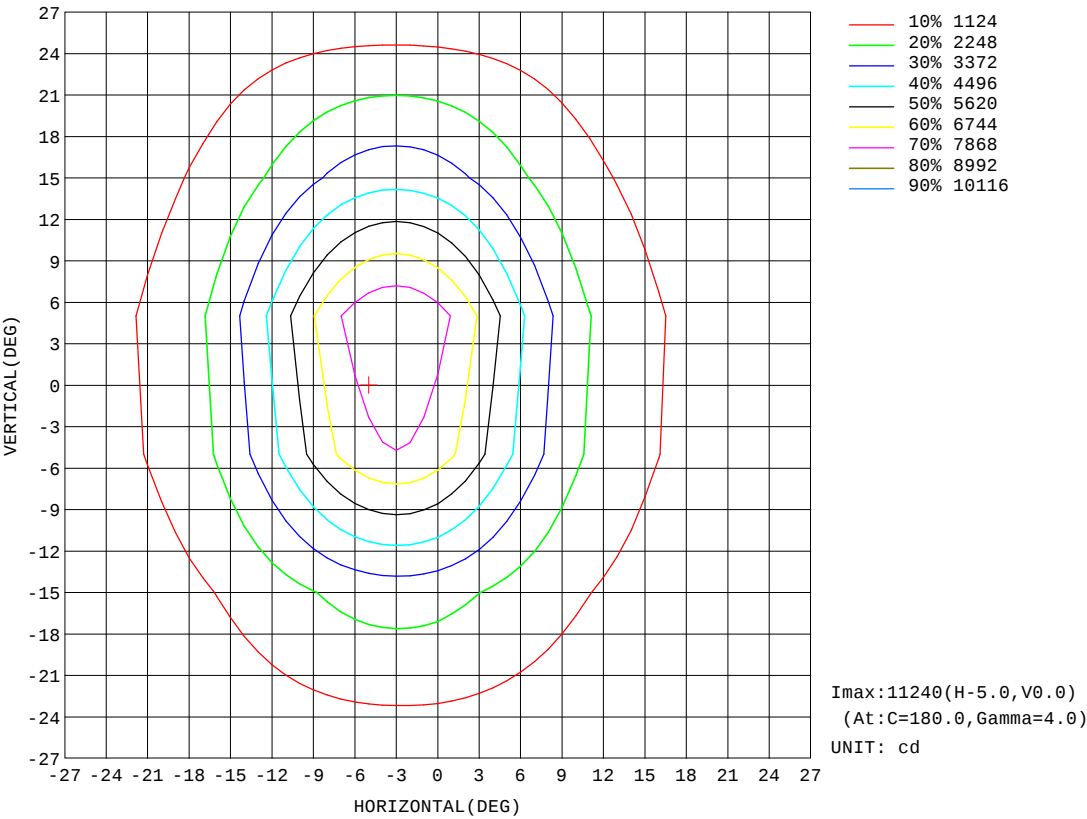


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.6V I:0.2452A P:33.60W PF:0.6186 Lamp Flux:2106.91x1 lm		
NAME: 8.01.020.0003 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

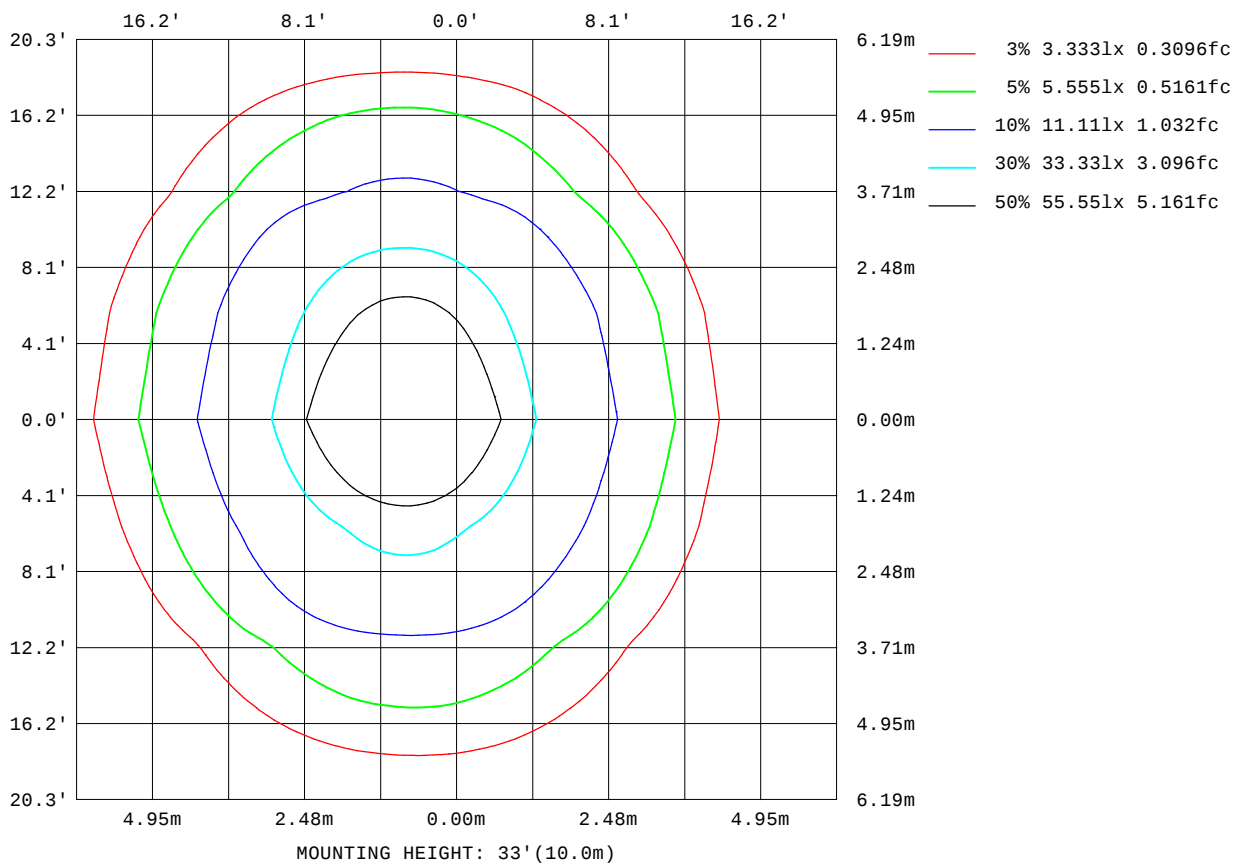


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.6V I:0.2452A P:33.60W PF:0.6186 Lamp Flux:2106.91x1 lm		
NAME: 8.01.020.0003 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

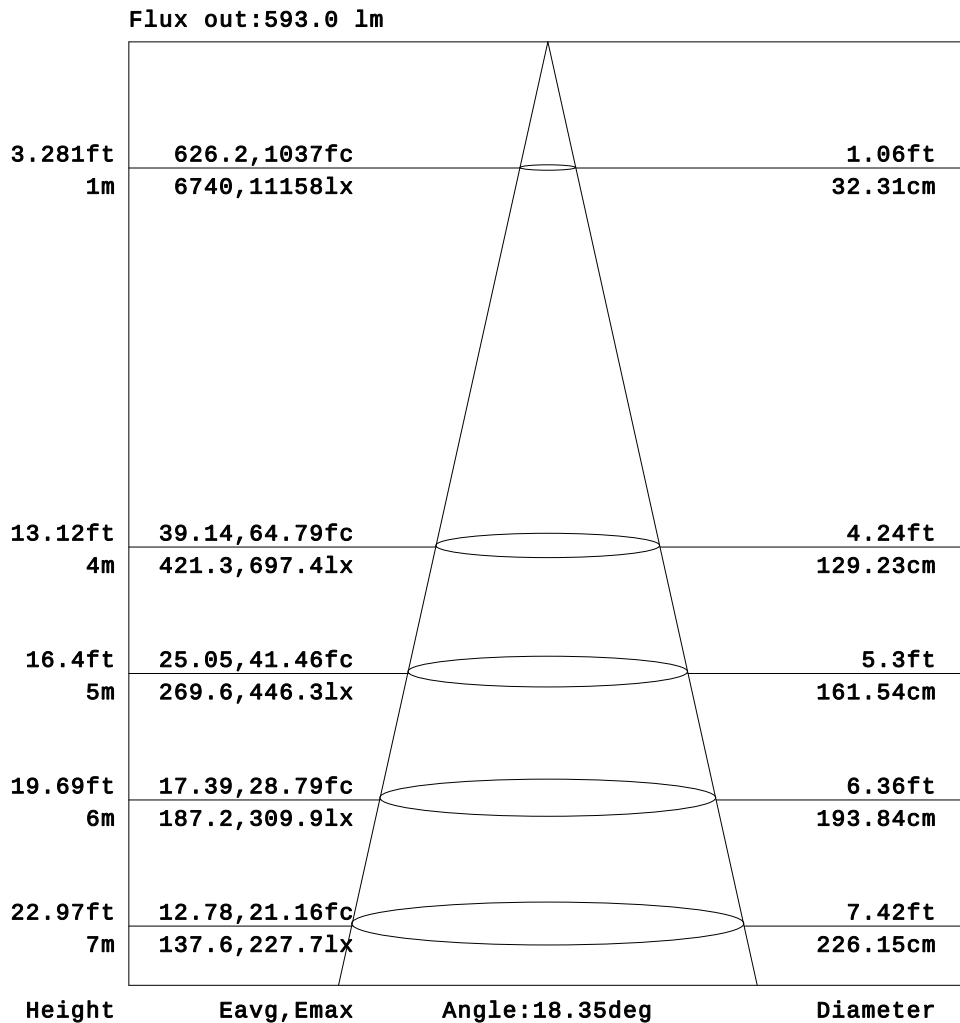


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

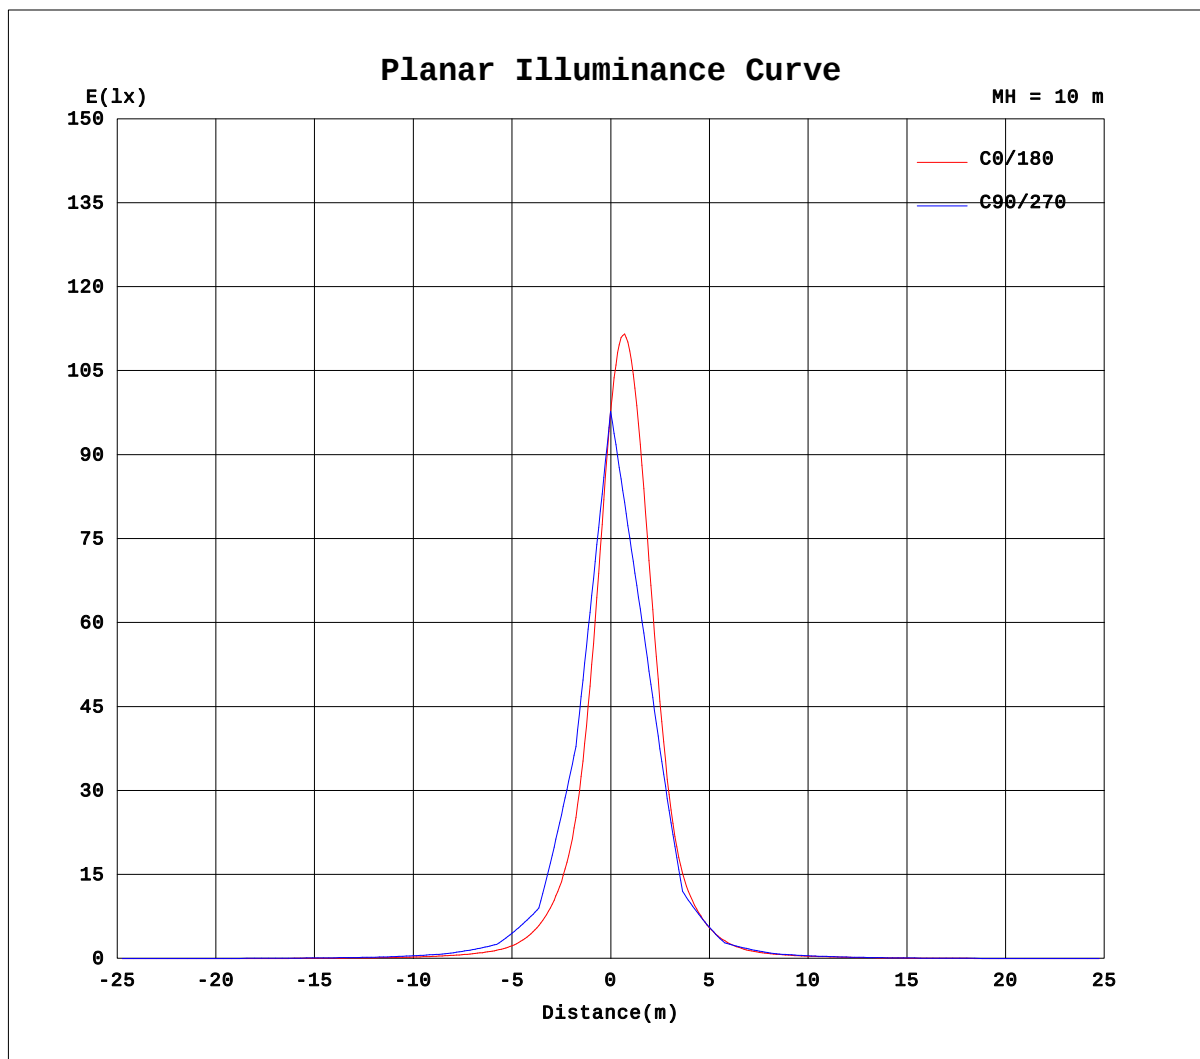

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-09

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.6V I:0.2452A P:33.60W PF:0.6186 Lamp Flux:2106.91x1 lm		
NAME: 8.01.020.0003 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.56	0.88	0.93	1.05	1.14	1.09	1.13	1.19	1.14	1.09	1.11
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.73	1.43	1.77	1.92	2.20	2.23	2.19	2.33	2.36	2.22	2.21	2.20
-65	0.00	0.00	0.00	0.00	0.00	0.18	0.46	1.08	1.82	2.54	2.87	3.22	3.52	3.59	3.77	4.00	4.00	4.00	4.03
-60	0.00	0.00	0.00	0.00	0.08	0.60	1.24	1.94	2.89	3.58	4.03	4.53	4.88	5.10	5.42	5.68	5.74	5.82	5.78
-55	0.00	0.00	0.00	0.00	0.09	0.72	1.40	2.23	3.20	4.05	4.72	5.38	6.11	6.60	7.10	7.60	7.88	8.09	8.16
-50	0.00	0.00	0.00	0.00	0.52	1.38	2.25	3.23	4.29	5.03	5.89	6.90	7.77	8.49	9.19	9.79	10.2	10.4	10.3
-45	0.00	0.00	0.00	0.00	0.47	1.40	2.33	3.42	4.45	5.46	6.35	7.62	9.01	10.2	11.7	13.0	14.2	15.0	15.0
-40	0.00	0.00	0.00	0.17	1.12	2.20	3.35	4.36	5.39	6.55	7.88	9.51	11.2	13.1	15.3	17.2	19.0	19.7	19.3
-35	0.00	0.00	0.00	0.14	1.10	2.32	3.38	4.47	5.53	6.91	8.39	10.4	12.7	15.3	18.8	22.9	26.8	29.5	29.7
-30	0.00	0.00	0.00	0.74	1.92	3.39	4.32	5.39	6.43	8.40	10.6	13.1	16.0	20.0	25.5	31.8	37.3	40.0	39.1
-25	0.00	0.00	0.00	0.75	1.94	3.19	4.24	5.38	6.76	8.64	11.0	13.9	18.0	25.0	35.8	49.8	64.6	74.8	75.3
-20	0.00	0.00	0.22	1.86	2.89	3.82	4.81	6.45	8.25	10.6	13.5	17.5	24.8	37.8	56.8	80.1	102	112	106
-15	0.00	0.00	0.22	1.41	2.62	3.65	4.77	6.16	8.00	10.5	13.6	18.3	27.2	45.0	76.0	126	205	270	265
-10	0.00	0.00	0.92	2.03	3.01	4.30	5.55	7.21	9.59	12.6	16.9	24.7	41.5	73.7	129	230	370	444	374
-5	0.00	0.00	0.50	1.75	2.87	3.94	5.12	6.63	8.81	11.7	15.7	22.6	38.2	70.8	131	272	534	758	729
0	0.00	0.00	1.15	2.34	3.36	4.50	5.79	7.62	10.2	13.7	18.9	29.8	56.2	108	214	504	915	1124	905
5	0.00	0.00	0.55	1.80	2.85	3.91	5.09	6.61	8.83	11.8	15.8	23.2	39.9	75.1	142	302	606	865	829
10	0.00	0.00	1.02	2.14	3.17	4.25	5.50	7.19	9.62	12.8	17.5	26.5	46.6	86.0	162	322	550	662	550
15	0.00	0.00	0.50	1.62	2.64	3.66	4.79	6.18	8.11	10.7	14.1	19.5	30.5	52.9	92.7	168	294	398	384
20	0.00	0.00	0.88	1.91	2.92	3.95	5.11	6.57	8.54	11.1	14.3	19.3	29.0	46.7	72.8	107	141	155	140
25	0.00	0.00	0.35	1.36	2.32	3.29	4.34	5.51	7.01	8.97	11.4	14.6	19.8	29.3	43.8	63.6	84.7	99.0	96.9
30	0.00	0.00	0.65	1.57	2.50	3.44	4.46	5.57	6.93	8.70	10.8	13.4	17.0	22.3	29.4	37.0	43.1	45.3	42.6
35	0.00	0.00	0.13	1.04	1.93	2.82	3.72	4.67	5.78	7.09	8.68	10.6	13.0	16.2	20.5	25.4	29.8	32.3	32.0
40	0.00	0.00	0.37	1.22	2.09	2.89	3.72	4.61	5.60	6.69	7.98	9.59	11.3	13.3	15.4	17.7	19.4	19.9	19.2
45	0.00	0.00	0.01	0.68	1.50	2.29	2.98	3.75	4.60	5.50	6.45	7.61	8.90	10.3	11.9	13.4	14.8	15.5	15.3
50	0.00	0.00	0.00	0.78	1.59	2.23	2.84	3.57	4.30	5.06	5.80	6.65	7.56	8.57	9.58	10.4	11.0	11.2	10.8
55	0.00	0.00	0.00	0.26	0.98	1.61	2.11	2.79	3.47	4.10	4.69	5.35	6.00	6.65	7.38	8.00	8.41	8.68	8.59
60	0.00	0.00	0.00	0.30	0.93	1.38	1.89	2.59	3.14	3.61	4.10	4.59	4.94	5.30	5.75	5.97	6.15	6.21	6.03
65	0.00	0.00	0.00	0.02	0.34	0.77	1.16	1.75	2.31	2.62	2.96	3.35	3.57	3.77	4.08	4.30	4.38	4.48	4.44
70	0.00	0.00	0.00	0.00	0.12	0.43	0.84	1.44	1.77	1.89	2.15	2.33	2.34	2.46	2.65	2.69	2.70	2.77	2.64
75	0.00	0.00	0.00	0.00	0.00	0.16	0.33	0.59	0.86	0.93	1.06	1.24	1.24	1.24	1.34	1.38	1.35	1.38	1.37
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.05	0.15	0.20	0.12	0.09	0.10	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-08-09

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.6V I:0.2452A P:33.60W PF:0.6186 Lamp Flux:2106.91x1 lm		
NAME: 8.01.020.0003 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.03	0.87	0.83	0.76	0.56	0.48	0.41	0.25	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	1.92	1.67	1.63	1.36	1.05	0.94	0.75	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	3.81	3.43	3.23	2.90	2.43	2.18	1.90	1.44	1.01	0.80	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	5.38	4.99	4.63	4.05	3.58	3.25	2.74	2.17	1.87	1.33	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	7.76	7.17	6.60	5.86	5.15	4.59	3.97	3.29	2.76	2.20	1.37	0.54	0.10	0.00	0.00	0.00	0.00	0.00
-50	9.67	8.89	8.01	7.08	6.24	5.47	4.64	3.97	3.29	2.43	1.65	0.73	0.00	0.00	0.00	0.00	0.00	0.00
-45	14.3	12.9	11.4	9.84	8.43	7.19	6.00	4.98	4.16	3.25	2.39	1.59	0.68	0.00	0.00	0.00	0.00	0.00
-40	18.0	15.7	13.6	11.4	9.59	7.95	6.48	5.35	4.33	3.33	2.49	1.82	0.70	0.00	0.00	0.00	0.00	0.00
-35	27.8	23.8	19.7	15.9	12.9	10.4	8.24	6.57	5.31	4.21	3.27	2.47	1.53	0.32	0.00	0.00	0.00	0.00
-30	34.8	28.6	22.6	17.8	14.1	11.0	8.53	6.72	5.37	4.32	3.38	2.51	1.43	0.05	0.00	0.00	0.00	0.00
-25	66.0	51.9	38.1	27.1	19.4	14.5	11.0	8.43	6.52	5.14	4.03	3.03	2.03	0.84	0.00	0.00	0.00	0.00
-20	86.7	63.8	43.9	29.4	20.2	14.9	11.3	8.45	6.46	5.04	3.86	2.79	1.73	0.59	0.00	0.00	0.00	0.00
-15	195	125	78.1	47.7	29.5	19.3	14.0	10.4	7.74	5.92	4.57	3.43	2.36	1.23	0.06	0.00	0.00	0.00
-10	242	143	84.4	48.9	28.5	18.7	13.5	10.0	7.38	5.65	4.34	3.21	2.12	0.94	0.00	0.00	0.00	0.00
-5	472	243	128	70.8	39.6	23.6	16.3	11.8	8.59	6.43	4.95	3.75	2.65	1.47	0.13	0.00	0.00	0.00
0	495	227	118	63.4	34.3	21.4	14.9	10.8	7.84	5.92	4.58	3.40	2.30	1.06	0.00	0.00	0.00	0.00
5	531	264	135	73.6	40.4	23.9	16.5	11.9	8.65	6.44	4.95	3.75	2.67	1.50	0.13	0.00	0.00	0.00
10	322	169	94.2	52.7	29.6	19.2	13.9	10.2	7.45	5.66	4.36	3.23	2.18	0.97	0.00	0.00	0.00	0.00
15	266	151	88.0	51.4	30.4	19.6	14.1	10.5	7.77	5.90	4.54	3.42	2.37	1.26	0.05	0.00	0.00	0.00
20	107	73.3	47.6	30.5	20.4	14.9	11.2	8.43	6.41	4.98	3.81	2.77	1.74	0.60	0.00	0.00	0.00	0.00
25	80.0	58.9	40.8	27.8	19.4	14.4	11.1	8.46	6.50	5.09	3.95	2.95	1.96	0.87	0.00	0.00	0.00	0.00
30	37.0	29.1	22.4	17.4	13.8	11.0	8.65	6.78	5.35	4.27	3.27	2.35	1.31	0.21	0.00	0.00	0.00	0.00
35	28.8	24.1	19.4	15.6	12.6	10.2	8.17	6.53	5.21	4.14	3.22	2.41	1.49	0.39	0.00	0.00	0.00	0.00
40	17.4	15.2	13.1	11.2	9.33	7.64	6.29	5.15	4.15	3.26	2.51	1.80	0.80	0.00	0.00	0.00	0.00	0.00
45	14.2	12.8	11.3	9.77	8.36	7.01	5.83	4.85	3.95	3.08	2.31	1.64	0.83	0.05	0.00	0.00	0.00	0.00
50	10.0	9.21	8.21	7.23	6.30	5.37	4.54	3.83	3.04	2.24	1.55	0.91	0.05	0.00	0.00	0.00	0.00	0.00
55	8.08	7.50	6.86	6.09	5.39	4.71	3.95	3.27	2.67	2.04	1.28	0.61	0.22	0.00	0.00	0.00	0.00	0.00
60	5.67	5.33	4.89	4.38	3.95	3.44	2.78	2.24	1.85	1.22	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	4.14	3.83	3.59	3.18	2.79	2.49	2.06	1.55	1.13	0.76	0.37	0.02	0.00	0.00	0.00	0.00	0.00	0.00
70	2.33	2.16	2.00	1.64	1.39	1.26	0.93	0.52	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.23	1.10	1.04	0.90	0.73	0.66	0.54	0.34	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: