

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5194.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	44.9V x 39.7H
	At 50% of Imax	21.2V x 18.0H
	At 90% of Imax	6.3V x 6.8H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	710.5 lumens per klm.
	To 50% of Imax	337.5 lumens per klm.
	To 90% of Imax	40.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:1.557A P:37.36W PF:1.000 Lamp Flux:2022.02x1 lm		
NAME: 8.01.020.0009 20° LW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

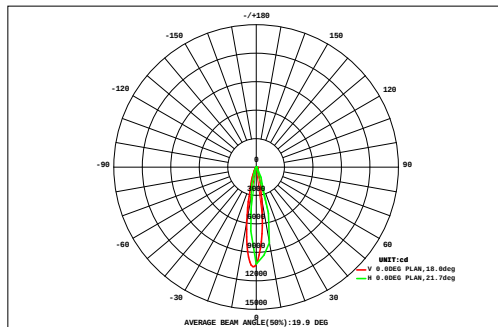

DATA OF LAMP		Eff:54.13lm/W	
MODEL LW-OP-D80-L12-RDM	Imax(cd)	10503	
NOMINAL POWER(W)	37	AVAILABILITY(%)	72.2
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	1461
NOMINAL FLUX(lm)	2022.02	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2022
TEST VOLTAGE(V)	24	θ @50%(H,V)	18,21DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
	27	0.72	0.93	1.18	1.47	1.76	2.03	2.27	2.41	2.43	2.31	2.07	1.77	1.46	1.16	0.92	0.72	0.58	0.47	26.7	5.53
	24	0.86	1.17	1.57	2.04	2.58	3.14	3.70	4.14	4.33	4.16	3.68	3.07	2.46	1.91	1.44	1.07	0.80	0.60	42.7	26.0
	21	1.08	1.50	2.02	2.64	3.33	4.07	4.77	5.29	5.43	5.09	4.41	3.59	2.83	2.17	1.60	1.16	0.85	0.63	52.4	38.3
	18	1.32	1.85	2.49	3.26	4.11	5.02	5.86	6.45	6.52	6.01	5.10	4.09	3.18	2.39	1.73	1.24	0.89	0.65	62.2	49.6
	15	1.26	1.81	2.59	3.68	5.30	7.81	11.1	14.4	16.3	16.0	13.6	10.1	6.62	4.18	2.80	1.93	1.33	0.92	122	112
	12	1.45	2.11	3.05	4.45	6.67	10.2	14.8	19.1	21.5	20.8	17.3	12.4	7.87	4.83	3.20	2.18	1.47	1.00	154	146
	9	1.85	2.71	3.93	5.82	8.93	13.8	19.9	24.8	26.9	24.9	19.6	13.3	7.95	4.79	3.18	2.14	1.42	0.95	187	179
		1.67	2.44	3.56	5.25	8.12	12.8	18.9	24.6	27.5	26.3	21.4	15.0	9.24	5.44	3.48	2.33	1.55	1.03	191	182
		1.43	2.09	3.06	4.50	7.01	11.4	17.4	23.6	27.5	27.3	23.0	16.6	10.6	6.12	3.79	2.52	1.68	1.12	191	182
		1.85	2.72	3.97	6.03	9.86	15.7	22.6	28.2	29.8	26.6	20.3	13.4	7.98	4.66	2.98	1.99	1.32	0.89	201	193
		1.74	2.55	3.71	5.60	9.07	14.4	20.5	25.4	26.8	23.9	18.2	12.1	7.25	4.31	2.79	1.87	1.24	0.84	182	174
		1.10	1.56	2.19	2.99	4.08	5.89	8.45	11.3	13.3	13.6	11.8	8.97	6.15	3.96	2.64	1.81	1.24	0.86	102	90.7
		1.09	1.51	2.07	2.70	3.38	4.27	5.38	6.53	7.27	7.21	6.32	4.99	3.73	2.71	1.92	1.35	0.96	0.69	64.1	50.3
		1.10	1.51	2.00	2.52	2.86	2.89	2.57	1.97	1.49	1.12	0.92	0.88	1.11	1.34	1.14	0.86	0.65	0.49	27.4	8.07
		0.72	0.97	1.29	1.69	2.14	2.68	3.29	3.87	4.23	4.19	3.73	3.04	2.34	1.78	1.34	1.00	0.74	0.56	39.6	22.2
		0.56	0.72	0.93	1.17	1.41	1.64	1.88	2.12	2.34	2.43	2.31	2.03	1.65	1.30	1.02	0.79	0.61	0.49	25.4	2.37
		0.53	0.65	0.78	0.91	0.99	0.98	0.84	0.64	0.52	0.47	0.48	0.56	0.60	0.56	0.49	0.43	0.38	0.34	11.2	0.00
	0.44	0.53	0.63	0.73	0.80	0.82	0.79	0.82	0.84	0.82	0.77	0.69	0.62	0.57	0.50	0.44	0.38	0.34	11.5	0.00	
-27 -24 -21 -18 -15 -12 -9 -6 HORIZONTAL(DEG) 6 9 12 15 18 21 24 27																					
Φ t	20.8	29.3	41.0	57.4	82.4	120	165	206	225	213	175	127	83.6	54.2	37.0	25.8	18.1	12.9	1693	---	
Φ a	0.00	5.65	20.9	43.4	71.3	112	158	200	220	208	170	119	71.4	39.5	19.9	0.96	0.00	0.00	---	1461	

one-half-peak spread: U:6.7,D:14.7 , L:8.8,R:9.3


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:1.557A P:37.36W PF:1.000 Lamp Flux:2022.02x1 lm		
NAME: 8.01.020.0009 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

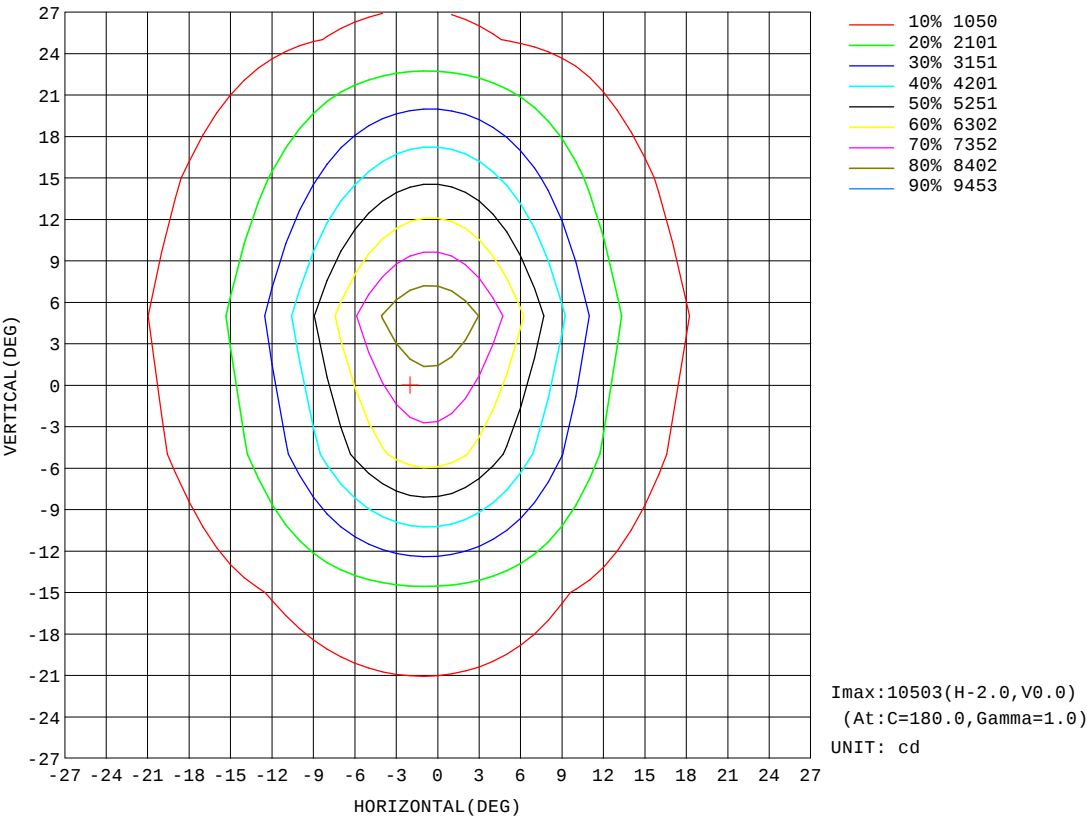


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:1.557A P:37.36W PF:1.000 Lamp Flux:2022.02x1 lm		
NAME: 8.01.020.0009 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

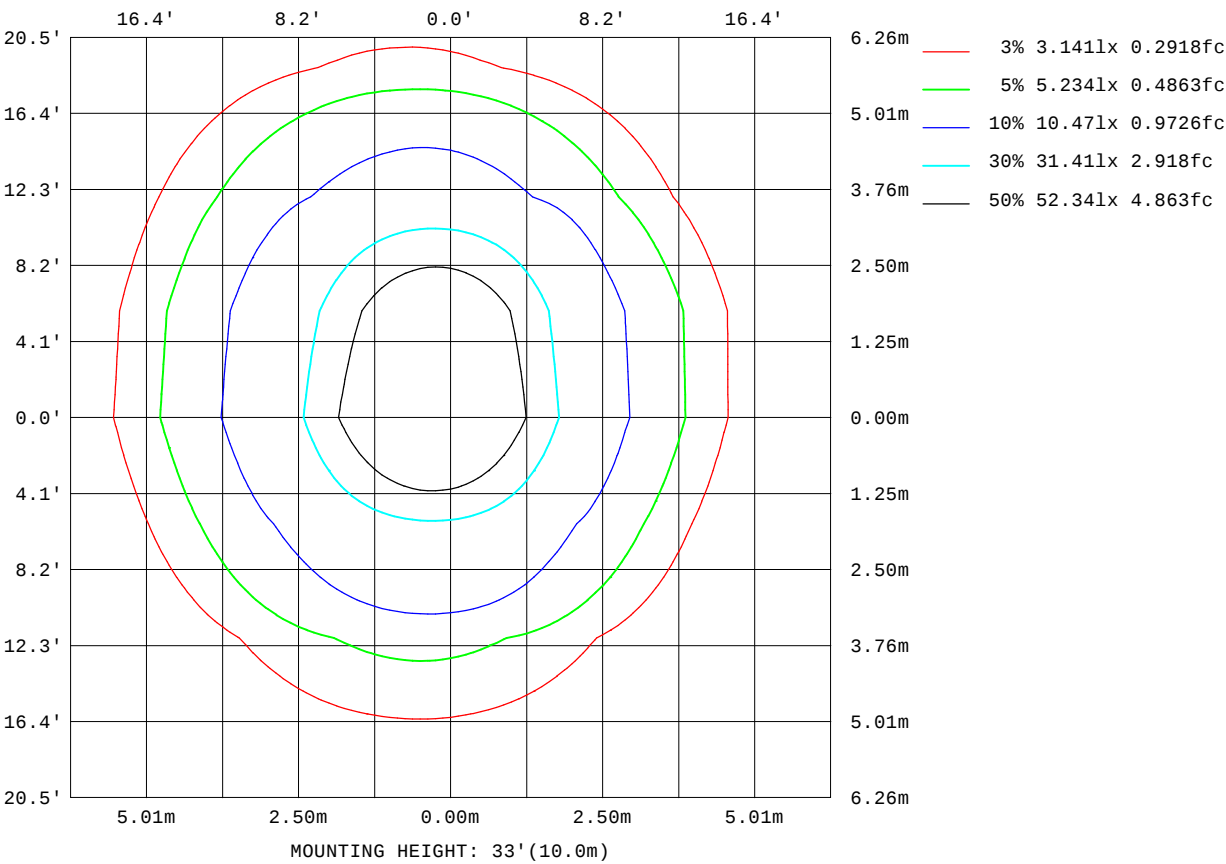


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:1.557A P:37.36W PF:1.000 Lamp Flux:2022.02x1 lm		
NAME: 8.01.020.0009 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

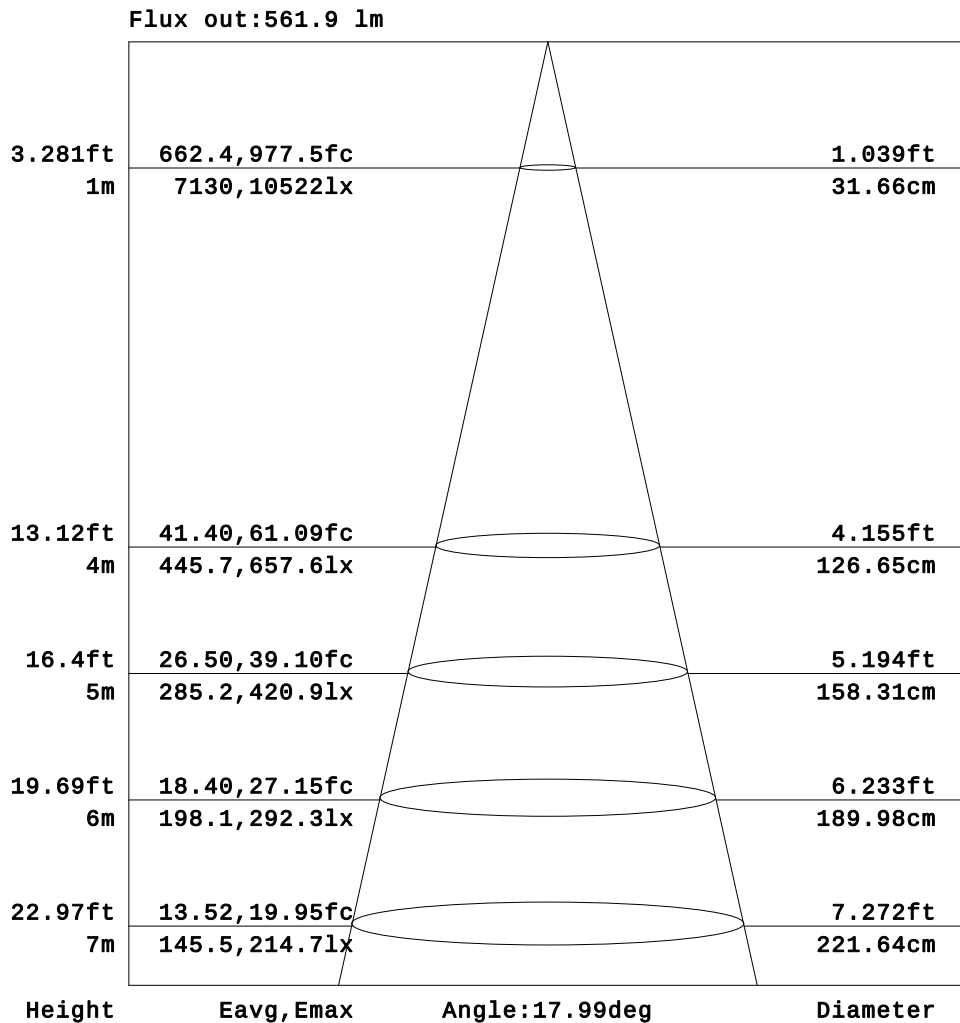


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

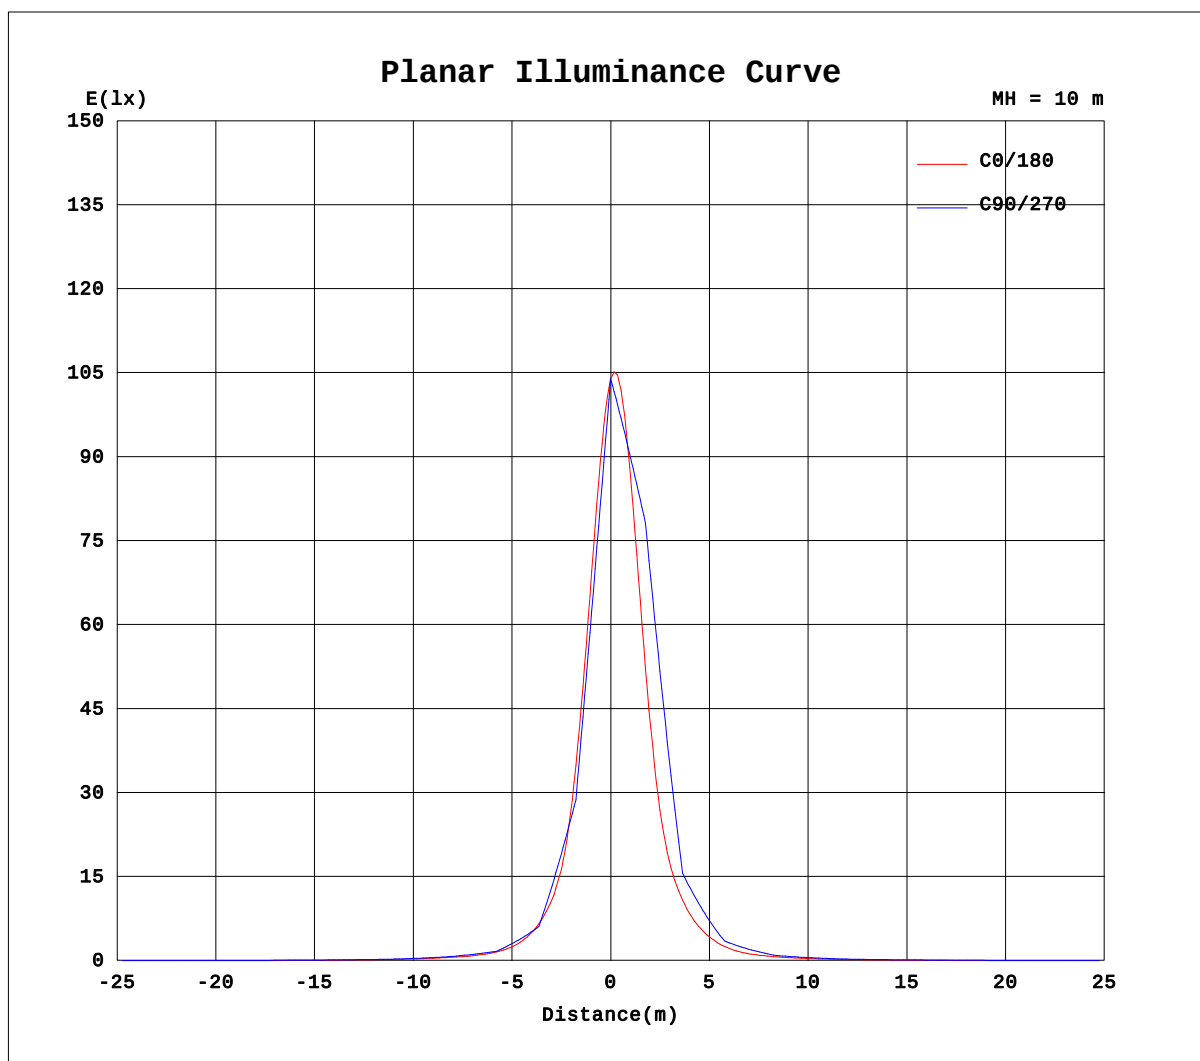

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-09

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.557A P:37.36W PF:1.000 Lamp Flux:2022.02x1 lm		
NAME: 8.01.020.0009 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.40	0.52	0.73	0.73	0.64	0.74	0.77	0.66	0.68	0.69
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.57	0.81	1.12	1.53	1.41	1.31	1.52	1.50	1.31	1.39	1.36
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.50	1.23	1.60	1.88	2.37	2.51	2.49	2.76	2.93	2.84	2.91	2.95
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.31	1.19	2.15	2.45	2.82	3.36	3.58	3.74	4.12	4.34	4.36	4.48	4.50
-55	0.00	0.00	0.00	0.00	0.00	0.24	0.65	1.49	2.50	3.05	3.47	4.15	4.68	5.01	5.46	5.89	6.06	6.26	6.33
-50	0.00	0.00	0.00	0.00	0.00	0.61	1.28	2.16	3.19	3.79	4.35	5.22	5.91	6.44	7.02	7.52	7.86	8.07	8.12
-45	0.00	0.00	0.00	0.00	0.12	0.85	1.66	2.52	3.45	4.24	5.02	6.03	7.12	8.09	9.20	10.1	10.8	11.4	11.5
-40	0.00	0.00	0.00	0.00	0.42	1.47	2.39	3.22	4.07	4.92	6.04	7.30	8.72	10.2	11.8	13.0	14.0	14.8	14.6
-35	0.00	0.00	0.00	0.00	0.50	1.79	2.71	3.52	4.39	5.48	6.85	8.52	10.4	12.4	14.7	17.1	19.3	20.6	20.6
-30	0.00	0.00	0.00	0.00	1.02	2.56	3.39	3.98	5.08	6.48	8.29	10.5	12.9	15.4	18.5	22.1	25.3	26.6	26.2
-25	0.00	0.00	0.00	0.30	1.25	2.53	3.44	4.37	5.50	7.07	9.21	11.8	15.0	19.7	26.8	35.6	44.2	49.7	50.1
-20	0.00	0.00	0.00	0.97	1.93	2.76	3.85	5.02	6.42	8.44	11.1	14.3	18.7	26.4	38.5	52.8	66.1	73.7	72.8
-15	0.00	0.00	0.00	0.85	1.84	2.89	3.89	5.07	6.60	8.87	11.9	15.8	22.4	35.1	56.3	86.4	127	172	188
-10	0.00	0.00	0.13	1.19	2.25	3.29	4.34	5.64	7.54	10.4	14.0	19.3	30.1	50.9	84.8	134	206	284	297
-5	0.00	0.00	0.01	1.25	2.16	3.22	4.27	5.51	7.38	10.2	14.1	19.8	32.0	56.7	100	179	349	582	674
0	0.00	0.00	0.23	1.63	2.56	3.56	4.64	6.00	8.18	11.5	15.9	23.5	41.5	76.1	139	273	585	954	1023
5	0.00	0.00	0.01	1.33	2.30	3.24	4.31	5.55	7.48	10.5	14.6	21.1	35.5	65.1	118	219	454	790	933
10	0.00	0.00	0.11	1.48	2.39	3.34	4.41	5.73	7.77	10.9	15.4	22.6	38.6	70.4	126	232	456	734	809
15	0.00	0.00	0.00	1.14	2.06	2.98	4.02	5.22	6.95	9.61	13.3	18.9	29.7	52.3	90.2	154	272	434	505
20	0.00	0.00	0.04	1.21	2.08	3.03	4.07	5.30	7.01	9.60	13.2	18.2	27.8	46.4	74.7	112	152	186	186
25	0.00	0.00	0.00	0.80	1.70	2.62	3.63	4.72	6.09	8.07	10.9	14.7	20.9	32.1	49.7	72.4	97.1	118	122
30	0.00	0.00	0.00	0.77	1.67	2.62	3.61	4.62	5.83	7.54	10.0	13.2	17.6	23.9	33.0	43.0	51.4	55.4	53.5
35	0.00	0.00	0.00	0.37	1.31	2.27	3.15	4.03	4.99	6.30	8.12	10.5	13.6	17.7	23.3	29.5	35.0	38.1	37.6
40	0.00	0.00	0.00	0.35	1.36	2.28	3.04	3.80	4.60	5.70	7.06	8.84	11.1	13.5	16.1	18.4	20.4	21.0	20.5
45	0.00	0.00	0.00	0.08	0.92	1.90	2.54	3.19	3.91	4.80	5.79	7.08	8.67	10.4	12.2	13.9	15.3	16.1	16.0
50	0.00	0.00	0.00	0.00	0.92	1.81	2.28	2.85	3.55	4.28	4.99	5.91	6.93	7.97	9.08	10.1	10.8	11.2	11.1
55	0.00	0.00	0.00	0.00	0.38	1.28	1.71	2.32	3.01	3.54	4.07	4.83	5.60	6.28	7.07	7.80	8.28	8.67	8.71
60	0.00	0.00	0.00	0.00	0.25	0.96	1.33	2.07	2.71	2.99	3.43	4.07	4.54	4.89	5.38	5.77	5.98	6.18	6.21
65	0.00	0.00	0.00	0.00	0.03	0.44	0.66	1.38	2.11	2.29	2.56	3.08	3.35	3.53	3.93	4.25	4.34	4.52	4.59
70	0.00	0.00	0.00	0.00	0.00	0.00	0.21	1.05	1.65	1.63	1.89	2.25	2.21	2.30	2.65	2.77	2.75	2.93	2.92
75	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.43	0.80	0.82	0.90	1.18	1.19	1.16	1.43	1.52	1.37	1.45	1.47
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.11	0.08	0.32	0.19	0.00	0.02	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.557A P:37.36W PF:1.000 Lamp Flux:2022.02x1 lm		
NAME: 8.01.020.0009 20° LWW-OP-D80-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2		UNIT: ×10cd																	
H(°)	V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.61	0.57	0.60	0.54	0.41	0.39	0.37	0.22	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	1.19	1.16	1.20	1.02	0.80	0.80	0.68	0.37	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	2.79	2.66	2.60	2.36	2.04	1.88	1.68	1.29	1.00	0.78	0.44	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	4.31	4.14	3.95	3.56	3.19	2.91	2.53	2.07	1.78	1.48	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	6.13	5.82	5.50	4.99	4.47	4.04	3.54	2.99	2.57	2.09	1.41	0.57	0.19	0.00	0.00	0.00	0.00	0.00	0.00
-50	7.84	7.38	6.87	6.20	5.57	4.99	4.32	3.73	3.17	2.49	1.82	0.95	0.25	0.00	0.00	0.00	0.00	0.00	0.00
-45	10.9	10.1	9.27	8.26	7.26	6.33	5.39	4.54	3.87	3.09	2.35	1.61	0.84	0.06	0.00	0.00	0.00	0.00	0.00
-40	13.7	12.6	11.3	9.92	8.57	7.29	6.08	5.08	4.27	3.38	2.60	2.00	1.09	0.02	0.00	0.00	0.00	0.00	0.00
-35	19.3	17.1	14.7	12.6	10.8	9.08	7.48	6.07	5.01	4.04	3.19	2.47	1.66	0.51	0.00	0.00	0.00	0.00	0.00
-30	24.0	20.7	17.3	14.5	12.3	10.2	8.26	6.60	5.37	4.33	3.48	2.68	1.85	0.61	0.00	0.00	0.00	0.00	0.00
-25	45.0	36.5	27.5	20.4	15.6	12.4	10.0	7.96	6.26	4.96	3.95	3.06	2.17	1.13	0.12	0.00	0.00	0.00	0.00
-20	63.0	48.6	34.5	24.0	17.5	13.5	10.9	8.57	6.58	5.15	4.05	3.09	2.13	1.15	0.06	0.00	0.00	0.00	0.00
-15	154	101	63.7	39.1	24.6	16.8	12.8	10.0	7.69	5.88	4.58	3.53	2.53	1.53	0.41	0.00	0.00	0.00	0.00
-10	223	136	81.4	47.0	27.6	18.1	13.4	10.5	7.97	6.04	4.66	3.56	2.51	1.49	0.32	0.00	0.00	0.00	0.00
-5	514	275	129	68.8	37.7	22.5	15.5	11.8	8.93	6.66	5.10	3.91	2.84	1.80	0.65	0.00	0.00	0.00	0.00
0	705	336	145	74.8	39.5	23.1	15.7	11.8	8.86	6.56	5.02	3.83	2.73	1.70	0.47	0.00	0.00	0.00	0.00
5	716	371	161	83.8	44.4	25.3	16.8	12.5	9.45	6.97	5.30	4.08	3.00	1.96	0.79	0.00	0.00	0.00	0.00
10	587	290	135	72.8	39.2	23.0	15.7	11.9	8.92	6.60	5.04	3.91	2.82	1.80	0.59	0.00	0.00	0.00	0.00
15	403	228	114	63.6	36.0	22.0	15.3	11.6	8.80	6.58	5.04	3.89	2.86	1.86	0.73	0.00	0.00	0.00	0.00
20	149	104	66.5	40.4	25.4	17.5	13.1	10.2	7.67	5.84	4.53	3.47	2.48	1.52	0.36	0.00	0.00	0.00	0.00
25	103	75.5	51.2	33.2	22.3	16.1	12.3	9.65	7.41	5.71	4.48	3.44	2.47	1.52	0.46	0.00	0.00	0.00	0.00
30	46.5	37.0	27.6	20.7	16.1	12.9	10.4	8.18	6.37	5.04	4.01	3.02	2.07	1.14	0.10	0.00	0.00	0.00	0.00
35	33.8	28.1	22.2	17.5	14.0	11.4	9.33	7.49	5.95	4.75	3.81	2.92	2.02	1.08	0.15	0.00	0.00	0.00	0.00
40	19.0	16.8	14.7	12.7	10.8	9.08	7.48	6.13	5.00	4.06	3.27	2.46	1.61	0.63	0.00	0.00	0.00	0.00	0.00
45	15.0	13.7	12.2	10.7	9.28	7.92	6.66	5.56	4.58	3.70	2.94	2.26	1.52	0.58	0.00	0.00	0.00	0.00	0.00
50	10.6	9.92	9.07	8.12	7.16	6.24	5.37	4.58	3.79	3.02	2.33	1.78	1.08	0.12	0.00	0.00	0.00	0.00	0.00
55	8.42	7.99	7.47	6.77	6.08	5.37	4.62	3.92	3.31	2.67	1.98	1.39	0.78	0.16	0.00	0.00	0.00	0.00	0.00
60	6.06	5.87	5.60	5.14	4.73	4.21	3.58	3.02	2.58	2.04	1.36	0.79	0.19	0.00	0.00	0.00	0.00	0.00	0.00
65	4.45	4.32	4.19	3.83	3.49	3.22	2.81	2.32	1.95	1.54	0.91	0.44	0.16	0.00	0.00	0.00	0.00	0.00	0.00
70	2.79	2.75	2.67	2.36	2.15	2.11	1.84	1.44	1.19	0.81	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.41	1.37	1.37	1.22	1.09	1.06	0.96	0.76	0.61	0.46	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-09

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: