

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6251.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	38.4V x 37.9H
	At 50% of Imax	15.7V x 17.1H
	At 90% of Imax	4.7V x 6.3H
Beam Flux	Total	998.8 lumens per klm.
	To 10% of Imax	668.4 lumens per klm.
	To 50% of Imax	263.3 lumens per klm.
	To 90% of Imax	24.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.9V I:0.2141A P:28.93W PF:0.6116 Lamp Flux:2022.5x1 lm		
NAME: 8.01.020.0013 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080116
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

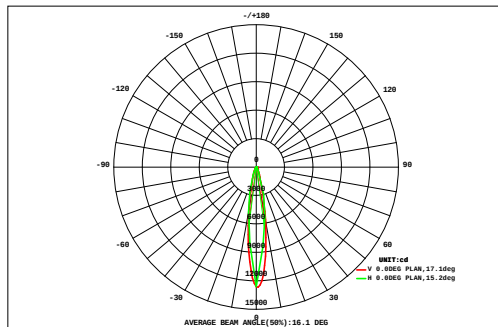

DATA OF LAMP		Eff:69.92lm/W	
MODEL	LWW-OP-D80-L6-RDM	Imax(cd)	12644
NOMINAL POWER(W)	28	AVAILABILITY(%)	67.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1374
NOMINAL FLUX(lm)	2022.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2023
TEST VOLTAGE(V)	220.9	θ @50%(H,V)	17,16DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.46	0.55	0.65	0.78	0.92	1.07	1.20	1.33	1.41	1.43	1.40	1.31	1.20	1.05	0.90	0.76	0.64	0.54	17.6	0.00	
	24	0.51	0.64	0.82	1.04	1.29	1.58	1.87	2.13	2.33	2.43	2.42	2.31	2.10	1.83	1.54	1.27	1.02	0.81	27.9	0.00	
	21	0.65	0.85	1.11	1.42	1.76	2.13	2.49	2.79	2.98	3.03	2.96	2.74	2.43	2.06	1.70	1.37	1.08	0.83	34.4	0.00	
	18	0.81	1.09	1.41	1.82	2.25	2.72	3.14	3.47	3.64	3.63	3.48	3.15	2.73	2.27	1.84	1.45	1.12	0.84	40.9	9.76	
	15	0.80	1.08	1.47	1.99	2.67	3.62	5.07	7.14	9.25	10.5	10.4	8.83	6.64	4.72	3.40	2.56	1.93	1.45	83.5	67.5	
	12	0.96	1.32	1.84	2.52	3.44	4.83	7.04	10.00	12.7	14.1	13.3	10.9	7.88	5.45	3.89	2.90	2.16	1.60	107	92.3	
	9	1.36	1.90	2.63	3.61	4.95	7.14	10.6	14.6	17.4	17.7	15.2	11.2	7.51	5.02	3.65	2.69	1.96	1.43	131	117	
		1.21	1.69	2.35	3.27	4.56	6.89	11.0	16.3	21.4	24.2	23.0	18.4	12.8	8.18	5.14	3.49	2.49	1.80	168	156	
		1.01	1.41	1.98	2.79	3.99	6.41	11.1	17.7	25.3	31.2	31.5	26.2	18.7	11.7	6.80	4.36	3.07	2.21	207	196	
		1.59	2.23	3.14	4.47	7.03	12.7	20.7	29.4	36.6	37.5	31.4	22.3	14.0	7.85	4.67	3.17	2.27	1.62	243	231	
		1.54	2.15	3.02	4.30	6.70	12.0	19.5	27.7	34.7	35.8	30.3	21.8	13.9	7.88	4.71	3.19	2.28	1.63	233	221	
	-9	0.86	1.19	1.62	2.21	2.78	3.42	5.52	9.05	13.5	18.1	19.9	17.6	13.3	8.91	5.53	3.69	2.62	1.90	132	116	
	-12	1.00	1.37	1.86	2.51	3.18	3.96	5.55	7.83	10.2	12.0	12.1	10.3	7.73	5.46	3.81	2.74	1.99	1.46	95.0	78.9	
	-15	1.19	1.62	2.20	2.94	3.81	4.95	6.23	7.32	7.33	5.85	3.86	2.24	1.49	1.54	1.84	1.65	1.28	0.95	58.3	39.5	
	-18	0.63	0.83	1.10	1.46	1.89	2.37	3.05	4.06	5.25	6.26	6.60	6.06	4.88	3.65	2.69	2.07	1.57	1.19	55.6	35.9	
	-21	0.51	0.64	0.82	1.04	1.29	1.44	1.56	1.85	2.40	3.16	3.78	3.93	3.47	2.76	2.09	1.65	1.28	0.99	34.7	12.1	
	-24	0.60	0.76	0.95	1.15	1.35	1.49	1.43	1.11	0.70	0.47	0.41	0.48	0.63	0.80	0.82	0.71	0.59	0.47	14.9	0.00	
	-27	0.47	0.56	0.69	0.83	0.97	1.08	1.08	0.99	1.05	1.10	1.10	1.06	0.97	0.88	0.84	0.73	0.61	0.50	15.5	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	16.2	21.9	29.7	40.1	54.8	79.8	118	165	208	228	213	171	122	82.0	55.9	40.4	30.0	22.2	1699	---		
Φ a	0.00	0.00	3.57	12.5	35.4	62.9	102	152	196	217	202	159	110	68.6	37.6	13.9	1.14	0.00	---	1374		

one-half-peak spread: U:7.6,D:8.4 , L:9.0,R:8.3


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.9V I:0.2141A P:28.93W PF:0.6116 Lamp Flux:2022.5x1 lm		
NAME: 8.01.020.0013 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080116
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

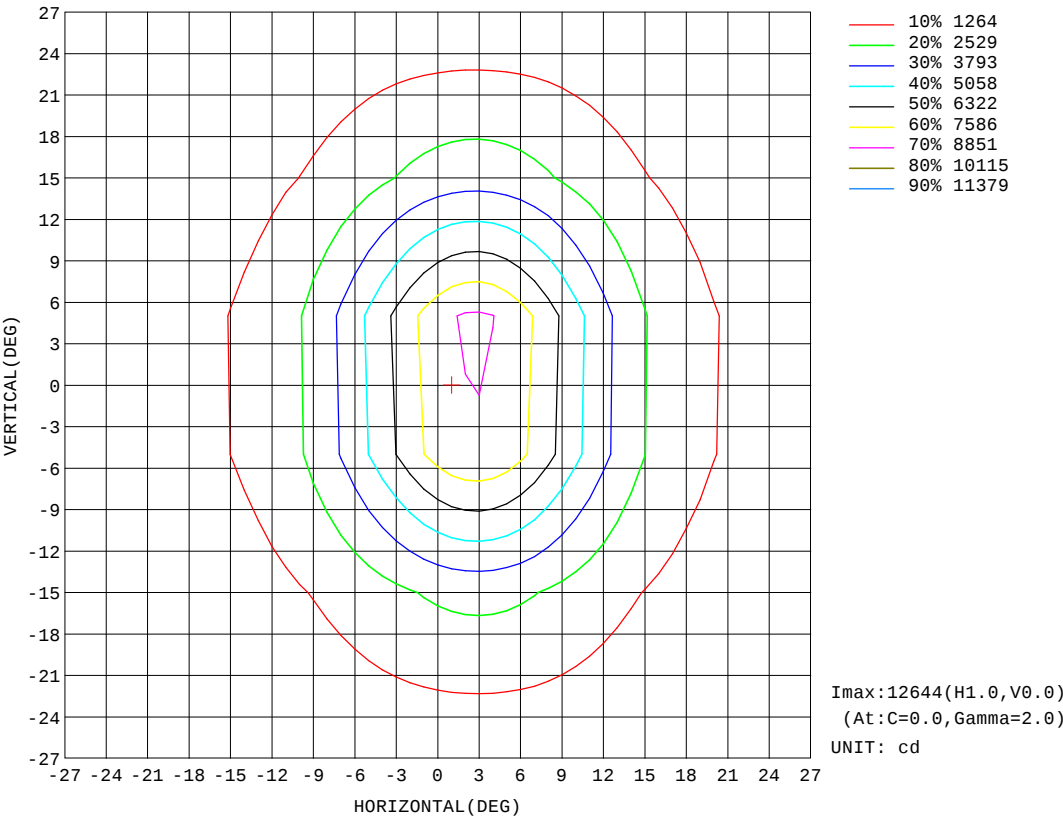


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.9V I:0.2141A P:28.93W PF:0.6116 Lamp Flux:2022.5x1 lm		
NAME: 8.01.020.0013 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080116
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

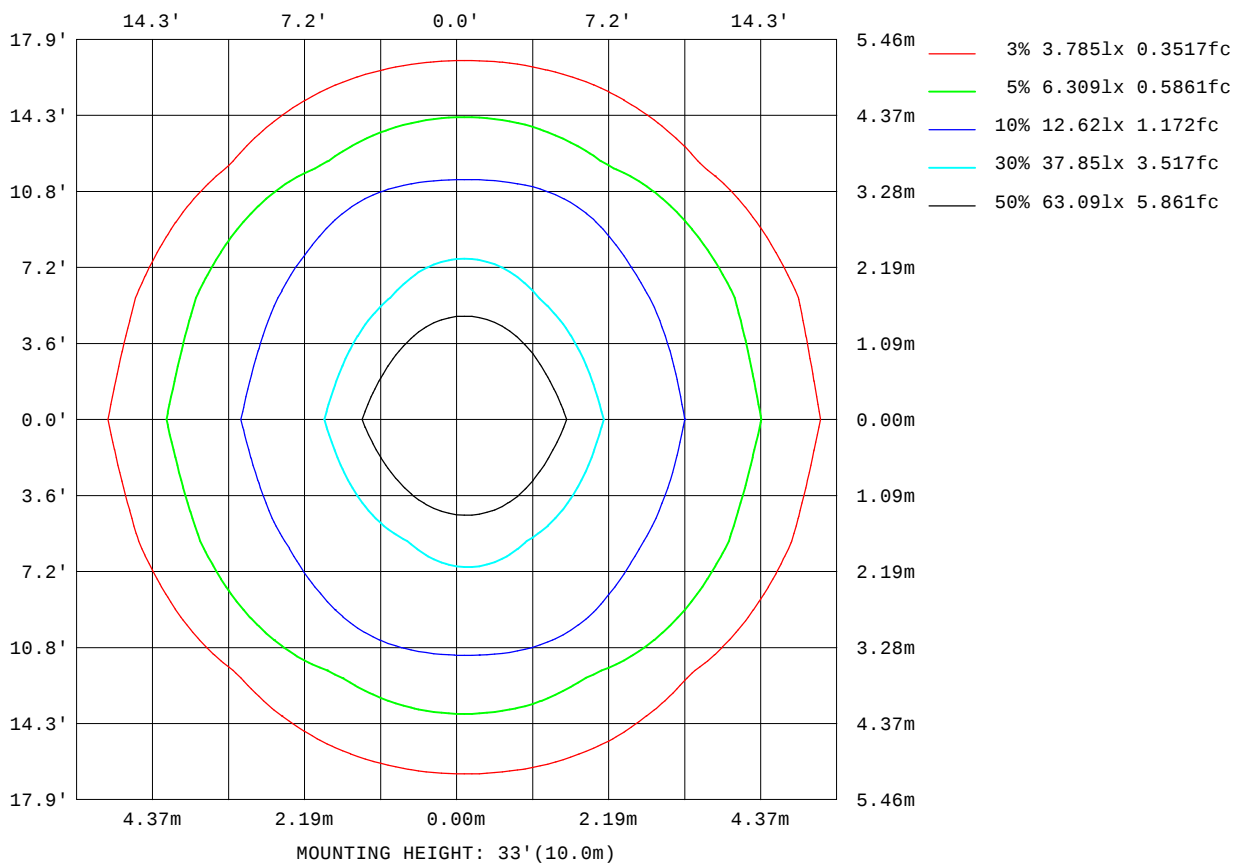


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.9V I:0.2141A P:28.93W PF:0.6116 Lamp Flux:2022.5x1 lm		
NAME: 8.01.020.0013 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080116
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

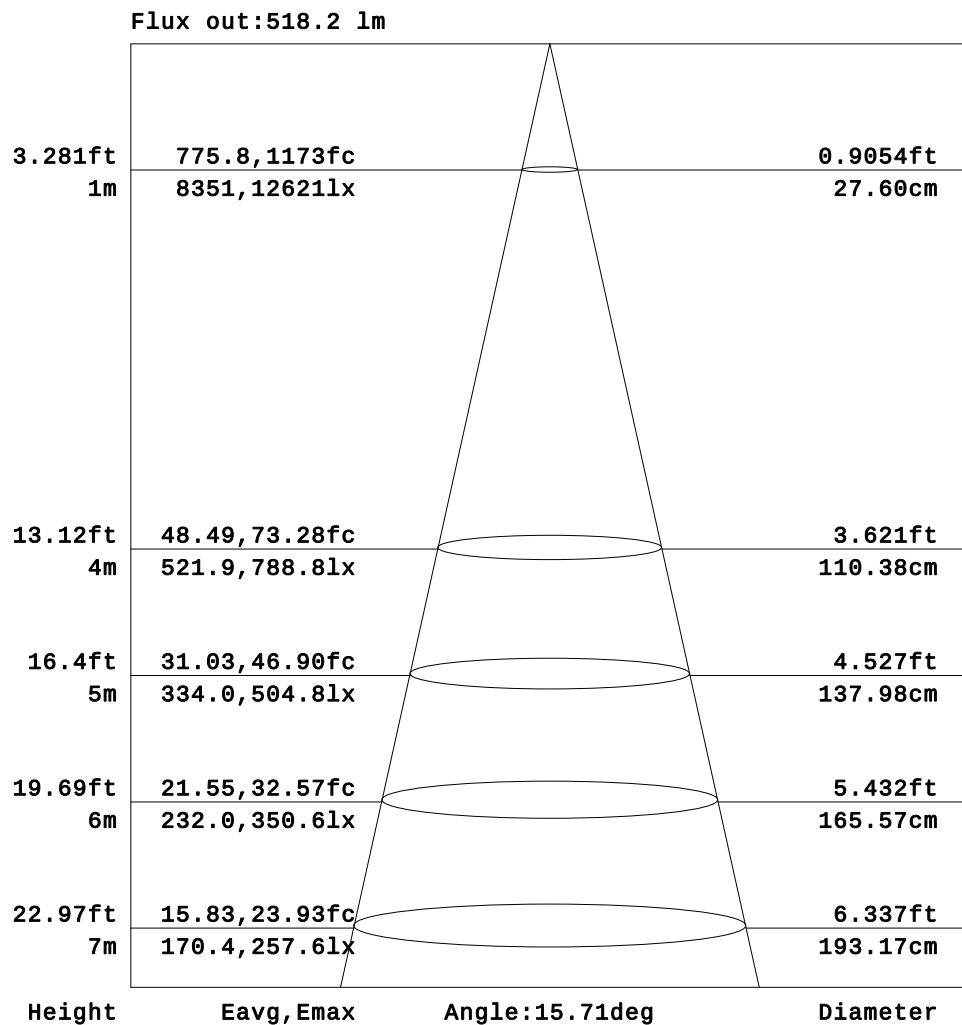


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-27

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

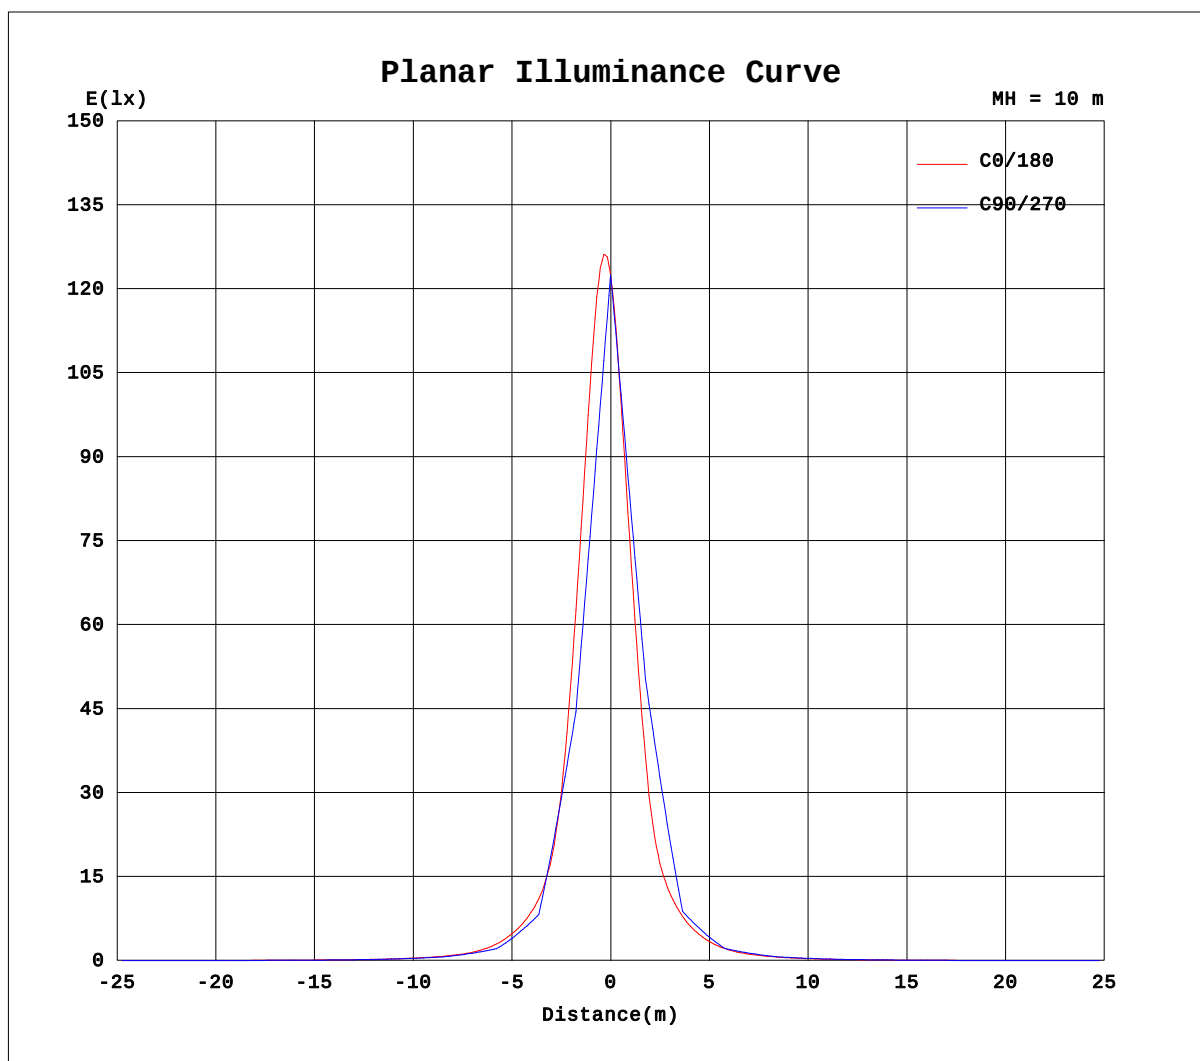

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-27

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.2141A P:28.93W PF:0.6116 Lamp Flux:2022.5x1 lm		
NAME: 8.01.020.0013 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080116
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1		UNIT: ×10cd																		
H(°) \ V(°)		-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.19	0.23	0.40	0.53	0.52	0.54	0.65	0.70	0.69	0.74
-70		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.42	0.56	0.91	1.09	1.03	1.17	1.33	1.40	1.40	1.53
-65		0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.36	0.80	1.25	1.39	1.74	2.10	2.26	2.36	2.66	2.86	2.90	3.04
-60		0.00	0.00	0.00	0.00	0.00	0.12	0.60	1.04	1.86	2.19	2.43	2.88	3.31	3.55	3.76	4.18	4.36	4.49	4.65
-55		0.00	0.00	0.00	0.00	0.00	0.39	1.03	1.35	2.11	2.79	3.18	3.57	4.12	4.58	4.94	5.41	5.85	6.14	6.40
-50		0.00	0.00	0.00	0.00	0.13	0.96	1.75	2.25	2.98	3.74	4.21	4.70	5.34	5.90	6.45	7.04	7.59	7.99	8.32
-45		0.00	0.00	0.00	0.00	0.10	1.18	2.03	2.59	3.26	4.06	4.80	5.49	6.35	7.33	8.32	9.34	10.3	11.4	12.1
-40		0.00	0.00	0.00	0.00	0.68	1.78	2.78	3.46	4.16	5.02	5.93	6.91	8.14	9.56	11.0	12.4	13.8	15.6	15.9
-35		0.00	0.00	0.00	0.00	0.61	1.76	2.74	3.64	4.44	5.33	6.49	7.93	9.66	11.7	13.9	16.5	19.4	22.4	24.4
-30		0.00	0.00	0.00	0.29	1.22	2.38	3.46	4.46	5.38	6.53	8.13	10.3	12.8	15.5	18.8	22.9	27.4	31.3	33.3
-25		0.00	0.00	0.00	0.13	1.28	2.24	3.31	4.39	5.45	6.77	8.70	11.3	14.6	19.0	26.0	35.7	47.2	58.6	65.8
-20		0.00	0.00	0.00	0.71	1.97	2.97	4.03	5.14	6.47	8.36	11.2	14.9	19.5	27.2	40.2	57.4	76.6	93.1	100
-15		0.00	0.00	0.00	0.40	1.75	2.79	3.88	4.99	6.28	8.19	11.3	15.4	21.5	31.6	49.6	77.7	120	193	273
-10		0.00	0.00	0.00	1.22	2.37	3.47	4.61	5.77	7.41	10.2	14.3	20.2	30.1	48.3	78.8	127	212	363	477
-5		0.00	0.00	0.00	0.55	1.99	3.10	4.26	5.42	6.86	9.25	13.1	18.7	27.8	45.2	75.3	127	241	507	808
0		0.00	0.00	0.00	1.30	2.43	3.63	4.86	6.08	7.93	11.1	15.9	23.1	37.1	62.8	106	190	453	905	1258
5		0.00	0.00	0.00	0.47	1.84	2.98	4.17	5.36	6.84	9.22	13.1	18.6	28.0	45.6	76.3	129	247	525	838
10		0.00	0.00	0.00	0.98	2.09	3.27	4.45	5.71	7.39	10.1	14.2	20.3	30.7	49.4	81.7	133	231	411	538
15		0.00	0.00	0.00	0.24	1.50	2.64	3.81	4.97	6.26	8.15	11.2	15.5	21.6	32.4	51.4	81.2	127	213	306
20		0.00	0.00	0.00	0.63	1.80	2.94	4.12	5.19	6.45	8.34	11.3	15.0	19.8	28.2	41.9	60.4	81.3	99.1	107
25		0.00	0.00	0.00	0.05	1.21	2.34	3.41	4.40	5.36	6.67	8.62	11.3	14.6	19.3	26.8	37.1	49.5	61.7	69.5
30		0.00	0.00	0.00	0.27	1.58	2.64	3.52	4.33	5.20	6.37	7.92	10.1	12.7	15.5	19.1	23.4	28.2	32.1	34.1
35		0.00	0.00	0.00	0.00	0.90	2.02	2.78	3.50	4.28	5.22	6.27	7.68	9.50	11.6	14.1	16.9	20.0	22.9	24.7
40		0.00	0.00	0.00	0.00	1.29	2.03	2.57	3.27	4.06	4.86	5.64	6.64	7.90	9.43	11.1	12.8	14.3	15.4	15.9
45		0.00	0.00	0.00	0.00	0.38	1.43	1.88	2.50	3.24	3.89	4.45	5.19	6.08	7.07	8.24	9.44	10.6	11.5	12.0
50		0.00	0.00	0.00	0.00	0.43	1.12	1.59	2.29	2.95	3.36	3.79	4.45	5.01	5.62	6.32	7.03	7.61	8.09	8.34
55		0.00	0.00	0.00	0.00	0.02	0.50	0.90	1.55	2.16	2.43	2.77	3.30	3.77	4.16	4.69	5.23	5.66	6.05	6.34
60		0.00	0.00	0.00	0.00	0.00	0.02	0.67	1.36	1.63	1.73	2.15	2.57	2.82	3.09	3.52	3.79	4.03	4.28	4.39
65		0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.54	0.81	0.85	1.18	1.51	1.65	1.84	2.16	2.43	2.59	2.80	2.98
70		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.55	0.58	0.62	0.81	1.04	1.21	1.30	1.50	1.56
75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.20	0.30	0.29	0.35	0.49	0.58	0.62	0.71	0.79
80		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-27

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:0.2141A P:28.93W PF:0.6116 Lamp Flux:2022.5x1 lm		
NAME: 8.01.020.0013 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080116
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.78	0.73	0.73	0.78	0.73	0.66	0.70	0.68	0.49	0.43	0.41	0.18	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.53	1.43	1.51	1.55	1.37	1.35	1.43	1.25	0.88	0.91	0.67	0.12	0.00	0.00	0.00	0.00	0.00	0.00	
-65	3.12	2.98	2.90	2.89	2.65	2.41	2.37	2.16	1.73	1.58	1.44	0.91	0.44	0.24	0.00	0.00	0.00	0.00	
-60	4.63	4.42	4.31	4.08	3.68	3.44	3.22	2.74	2.37	2.26	1.87	1.20	0.73	0.13	0.00	0.00	0.00	0.00	
-55	6.51	6.26	5.93	5.58	5.06	4.60	4.24	3.74	3.25	2.97	2.53	1.90	1.38	0.99	0.21	0.00	0.00	0.00	
-50	8.26	7.85	7.30	6.68	6.03	5.47	4.90	4.29	3.86	3.44	2.74	2.10	1.77	1.19	0.00	0.00	0.00	0.00	
-45	12.0	11.7	10.5	9.46	8.37	7.29	6.35	5.47	4.78	4.20	3.49	2.82	2.31	1.80	0.70	0.00	0.00	0.00	
-40	15.8	14.7	12.9	11.4	9.82	8.33	7.07	6.04	5.24	4.44	3.67	3.11	2.57	1.73	0.47	0.00	0.00	0.00	
-35	24.3	23.0	20.1	16.8	14.0	11.7	9.67	7.90	6.53	5.44	4.53	3.80	3.10	2.27	1.15	0.05	0.00	0.00	
-30	32.2	29.1	24.5	19.9	16.1	13.3	10.8	8.56	6.89	5.67	4.78	3.99	3.04	2.01	0.85	0.00	0.00	0.00	
-25	66.2	59.5	48.3	36.4	26.5	19.2	14.6	11.3	8.78	6.87	5.57	4.59	3.63	2.55	1.46	0.27	0.00	0.00	
-20	96.6	81.6	62.4	44.4	30.3	20.9	15.5	11.9	8.97	6.89	5.58	4.43	3.35	2.24	1.14	0.00	0.00	0.00	
-15	282	204	124	79.8	51.4	32.7	21.3	15.3	11.3	8.38	6.45	5.13	4.00	2.86	1.78	0.55	0.00	0.00	
-10	419	254	143	89.6	55.5	33.9	21.3	15.2	11.1	8.09	6.21	4.86	3.76	2.61	1.51	0.09	0.00	0.00	
-5	829	534	254	129	77.5	46.7	27.9	18.6	13.3	9.52	7.05	5.55	4.35	3.18	2.08	0.74	0.00	0.00	
0	1041	564	233	120	71.4	41.7	25.2	17.2	12.2	8.68	6.56	5.21	4.07	2.88	1.75	0.17	0.00	0.00	
5	855	547	259	131	79.3	47.8	28.5	19.0	13.6	9.69	7.16	5.67	4.50	3.32	2.23	0.83	0.00	0.00	
10	460	272	150	94.1	58.7	35.6	22.5	16.0	11.6	8.37	6.43	5.14	4.06	2.88	1.80	0.19	0.00	0.00	
15	311	219	131	84.0	54.6	34.7	22.6	16.2	11.9	8.77	6.68	5.31	4.24	3.12	2.10	0.78	0.00	0.00	
20	103	87.0	66.4	47.6	32.5	22.3	16.7	12.6	9.53	7.26	5.75	4.56	3.56	2.52	1.50	0.05	0.00	0.00	
25	69.8	62.6	50.6	38.5	28.2	20.6	15.7	12.2	9.42	7.32	5.88	4.73	3.71	2.65	1.70	0.51	0.00	0.00	
30	32.9	29.5	25.0	20.6	17.1	14.3	11.7	9.34	7.47	6.12	5.08	4.06	2.99	2.02	1.07	0.00	0.00	0.00	
35	24.9	23.0	20.2	17.4	14.7	12.6	10.5	8.68	7.12	5.86	4.90	4.09	3.16	2.14	1.18	0.16	0.00	0.00	
40	15.7	14.5	13.3	12.0	10.6	9.15	7.81	6.69	5.69	4.78	4.09	3.42	2.52	1.50	0.51	0.00	0.00	0.00	
45	12.1	11.5	10.7	9.85	8.88	7.94	6.94	6.06	5.33	4.52	3.76	3.17	2.58	1.66	0.62	0.00	0.00	0.00	
50	8.24	7.90	7.48	6.97	6.46	5.92	5.33	4.84	4.33	3.60	2.94	2.51	1.99	1.00	0.00	0.00	0.00	0.00	
55	6.34	6.15	5.91	5.59	5.22	4.92	4.50	4.03	3.70	3.26	2.60	2.06	1.74	0.99	0.18	0.00	0.00	0.00	
60	4.30	4.21	4.13	3.89	3.75	3.61	3.28	2.95	2.76	2.41	1.76	1.38	1.04	0.16	0.00	0.00	0.00	0.00	
65	2.93	2.84	2.82	2.68	2.51	2.50	2.38	2.09	1.94	1.90	1.41	0.85	0.60	0.27	0.00	0.00	0.00	0.00	
70	1.47	1.45	1.44	1.31	1.25	1.35	1.28	1.04	1.11	1.07	0.53	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.76	0.72	0.73	0.69	0.62	0.65	0.66	0.56	0.52	0.60	0.40	0.11	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-27

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: