

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1787.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	88.6V x 68.3H
	At 50% of Imax	45.7V x 24.0H
	At 90% of Imax	15.5V x 8.6H
Beam Flux	Total	999.2 lumens per klm.
	To 10% of Imax	760.0 lumens per klm.
	To 50% of Imax	318.8 lumens per klm.
	To 90% of Imax	45.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.8V I:0.2858A P:60.15W PF:0.9571 Lamp Flux:5630.87x1 lm		
NAME: 8.01.020.0018 20x40° LW-OP-D80-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

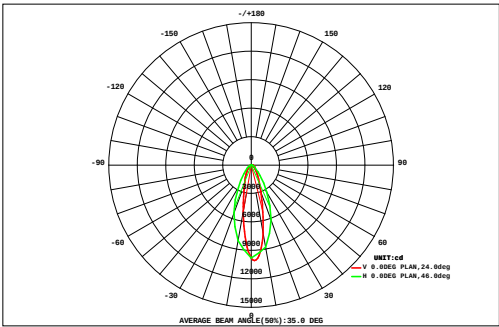

DATA OF LAMP		Eff:93.62lm/W	
MODEL	LW-OP-D80-L12-S	Imax(cd)	10062
NOMINAL POWER(W)	60	AVAILABILITY(%)	76.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	4293
NOMINAL FLUX(lm)	5630.87	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	5631
TEST VOLTAGE(V)	219.8	θ @50%(H,V)	24,46DEG


		AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.02	0.27	0.71	1.30	2.02	2.85	3.67	4.38	4.90	5.05	4.78	4.22	3.50	2.68	1.86	1.16	0.64	0.27	44.3	0.00	
	64	0.16	0.54	1.16	2.00	3.09	4.26	5.43	6.54	7.29	7.49	7.10	6.24	5.12	3.86	2.66	1.66	0.94	0.43	66.0	0.00	
	56	0.29	0.82	1.67	2.89	4.47	6.24	8.11	9.89	11.2	11.5	10.7	9.19	7.33	5.45	3.74	2.31	1.28	0.60	97.7	0.00	
	48	0.42	1.11	2.24	3.94	6.15	8.79	12.0	15.6	19.3	20.3	17.6	13.8	10.3	7.35	4.96	3.05	1.65	0.77	149	39.2	
	40	0.56	1.41	2.85	5.07	8.00	11.8	17.2	25.0	35.1	38.3	30.2	20.8	14.1	9.51	6.24	3.81	2.03	0.93	233	150	
	32	0.66	1.67	3.42	6.04	9.66	15.1	23.7	39.0	62.4	70.5	50.8	30.4	18.7	11.8	7.46	4.49	2.35	1.05	359	292	
	24	0.75	1.86	3.87	6.87	11.3	18.5	31.2	56.6	101	117	77.7	41.3	23.2	13.7	8.31	4.94	2.60	1.15	521	462	
		0.80	1.98	4.12	7.31	12.3	20.8	36.5	70.2	133	158	102	50.3	26.6	15.3	9.04	5.31	2.79	1.22	658	603	
		0.83	2.05	4.25	7.54	12.8	22.0	39.3	78.5	154	184	117	55.7	28.7	16.2	9.45	5.51	2.90	1.27	742	688	
		0.83	2.04	4.25	7.54	12.8	21.9	38.9	78.1	153	182	116	55.5	28.8	16.2	9.44	5.52	2.91	1.27	737	683	
		0.79	1.95	4.04	7.18	12.0	20.2	35.0	66.1	124	148	97.5	48.9	26.3	15.3	9.06	5.35	2.82	1.24	626	569	
	-24	0.70	1.77	3.66	6.51	10.6	17.2	28.5	50.1	87.8	102	70.6	38.9	22.4	13.4	8.19	4.89	2.59	1.16	471	411	
-32	0.59	1.53	3.15	5.62	9.08	14.1	21.8	35.0	55.2	63.1	46.9	28.9	18.0	11.4	7.31	4.42	2.32	1.04	329	260		
-40	0.43	1.25	2.58	4.63	7.42	11.0	15.9	22.5	30.2	33.3	27.7	19.9	13.8	9.40	6.25	3.81	2.02	0.87	213	128		
-48	0.26	0.92	2.01	3.58	5.69	8.21	11.1	13.8	15.7	16.2	15.3	13.0	10.1	7.37	5.03	3.06	1.65	0.68	134	8.28		
-56	0.14	0.58	1.43	2.57	4.08	5.68	7.13	8.31	9.04	9.23	9.00	8.17	6.90	5.41	3.80	2.35	1.23	0.53	85.6	0.00		
-64	0.05	0.34	0.94	1.80	2.77	3.82	4.85	5.80	6.53	6.73	6.40	5.66	4.73	3.71	2.67	1.71	0.87	0.38	59.8	0.00		
-72	0.01	0.12	0.51	1.10	1.76	2.52	3.26	3.87	4.31	4.45	4.27	3.83	3.20	2.48	1.78	1.14	0.57	0.23	39.4	0.00		
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72	
		Φ t	8.28	22.2	46.8	83.5	136	215	344	589	1014	1177	811	455	272	171	107	64.5	34.1	15.1	5565	---
		Φ a	0.00	0.00	0.00	0.00	0.00	104	259	520	951	1115	747	380	182	35.6	0.00	0.00	0.00	0.00	---	4293

one-half-peak spread: U:21.8,D:24.3 , L:11.9, Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-09-10	Remarks:

ISOCANDELA DIAGRAM

Test:U:219.8V I:0.2858A P:60.15W PF:0.9571 Lamp Flux:5630.87x1 lm		
NAME: 8.01.020.0018 20x40° LWW-OP-D80-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

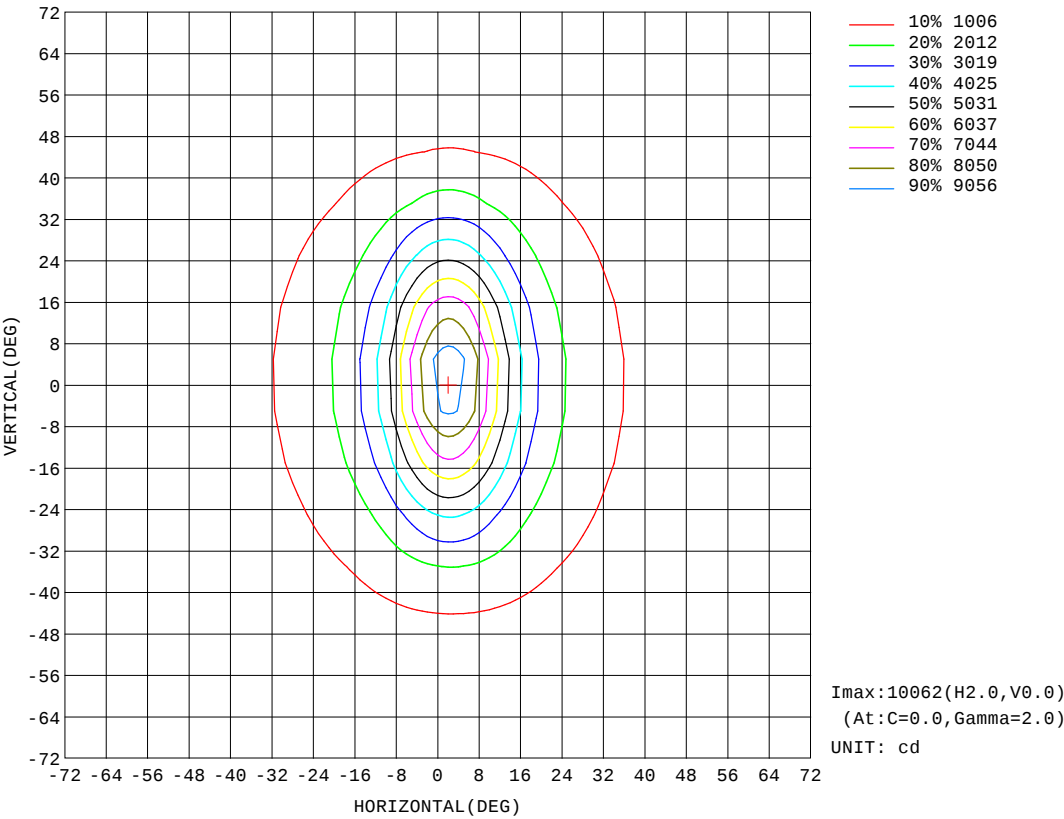


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:219.8V I:0.2858A P:60.15W PF:0.9571 Lamp Flux:5630.87x1 lm		
NAME: 8.01.020.0018 20x40° LWW-OP-D80-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

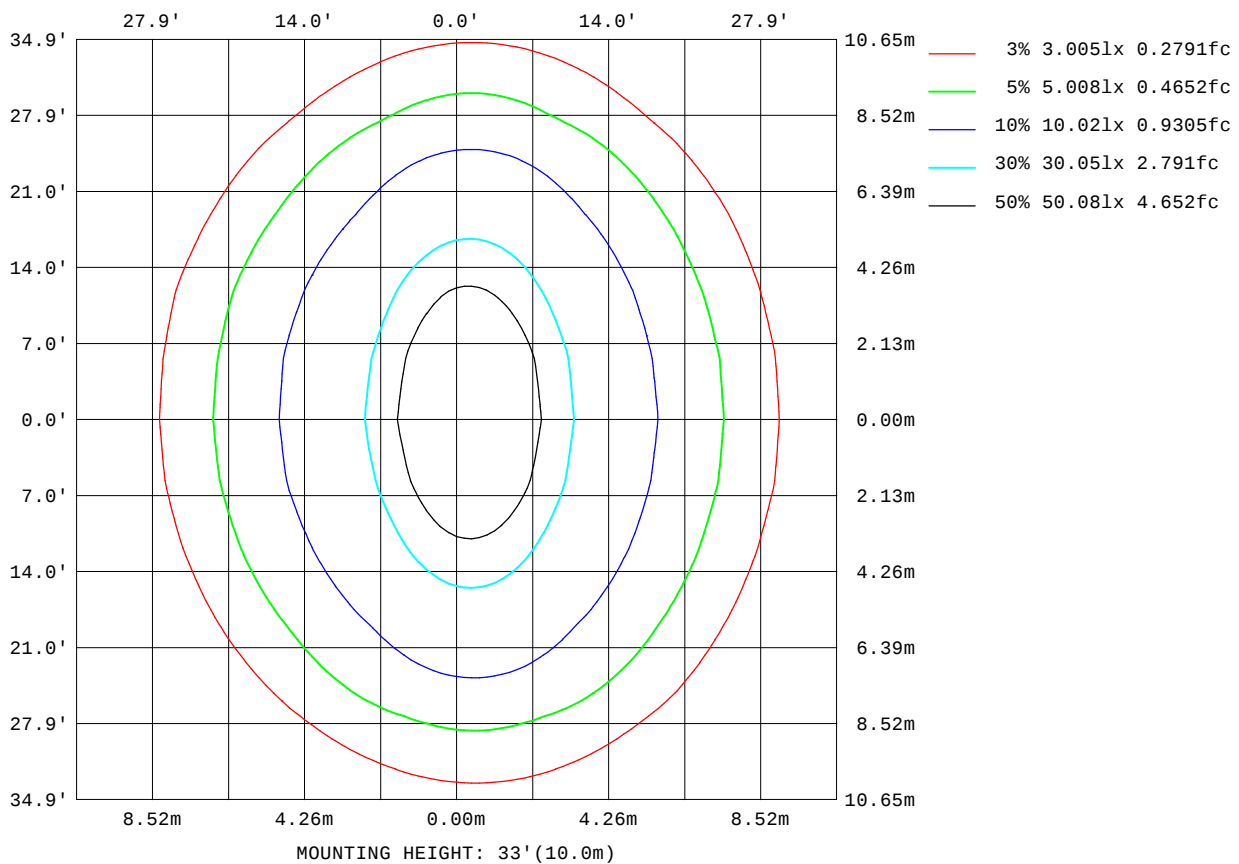


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.8V I:0.2858A P:60.15W PF:0.9571 Lamp Flux:5630.87x1 lm		
NAME: 8.01.020.0018 20x40° LWW-OP-D80-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

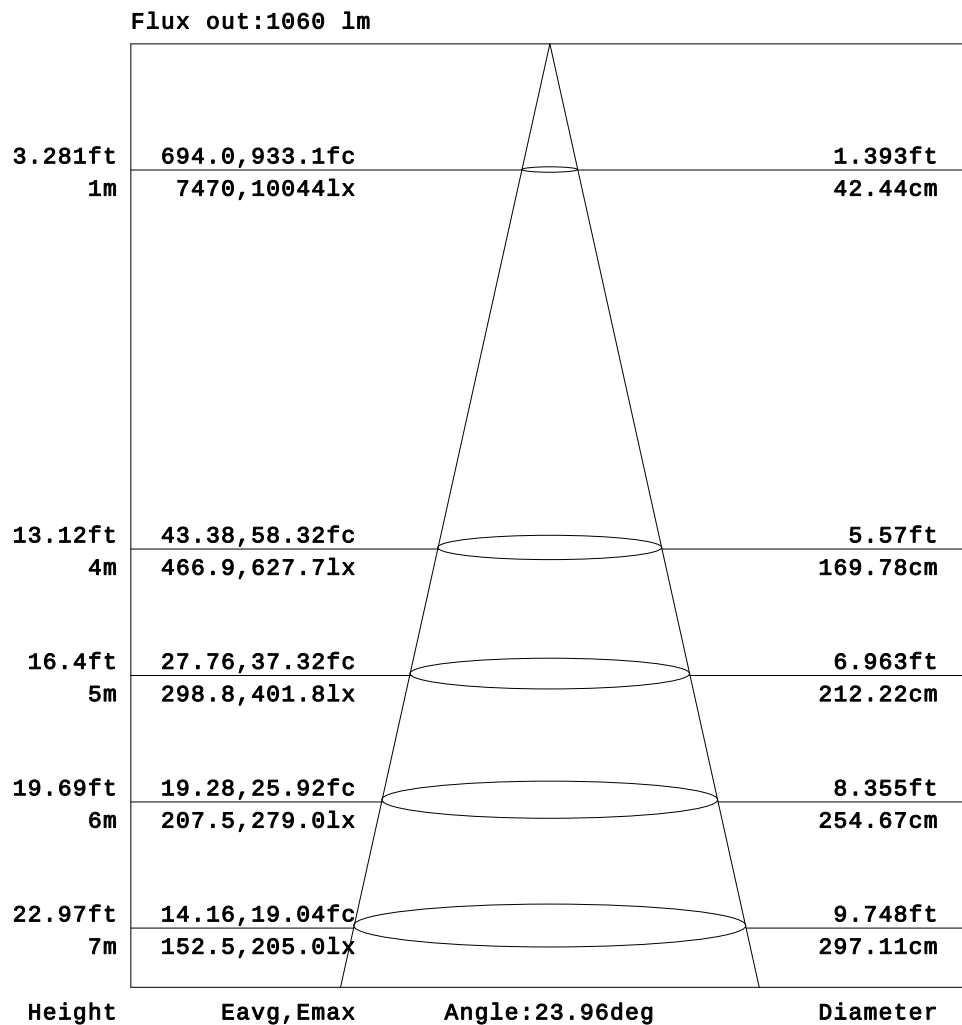


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

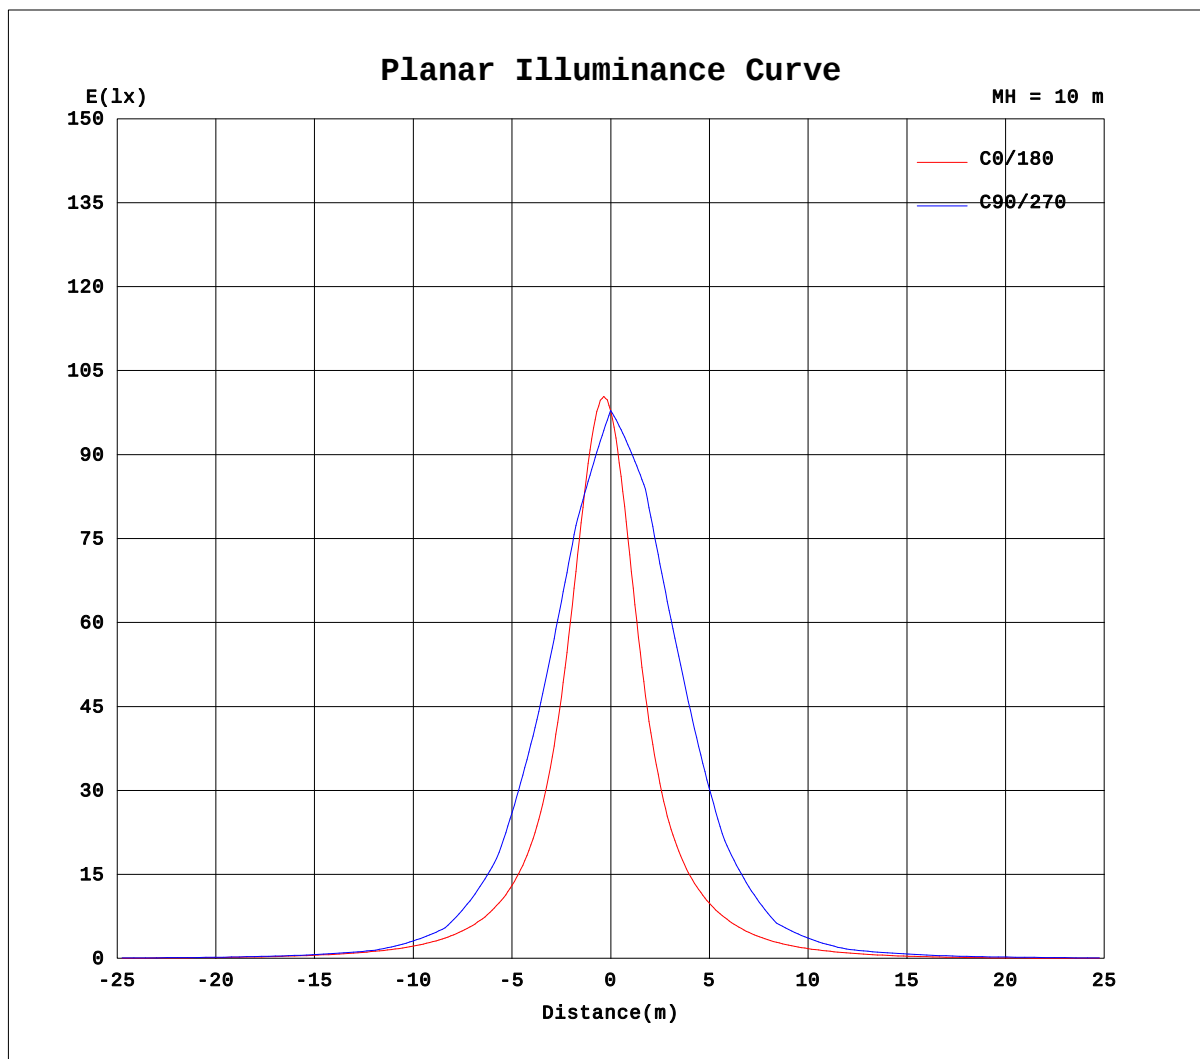

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-09-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.8V I:0.2858A P:60.15W PF:0.9571 Lamp Flux:5630.87x1 lm		
NAME: 8.01.020.0018 20x40° LWW-OP-D80-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.41	2.64	4.09	5.72	7.35	8.30	8.51	7.99	7.90
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.32	1.07	2.04	3.17	4.77	6.37	8.18	10.0	11.8	12.9	13.7	13.9	14.2
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.64	2.15	4.08	6.33	8.13	10.1	12.3	14.3	16.1	17.6	18.8	19.8	20.5
-65	0.00	0.00	0.00	0.00	0.00	0.72	2.03	4.02	6.49	9.24	11.6	14.1	16.7	19.1	21.4	23.3	25.0	26.6	27.4
-60	0.00	0.00	0.00	0.00	0.00	1.45	3.41	5.89	8.91	12.1	15.1	18.2	21.1	23.9	26.6	29.0	31.3	33.4	34.4
-55	0.00	0.00	0.00	0.00	0.64	2.53	4.99	8.23	11.7	15.6	19.5	23.8	27.8	31.6	35.3	38.6	41.8	44.4	45.9
-50	0.00	0.00	0.00	0.00	1.29	3.61	6.58	10.6	14.5	19.0	23.9	29.4	34.5	39.3	44.0	48.3	52.3	55.4	57.4
-45	0.00	0.00	0.00	0.25	2.22	5.13	8.76	13.2	17.8	23.2	29.4	36.2	43.2	50.4	58.5	67.1	75.9	84.3	90.1
-40	0.00	0.00	0.00	0.49	3.16	6.65	10.9	15.9	21.2	27.4	34.9	43.0	51.9	61.4	73.1	85.9	99.4	113	123
-35	0.00	0.00	0.00	1.14	4.23	8.49	13.0	18.0	24.5	31.8	40.4	50.1	61.2	74.2	91.0	112	140	173	199
-30	0.00	0.00	0.00	1.79	5.29	10.3	15.1	20.2	27.8	36.3	45.9	57.1	70.5	87.0	109	139	181	234	276
-25	0.00	0.00	0.00	2.91	6.52	11.2	16.5	22.6	31.0	40.1	50.7	63.5	79.9	102	131	174	240	332	404
-20	0.00	0.00	0.00	4.03	7.74	12.0	17.8	25.0	34.1	44.0	55.4	69.9	89.3	116	154	210	299	430	533
-15	0.00	0.00	0.38	4.12	8.25	12.9	18.9	26.5	36.0	46.5	58.9	75.2	97.5	129	174	244	360	531	672
-10	0.00	0.00	0.77	4.21	8.76	13.8	19.9	28.0	37.9	49.0	62.5	80.6	106	142	194	277	420	631	810
-5	0.00	0.00	0.95	4.59	9.00	14.0	20.2	28.5	38.8	50.0	63.9	83.0	109	147	203	295	456	696	895
0	0.00	0.00	1.13	4.97	9.24	14.3	20.6	29.1	39.6	51.1	65.4	85.4	113	152	212	312	492	761	979
5	0.00	0.00	1.04	4.86	9.07	14.1	20.4	28.8	39.0	50.3	64.4	83.8	111	150	207	302	470	722	929
10	0.00	0.00	0.95	4.75	8.90	14.0	20.2	28.5	38.5	49.6	63.5	82.2	109	147	202	293	449	683	878
15	0.00	0.00	0.81	4.54	8.59	13.5	19.4	27.3	37.2	48.0	60.9	78.3	102	136	185	263	396	588	746
20	0.00	0.00	0.67	4.32	8.27	12.9	18.7	26.2	35.9	46.4	58.4	74.4	95.7	126	168	232	342	493	613
25	0.00	0.00	0.34	3.85	7.60	12.0	17.4	24.3	33.2	42.8	53.8	67.5	85.4	110	144	194	275	384	469
30	0.00	0.00	0.01	3.37	6.94	11.1	16.2	22.5	30.4	39.3	49.2	60.6	75.2	94.1	120	155	207	274	325
35	0.00	0.00	0.00	2.80	6.08	9.88	14.5	20.1	27.0	35.0	43.9	53.7	65.6	80.2	99.2	124	159	202	233
40	0.00	0.00	0.00	2.22	5.23	8.68	12.8	17.6	23.6	30.6	38.5	46.7	55.9	66.4	78.8	93.4	111	130	142
45	0.00	0.00	0.00	1.50	4.23	7.27	10.9	15.1	20.1	25.9	32.4	39.2	46.6	54.6	63.6	73.7	85.0	96.3	104
50	0.00	0.00	0.00	0.78	3.24	5.85	8.95	12.5	16.5	21.2	26.4	31.7	37.2	42.8	48.5	53.9	58.9	62.7	65.1
55	0.00	0.00	0.00	0.39	2.27	4.59	7.19	10.2	13.6	17.3	21.6	26.0	30.3	34.7	39.1	43.3	47.1	50.0	51.8
60	0.00	0.00	0.00	0.00	1.31	3.32	5.42	7.97	10.6	13.5	16.8	20.3	23.5	26.6	29.6	32.8	35.3	37.3	38.4
65	0.00	0.00	0.00	0.00	0.65	1.93	3.79	5.91	8.18	10.6	13.2	16.0	18.7	21.4	23.9	26.3	28.3	29.9	30.8
70	0.00	0.00	0.00	0.00	0.00	0.55	2.16	3.85	5.71	7.61	9.63	11.7	14.0	16.2	18.2	19.9	21.3	22.5	23.2
75	0.00	0.00	0.00	0.00	0.00	0.27	1.08	1.93	3.11	4.74	6.40	8.19	10.2	12.2	14.0	15.4	16.2	16.7	17.0
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	1.86	3.17	4.65	6.37	8.20	9.90	10.9	11.1	10.8	10.8
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-10

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.8V I:0.2858A P:60.15W PF:0.9571 Lamp Flux:5630.87x1 lm		
NAME: 8.01.020.0018 20x40° LWW-OP-D80-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090052
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	8.47	9.53	10.3	10.1	9.18	7.86	6.50	5.20	4.05	2.95	1.87	1.22	0.46	0.00	0.00	0.00	0.00	0.00	
-75	14.6	15.0	15.1	14.6	13.4	12.0	10.5	8.91	7.46	6.08	4.40	3.12	1.97	1.04	0.38	0.00	0.00	0.00	
-70	20.6	20.5	19.9	19.0	17.7	16.2	14.4	12.6	10.9	9.20	6.93	5.02	3.49	2.08	0.77	0.00	0.00	0.00	
-65	27.7	27.3	26.3	25.0	23.3	21.4	19.2	17.0	14.6	12.4	9.45	6.81	4.92	3.19	1.47	0.29	0.00	0.00	
-60	34.7	34.1	32.8	30.9	28.8	26.6	24.0	21.3	18.4	15.5	12.0	8.60	6.35	4.30	2.17	0.59	0.00	0.00	
-55	46.3	45.4	43.6	41.0	38.0	34.7	31.1	27.5	23.2	19.2	15.1	11.0	7.83	5.40	3.00	1.06	0.00	0.00	
-50	57.9	56.7	54.4	51.0	47.2	42.8	38.2	33.6	27.9	22.8	18.2	13.4	9.30	6.50	3.82	1.53	0.00	0.00	
-45	90.6	85.8	78.1	69.8	61.7	53.7	46.4	39.9	33.2	26.9	21.3	16.1	11.3	7.37	4.44	1.88	0.00	0.00	
-40	123	115	102	88.6	76.2	64.6	54.7	46.3	38.4	31.0	24.4	18.7	13.2	8.25	5.05	2.23	0.00	0.00	
-35	200	176	143	115	93.9	76.7	63.2	52.5	43.3	35.1	27.4	20.8	15.0	9.83	5.73	2.60	0.03	0.00	
-30	276	236	184	142	112	88.8	71.7	58.7	48.2	39.1	30.4	22.8	16.7	11.4	6.41	2.97	0.06	0.00	
-25	401	328	241	176	133	102	80.0	64.1	51.8	41.7	32.6	24.5	17.9	12.4	7.59	3.39	0.08	0.00	
-20	526	421	298	209	154	115	88.4	69.6	55.4	44.4	34.9	26.2	19.0	13.4	8.76	3.82	0.10	0.00	
-15	663	520	354	239	170	126	95.6	74.2	58.5	46.7	36.7	27.4	19.8	13.9	9.13	4.46	0.45	0.00	
-10	800	619	411	269	187	136	103	78.8	61.7	49.0	38.6	28.7	20.5	14.4	9.51	5.10	0.79	0.00	
-5	880	671	439	285	196	141	105	80.5	62.6	49.6	39.0	29.1	20.8	14.6	9.52	5.10	0.88	0.00	
0	959	724	468	300	204	146	108	82.2	63.5	50.2	39.3	29.5	21.1	14.7	9.54	5.10	0.96	0.00	
5	912	692	451	289	198	142	106	80.9	62.7	49.5	38.9	29.0	20.8	14.5	9.45	5.04	0.95	0.00	
10	864	661	433	279	192	139	104	79.6	61.9	48.8	38.4	28.6	20.4	14.3	9.37	4.98	0.94	0.00	
15	731	563	378	250	176	128	97.2	75.3	59.0	46.8	36.7	27.4	19.7	13.7	8.99	4.73	0.80	0.00	
20	598	466	322	221	159	118	90.6	70.9	56.1	44.8	35.1	26.3	18.9	13.2	8.61	4.48	0.66	0.00	
25	459	366	261	186	138	105	82.3	65.4	52.5	42.1	32.8	24.6	17.8	12.6	8.19	4.21	0.55	0.00	
30	320	265	201	151	117	92.4	73.9	59.9	48.8	39.3	30.6	23.0	16.8	11.9	7.77	3.93	0.45	0.00	
35	230	196	155	122	97.5	79.0	64.5	53.1	43.6	35.3	27.6	20.9	15.4	10.9	7.04	3.44	0.23	0.00	
40	141	128	110	92.6	77.9	65.5	55.1	46.2	38.3	31.2	24.6	18.8	14.0	9.88	6.30	2.95	0.01	0.00	
45	103	95.4	84.6	73.7	63.7	54.7	46.7	39.7	33.0	26.9	21.2	16.4	12.3	8.70	5.44	2.43	0.00	0.00	
50	65.2	63.1	59.6	54.8	49.6	43.9	38.3	33.2	27.7	22.6	17.9	13.9	10.6	7.53	4.57	1.92	0.00	0.00	
55	51.9	50.5	47.9	44.4	40.5	36.2	31.7	27.4	23.0	18.8	14.9	11.7	8.89	6.17	3.63	1.36	0.00	0.00	
60	38.6	37.8	36.3	34.1	31.5	28.5	25.1	21.7	18.2	15.0	12.0	9.50	7.16	4.81	2.68	0.80	0.00	0.00	
65	31.0	30.4	29.3	27.6	25.5	23.2	20.5	17.7	14.8	12.2	9.75	7.63	5.61	3.63	1.87	0.40	0.00	0.00	
70	23.4	23.0	22.3	21.1	19.5	17.8	15.8	13.7	11.4	9.34	7.47	5.75	4.07	2.46	1.06	0.00	0.00	0.00	
75	17.4	17.6	17.6	16.8	15.5	13.8	12.0	10.2	8.36	6.66	5.13	3.77	2.47	1.27	0.53	0.00	0.00	0.00	
80	11.3	12.2	12.8	12.5	11.4	9.87	8.27	6.70	5.28	3.98	2.79	1.79	0.86	0.09	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-10

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: