


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		5774.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.6V x 38.4H
	At 50% of Imax	19.0V x 17.0H
	At 90% of Imax	6.1V x 6.2H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	652.1 lumens per klm.
	To 50% of Imax	268.5 lumens per klm.
	To 90% of Imax	24.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:1.522A P:36.54W PF:1.000 Freq:0Hz Lamp Flux:2919.22x1 lm		
NAME: 8.01.020.0020 20° LWW-OP-D80-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

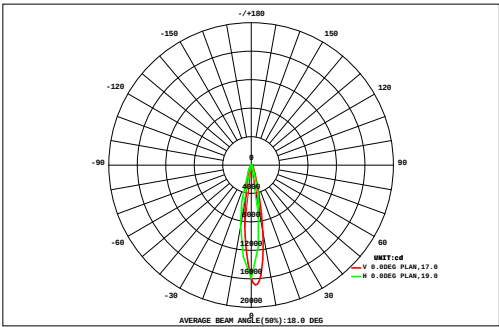

DATA OF LAMP		Eff:79.90lm/W	
MODEL LWW-OP-D80-L12-RDM	Imax(cd)	16856	
NOMINAL POWER(W)	36	AVAILABILITY(%)	66.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	1941
NOMINAL FLUX(lm)	2919.22	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2919
TEST VOLTAGE(V)	24	θ @50%(H,V)	17,19DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.76	0.92	1.10	1.32	1.56	1.80	2.02	2.19	2.26	2.22	2.08	1.87	1.63	1.39	1.16	0.97	0.81	0.69	26.8	0.00
	24	0.88	1.11	1.42	1.78	2.20	2.67	3.14	3.54	3.78	3.81	3.61	3.25	2.81	2.34	1.91	1.52	1.20	0.95	41.9	0.00
	21	1.15	1.49	1.91	2.41	2.99	3.59	4.15	4.57	4.74	4.62	4.24	3.72	3.13	2.56	2.04	1.60	1.24	0.96	51.1	9.14
	18	1.44	1.89	2.45	3.09	3.82	4.55	5.21	5.62	5.70	5.40	4.83	4.15	3.40	2.73	2.13	1.64	1.24	0.95	60.2	28.4
	15	1.40	1.89	2.56	3.47	4.80	7.12	10.6	14.4	17.1	17.4	15.2	11.5	7.97	5.39	3.90	2.91	2.17	1.61	131	110
	12	1.71	2.33	3.20	4.43	6.46	10.0	15.0	20.1	23.2	22.7	18.9	13.8	9.20	6.14	4.42	3.26	2.41	1.77	169	150
	9	2.41	3.31	4.57	6.42	9.86	15.6	22.6	28.2	29.8	26.4	19.8	13.2	8.15	5.56	4.07	2.96	2.16	1.56	207	190
	6	2.19	3.01	4.16	5.88	9.19	15.1	23.1	31.1	35.8	34.4	27.7	19.4	12.2	7.55	5.14	3.69	2.67	1.93	244	228
	3	1.88	2.60	3.59	5.11	8.15	14.1	23.0	33.4	41.8	42.8	36.2	26.2	16.7	9.74	6.31	4.49	3.23	2.35	282	265
	0	2.92	4.07	5.75	9.28	16.4	26.9	38.7	48.2	49.2	40.9	29.1	18.2	10.3	6.46	4.56	3.25	2.36	1.68	318	304
	-3	2.83	3.93	5.53	8.84	15.5	25.3	36.3	45.2	46.4	38.8	27.8	17.5	10.1	6.39	4.52	3.23	2.35	1.68	302	287
	-6	1.61	2.17	2.90	3.58	4.64	7.21	11.8	17.8	23.8	26.0	23.0	17.5	11.8	7.54	5.11	3.71	2.70	1.99	175	155
-9	1.85	2.47	3.30	4.20	5.32	7.30	10.2	13.1	15.2	15.4	13.1	10.0	7.34	5.23	3.77	2.79	2.07	1.54	124	102	
-12	2.17	2.89	3.87	5.12	6.58	8.24	9.48	9.08	6.74	4.08	2.47	1.81	2.23	2.59	2.24	1.74	1.34	1.01	73.7	48.6	
-15	1.17	1.52	1.96	2.52	3.18	4.10	5.45	7.07	8.33	8.66	7.90	6.39	4.85	3.71	2.88	2.21	1.70	1.30	74.9	48.5	
-18	0.93	1.16	1.43	1.73	1.97	2.18	2.62	3.45	4.45	5.19	5.25	4.61	3.67	2.89	2.31	1.82	1.43	1.12	48.2	16.3	
-21	1.08	1.31	1.57	1.82	2.04	2.04	1.70	1.15	0.84	0.77	0.83	1.03	1.20	1.16	1.02	0.88	0.74	0.63	21.8	0.00	
-24	0.83	0.99	1.17	1.36	1.52	1.57	1.45	1.50	1.58	1.59	1.53	1.41	1.30	1.22	1.08	0.93	0.79	0.67	22.5	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)					6	9	12	15	18	21	24	27
Φ t	29.2	39.1	52.4	72.4	106	159	226	290	321	301	244	176	118	80.6	58.6	43.6	32.6	24.4	2373	---	
Φ a	0.00	3.18	15.6	45.0	82.7	140	211	276	308	288	228	157	97.8	57.4	27.1	3.20	0.00	0.00	---	1941	

one-half-peak spread: U:7.9,D:11.3 , L:8.9,R:8.3 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:1.522A P:36.54W PF:1.000 Freq:0Hz Lamp Flux:2919.22x1 lm		
NAME: 8.01.020.0020 20° LWW-OP-D80-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

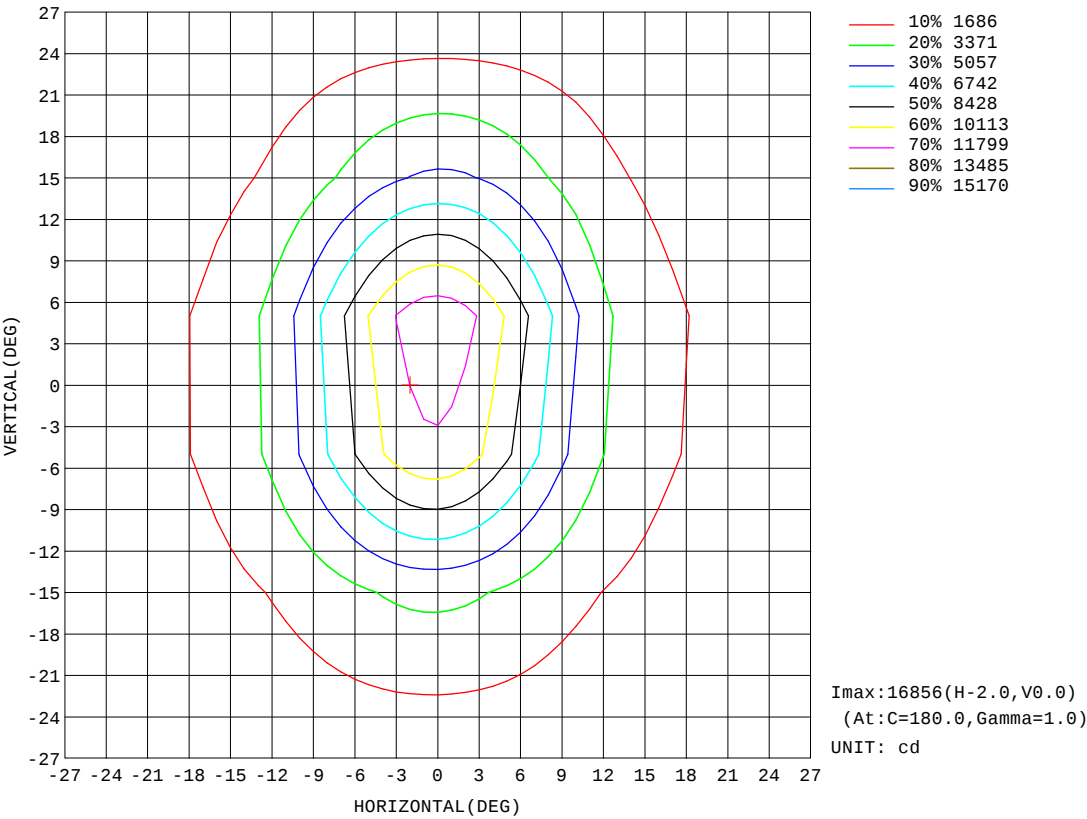


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:1.522A P:36.54W PF:1.000 Freq:0Hz Lamp Flux:2919.22x1 lm		
NAME: 8.01.020.0020 20° LWW-OP-D80-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

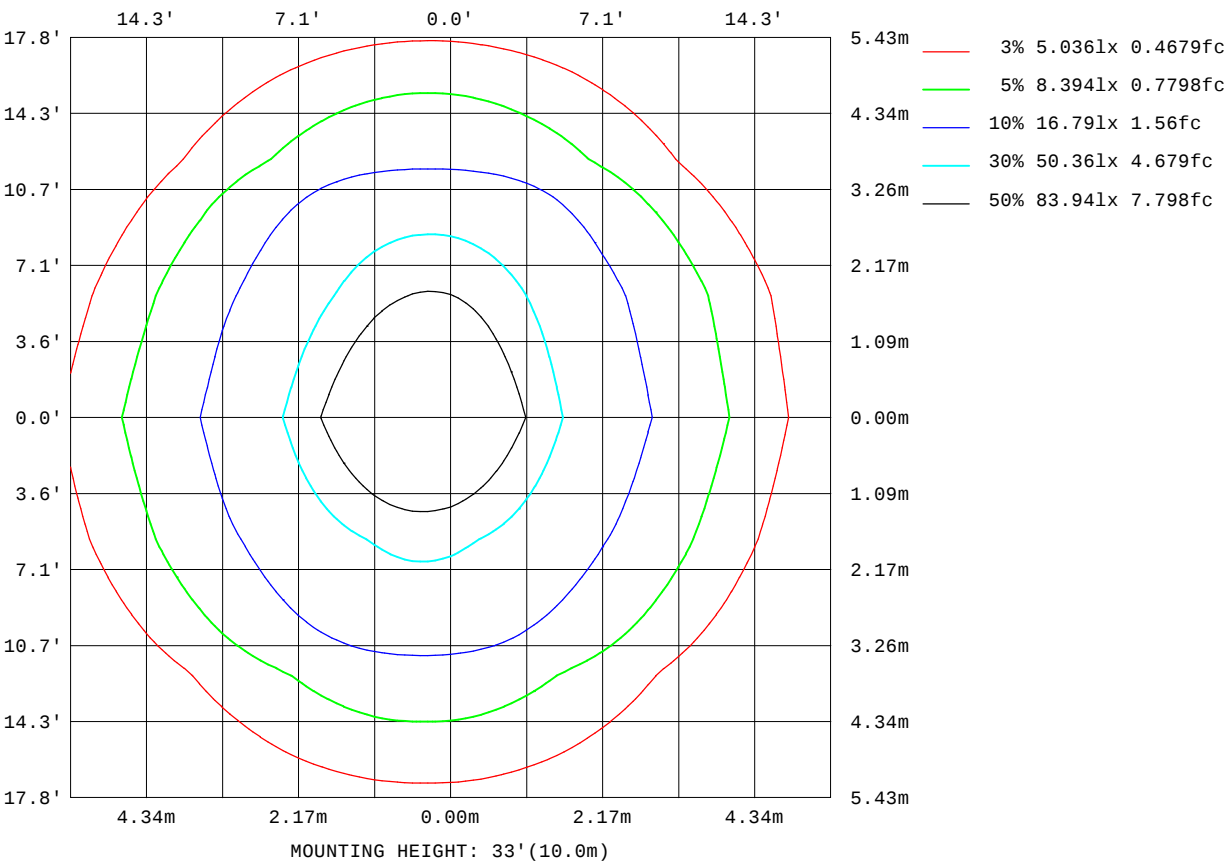

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

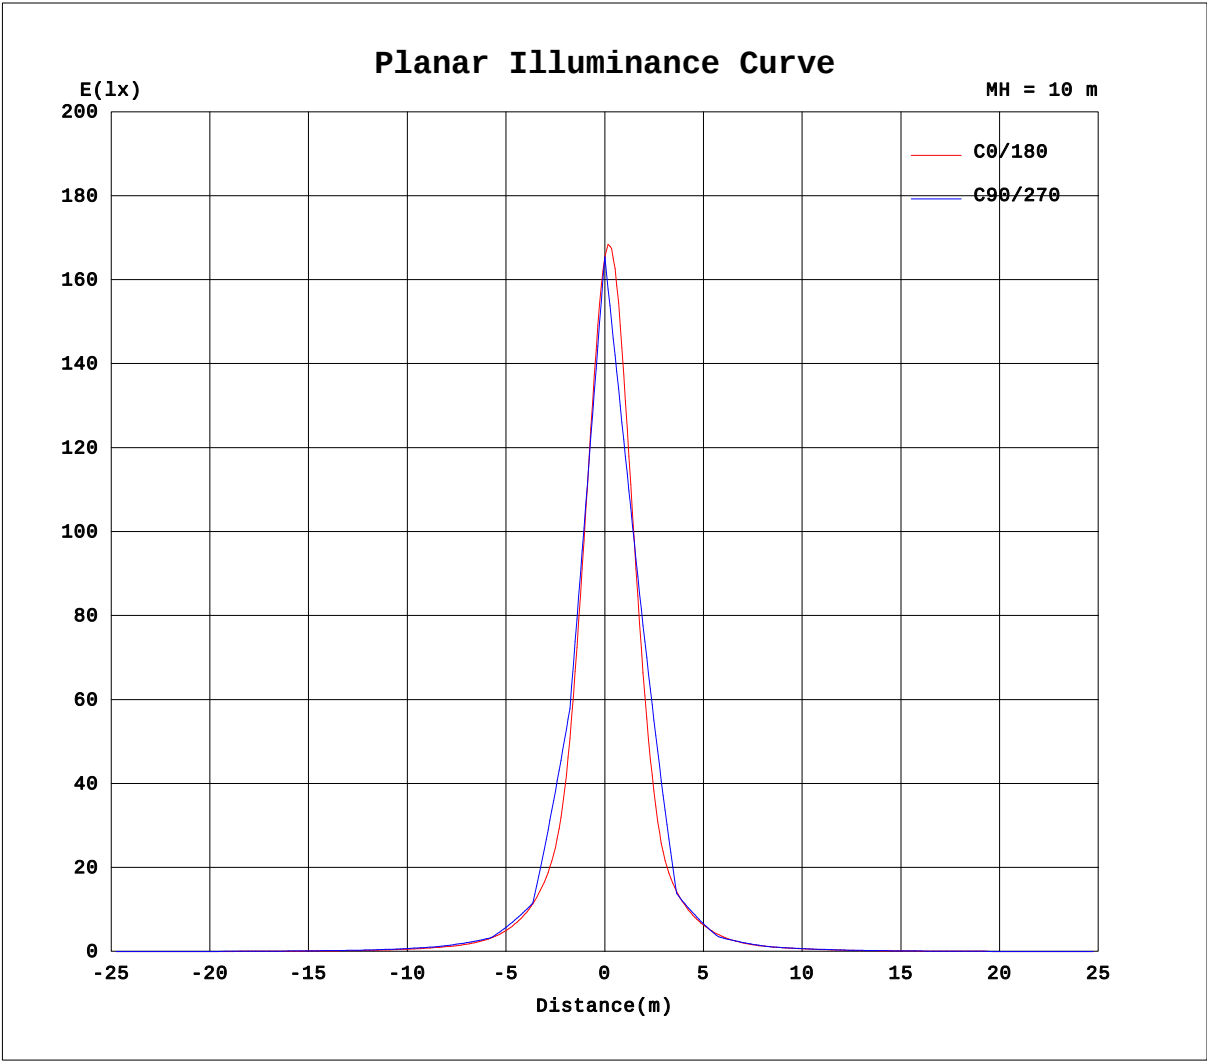


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:1.522A P:36.54W PF:1.000 Freq:0Hz Lamp Flux:2919.22x1 lm		
NAME: 8.01.020.0020 20° LWW-OP-D80-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

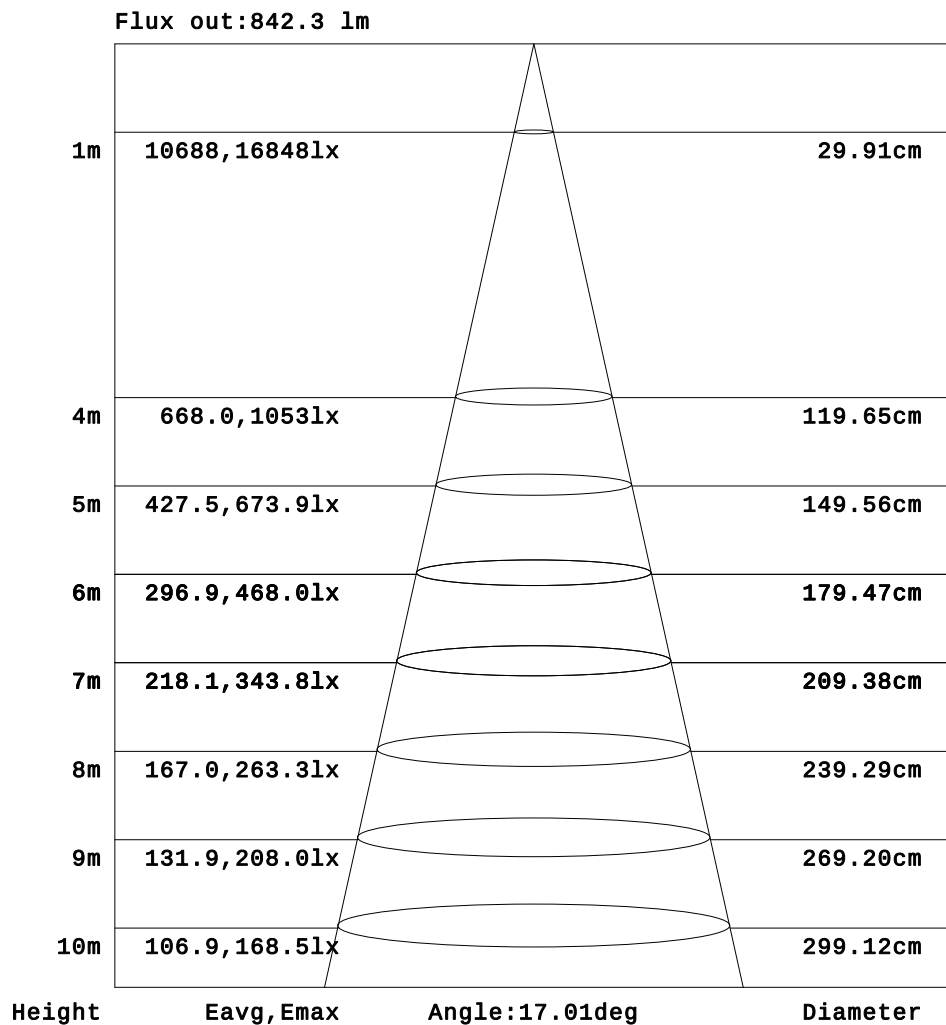

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.522A P:36.54W PF:1.000 Freq:0Hz Lamp Flux:2919.22x1 lm		
NAME: 8.01.020.0020 20° LWW-OP-D80-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1		UNIT: ×10cd																	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.26	0.39	0.46	0.40	0.34	0.26	0.14	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.02	0.31	0.76	1.35	1.73	1.88	2.14	2.21	2.16	2.20	2.22	2.03	1.98	2.06
-70	0.00	0.00	0.00	0.00	0.00	0.30	0.93	2.05	3.11	3.25	3.61	3.97	3.97	4.01	4.19	4.18	3.96	4.03	4.11
-65	0.00	0.00	0.00	0.00	0.23	0.76	1.38	2.39	3.65	4.49	4.80	5.45	5.86	5.97	6.20	6.49	6.48	6.54	6.71
-60	0.00	0.00	0.00	0.00	0.78	1.72	2.40	3.82	5.26	5.86	6.51	7.38	7.87	8.09	8.49	8.86	8.97	9.20	9.27
-55	0.00	0.00	0.00	0.07	0.76	2.04	2.93	4.05	5.53	6.70	7.45	8.59	9.48	10.1	10.7	11.3	11.8	12.1	12.4
-50	0.00	0.00	0.00	0.39	1.77	2.99	4.05	5.54	6.93	8.23	9.30	10.6	11.6	12.5	13.4	14.2	14.9	15.3	15.4
-45	0.00	0.00	0.00	0.30	1.53	3.04	4.41	5.75	7.24	8.59	9.95	11.7	13.4	15.0	16.8	18.3	19.7	21.0	21.5
-40	0.00	0.00	0.03	1.02	2.52	4.14	5.88	6.96	8.53	10.1	12.0	14.2	16.4	19.0	21.6	23.6	25.6	27.3	27.4
-35	0.00	0.00	0.00	0.86	2.42	4.27	5.81	7.32	8.81	10.6	12.9	15.7	18.6	21.7	25.6	29.8	34.0	37.7	39.2
-30	0.00	0.00	0.40	1.83	3.78	5.53	6.95	8.44	10.2	12.8	15.9	19.5	23.2	27.3	33.0	39.4	45.7	50.0	50.6
-25	0.00	0.00	0.12	2.02	3.50	5.34	6.95	8.66	10.6	13.2	16.7	20.8	26.0	34.1	45.5	60.1	76.9	90.9	95.5
-20	0.00	0.00	1.01	3.37	4.83	6.13	8.13	10.2	12.7	16.3	20.5	25.7	34.8	49.3	68.8	93.6	121	139	139
-15	0.00	0.00	0.71	3.00	4.46	6.00	7.76	9.81	12.4	16.2	20.9	27.2	38.4	58.1	88.4	135	214	326	378
-10	0.00	0.00	2.01	3.92	5.40	7.03	8.97	11.3	14.7	19.7	25.7	35.9	55.9	88.2	140	227	395	582	588
-5	0.00	0.00	1.19	3.32	4.89	6.52	8.30	10.4	13.4	18.1	23.8	33.0	51.2	83.7	136	239	510	926	1151
0	0.00	0.00	2.14	4.09	5.64	7.37	9.28	11.7	15.5	20.8	27.8	41.8	69.3	115	193	420	946	1557	1589
5	0.00	0.00	1.04	3.22	4.78	6.40	8.15	10.2	13.1	17.6	23.2	32.1	50.0	82.9	136	242	539	1015	1291
10	0.00	0.00	1.75	3.70	5.17	6.79	8.61	10.8	14.0	18.8	24.3	33.9	53.5	87.2	142	245	495	812	875
15	0.00	0.00	0.76	2.79	4.30	5.83	7.46	9.37	11.8	15.4	19.9	25.8	36.5	57.1	89.5	142	249	425	533
20	0.00	0.00	1.43	3.19	4.61	6.12	7.79	9.71	12.1	15.6	19.7	24.6	33.7	49.3	72.6	102	136	162	166
25	0.00	0.00	0.46	2.24	3.75	5.22	6.73	8.39	10.2	12.7	15.9	19.8	24.8	33.2	46.0	63.2	83.9	103	111
30	0.00	0.00	0.94	2.55	4.04	5.51	6.97	8.43	10.1	12.3	15.1	18.5	21.9	26.0	32.3	40.0	47.8	53.2	54.0
35	0.00	0.00	0.14	1.61	3.18	4.61	5.88	7.13	8.52	10.2	12.2	14.7	17.5	20.4	24.3	29.0	34.4	38.5	40.1
40	0.00	0.00	0.45	1.94	3.51	4.76	5.76	6.87	8.23	9.64	11.2	13.1	15.3	17.6	19.8	22.2	24.8	25.8	25.9
45	0.00	0.00	0.00	0.96	2.50	3.85	4.74	5.65	6.85	8.16	9.32	10.7	12.4	14.0	15.7	17.4	19.3	20.6	20.9
50	0.00	0.00	0.00	1.18	2.70	3.72	4.38	5.33	6.54	7.60	8.47	9.61	10.7	11.8	13.0	14.1	15.1	15.8	15.9
55	0.00	0.00	0.00	0.31	1.56	2.71	3.41	4.28	5.29	6.12	6.89	7.94	8.83	9.51	10.3	11.2	11.8	12.4	12.7
60	0.00	0.00	0.00	0.31	1.47	2.28	3.06	4.03	4.76	5.23	6.07	7.07	7.49	7.83	8.39	8.75	9.01	9.35	9.39
65	0.00	0.00	0.00	0.00	0.51	1.18	1.84	2.81	3.60	3.92	4.41	5.15	5.50	5.69	6.10	6.42	6.53	6.80	7.01
70	0.00	0.00	0.00	0.00	0.00	0.56	1.34	2.32	2.77	2.91	3.33	3.61	3.65	3.84	4.14	4.18	4.21	4.53	4.57
75	0.00	0.00	0.00	0.00	0.00	0.17	0.48	0.98	1.34	1.44	1.70	2.04	2.07	2.14	2.34	2.41	2.24	2.31	2.53
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.38	0.54	0.52	0.59	0.69	0.52	0.22	0.35	0.41
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.522A P:36.54W PF:1.000 Freq:0Hz Lamp Flux:2919.22x1 lm		
NAME: 8.01.020.0020 20° LWW-OP-D80-L12-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2024120079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	1.98	1.81	1.82	1.79	1.60	1.49	1.50	1.25	0.91	0.73	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	3.80	3.59	3.66	3.44	3.06	3.00	2.89	2.21	1.64	1.34	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	6.50	6.09	5.95	5.66	5.13	4.84	4.60	3.86	3.18	2.84	2.01	0.80	0.34	0.00	0.00	0.00	0.00	0.00	
-60	8.83	8.43	8.10	7.45	6.89	6.57	5.82	4.89	4.42	3.91	2.51	1.13	0.35	0.00	0.00	0.00	0.00	0.00	
-55	12.0	11.4	10.8	9.98	9.12	8.47	7.68	6.65	5.75	5.03	3.90	2.44	1.40	0.55	0.00	0.00	0.00	0.00	
-50	14.8	13.9	12.9	11.8	10.8	9.83	8.73	7.63	6.53	5.37	4.10	2.78	1.73	0.57	0.00	0.00	0.00	0.00	
-45	20.9	19.4	17.8	16.0	14.2	12.3	10.7	9.27	7.94	6.60	5.27	4.08	2.93	1.53	0.18	0.00	0.00	0.00	
-40	26.1	23.7	21.3	18.8	16.0	13.5	11.5	9.84	8.29	6.74	5.47	4.50	3.03	1.16	0.00	0.00	0.00	0.00	
-35	37.8	34.1	29.6	25.1	21.1	17.6	14.6	12.0	9.96	8.20	6.71	5.44	4.15	2.50	0.67	0.00	0.00	0.00	
-30	46.9	41.0	34.3	28.1	23.3	19.2	15.4	12.4	10.2	8.40	6.89	5.43	4.00	2.20	0.28	0.00	0.00	0.00	
-25	89.7	75.1	58.7	44.0	33.0	25.3	19.9	15.6	12.2	9.81	8.05	6.40	4.85	3.30	1.45	0.00	0.00	0.00	
-20	122	95.7	70.6	50.4	35.8	26.6	20.8	15.8	12.1	9.73	7.89	6.10	4.48	2.90	1.24	0.00	0.00	0.00	
-15	310	199	129	84.7	55.6	37.2	26.4	20.0	14.9	11.5	9.17	7.22	5.50	3.86	2.21	0.27	0.00	0.00	
-10	407	236	147	92.8	58.5	37.7	26.4	19.8	14.6	11.2	8.89	6.91	5.17	3.52	1.76	0.00	0.00	0.00	
-5	873	463	225	132	81.1	49.8	32.4	23.5	17.4	12.8	10.0	7.96	6.13	4.41	2.69	0.62	0.00	0.00	
0	996	443	212	124	74.7	45.3	30.1	21.9	16.0	11.9	9.47	7.49	5.66	3.96	2.08	0.00	0.00	0.00	
5	995	523	241	140	85.3	51.6	33.3	24.0	17.8	13.2	10.3	8.20	6.38	4.65	2.94	0.82	0.00	0.00	
10	603	307	169	105	64.5	40.3	27.6	20.8	15.4	11.7	9.35	7.41	5.67	4.03	2.23	0.05	0.00	0.00	
15	445	270	151	95.7	61.1	39.4	27.5	20.9	15.8	12.1	9.59	7.65	5.94	4.33	2.73	0.75	0.00	0.00	
20	144	112	80.3	55.2	37.5	27.2	21.4	16.7	12.8	10.2	8.25	6.48	4.89	3.38	1.76	0.00	0.00	0.00	
25	103	85.4	64.8	47.1	34.2	25.7	20.4	16.3	12.8	10.3	8.42	6.74	5.17	3.63	2.14	0.41	0.00	0.00	
30	49.4	42.0	34.2	27.6	23.0	19.4	16.1	12.9	10.5	8.77	7.26	5.71	4.20	2.67	1.21	0.00	0.00	0.00	
35	38.7	34.3	29.1	24.3	20.7	17.6	14.8	12.3	10.2	8.50	7.08	5.77	4.44	2.91	1.44	0.12	0.00	0.00	
40	25.0	22.4	20.1	17.9	15.8	13.5	11.5	9.88	8.44	7.04	5.86	4.79	3.51	1.95	0.51	0.00	0.00	0.00	
45	20.6	19.0	17.3	15.6	14.0	12.3	10.7	9.29	8.11	6.78	5.51	4.53	3.59	2.17	0.69	0.00	0.00	0.00	
50	15.2	14.2	13.2	12.0	10.9	9.81	8.67	7.76	6.73	5.43	4.31	3.58	2.62	1.16	0.00	0.00	0.00	0.00	
55	12.4	11.7	11.1	10.3	9.46	8.76	7.82	6.79	6.01	5.12	3.99	3.04	2.32	1.14	0.16	0.00	0.00	0.00	
60	9.05	8.79	8.43	7.83	7.45	7.04	6.11	5.19	4.63	3.92	2.82	1.94	1.16	0.05	0.00	0.00	0.00	0.00	
65	6.79	6.52	6.41	6.02	5.61	5.41	4.98	4.18	3.60	3.14	2.30	1.34	0.77	0.25	0.00	0.00	0.00	0.00	
70	4.25	4.18	4.14	3.81	3.58	3.55	3.23	2.63	2.24	1.78	0.97	0.16	0.00	0.00	0.00	0.00	0.00	0.00	
75	2.31	2.22	2.34	2.20	1.95	1.86	1.74	1.43	1.19	1.00	0.67	0.23	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.21	0.38	0.48	0.37	0.21	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-12-20

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: