

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5748.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	41.9V x 39.4H
	At 50% of Imax	18.4V x 18.3H
	At 90% of Imax	4.0V x 7.1H
Beam Flux	Total	996.7 lumens per klm.
	To 10% of Imax	725.8 lumens per klm.
	To 50% of Imax	319.4 lumens per klm.
	To 90% of Imax	33.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.1360A P:17.48W PF:0.5822 Lamp Flux:1035.38x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

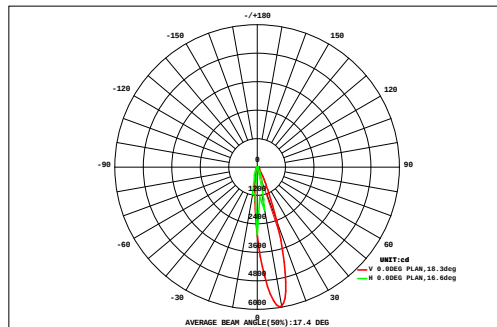

DATA OF LAMP		Eff:59.24lm/W	
MODEL	LWW-OP-D80-L6-RDM	Imax(cd)	5952
NOMINAL POWER(W)	18	AVAILABILITY(%)	75.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	782.0
NOMINAL FLUX(lm)	1035.38	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1035
TEST VOLTAGE(V)	220.7	θ @50%(H,V)	18,18DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
27	0.13	0.16	0.19	0.23	0.28	0.35	0.44	0.56	0.68	0.80	0.92	1.01	1.06	1.05	0.99	0.88	0.74	0.61	11.1	0.00
24	0.11	0.13	0.16	0.20	0.26	0.34	0.45	0.61	0.82	1.07	1.34	1.59	1.79	1.88	1.83	1.66	1.42	1.15	16.8	7.76
21	0.15	0.19	0.24	0.31	0.42	0.57	0.78	1.04	1.36	1.70	2.02	2.26	2.35	2.28	2.06	1.75	1.41	1.09	22.0	14.4
18	0.20	0.25	0.32	0.43	0.60	0.83	1.14	1.52	1.96	2.38	2.75	2.96	2.93	2.67	2.25	1.79	1.35	1.00	27.3	20.4
15	0.14	0.17	0.22	0.28	0.39	0.56	0.82	1.20	1.76	2.66	3.96	5.47	6.70	7.20	6.76	5.56	4.09	2.81	50.8	46.5
12	0.16	0.20	0.27	0.37	0.53	0.79	1.18	1.77	2.72	4.17	6.02	7.85	9.03	9.09	8.05	6.29	4.47	3.01	66.0	62.1
9	0.25	0.33	0.47	0.69	1.03	1.55	2.31	3.43	5.36	7.96	10.6	12.1	12.0	10.1	7.34	4.73	2.89	1.85	84.9	81.3
6	0.20	0.25	0.35	0.49	0.72	1.09	1.63	2.44	3.76	5.87	8.56	11.2	12.9	12.8	11.1	8.39	5.65	3.56	91.0	87.1
3	0.14	0.17	0.20	0.25	0.35	0.52	0.79	1.21	1.79	3.24	5.97	9.88	13.6	15.7	15.3	12.5	8.79	5.50	95.9	91.8
0	0.26	0.34	0.49	0.74	1.14	1.74	2.64	4.30	7.24	11.2	15.2	17.5	17.1	14.1	9.83	5.97	3.37	1.95	115	111
-3	0.24	0.33	0.46	0.70	1.06	1.62	2.45	3.98	6.67	10.3	14.0	16.1	15.9	13.2	9.33	5.77	3.33	1.97	107	103
-6	0.13	0.15	0.18	0.20	0.26	0.36	0.50	0.58	0.63	1.03	2.18	4.51	7.21	9.25	9.68	8.35	6.17	4.07	55.4	51.7
-9	0.17	0.21	0.27	0.36	0.49	0.68	0.96	1.34	1.86	2.48	3.04	3.84	4.82	5.32	5.13	4.31	3.24	2.27	40.8	36.5
-12	0.22	0.28	0.38	0.55	0.79	1.11	1.57	2.17	2.92	3.66	4.01	3.66	2.56	1.20	0.44	0.21	0.17	0.24	26.2	20.6
-15	0.12	0.14	0.17	0.20	0.24	0.32	0.42	0.57	0.76	1.02	1.43	1.97	2.57	2.99	3.03	2.69	2.16	1.62	22.4	17.2
-18	0.11	0.12	0.14	0.15	0.17	0.20	0.23	0.29	0.35	0.40	0.51	0.79	1.30	1.80	2.07	1.98	1.67	1.29	13.6	7.83
-21	0.15	0.18	0.22	0.28	0.35	0.45	0.55	0.66	0.76	0.80	0.75	0.58	0.38	0.28	0.21	0.19	0.19	0.19	7.19	0.00
-24	0.11	0.14	0.16	0.20	0.24	0.29	0.35	0.42	0.48	0.52	0.51	0.47	0.50	0.53	0.53	0.50	0.45	0.38	6.77	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	2.96	3.74	4.87	6.62	9.31	13.3	19.2	28.1	41.9	61.3	83.7	104	115	112	96.0	73.5	51.6	34.5	860	---
Φ a	0.00	0.00	0.00	0.00	0.18	3.84	9.55	18.2	35.2	55.9	78.2	99.5	111	109	93.5	70.8	46.1	28.2	---	760

one-half-peak spread: U:6.2,D:12.4 , L:8.8,R:9.7


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.7V I:0.1360A P:17.48W PF:0.5822 Lamp Flux:1035.38x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

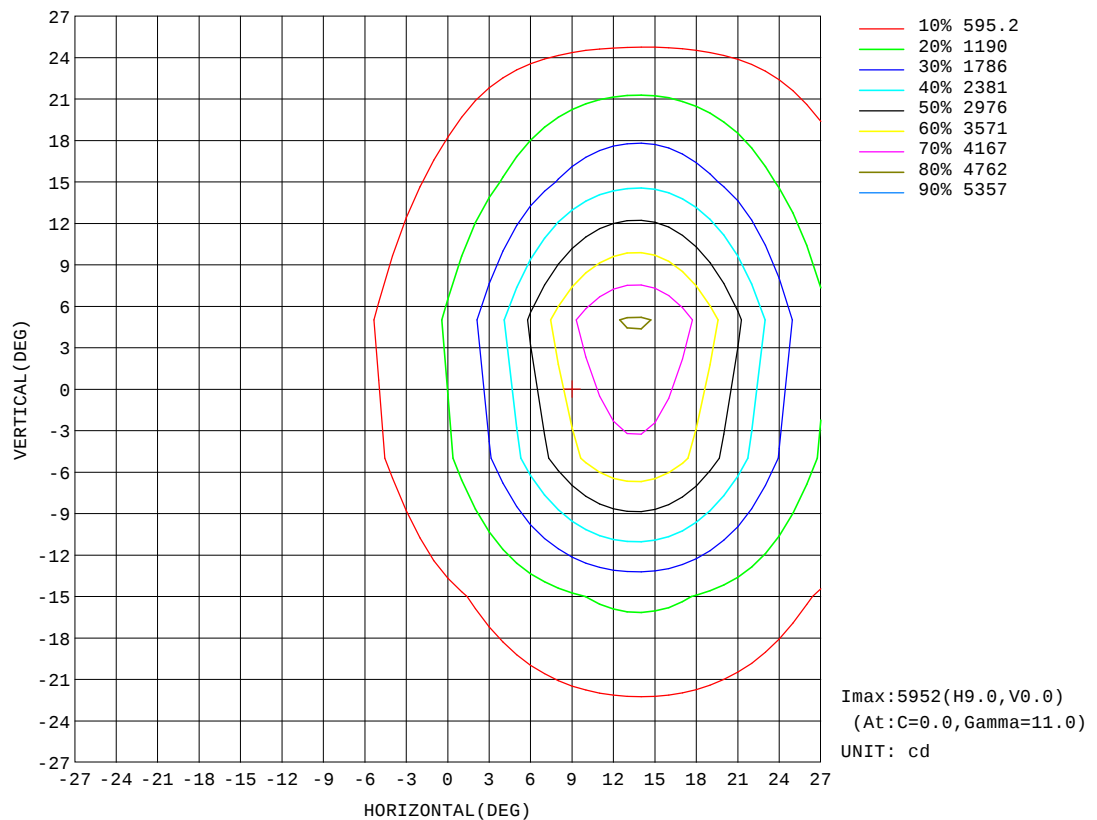


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.7V I:0.1360A P:17.48W PF:0.5822 Lamp Flux:1035.38x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

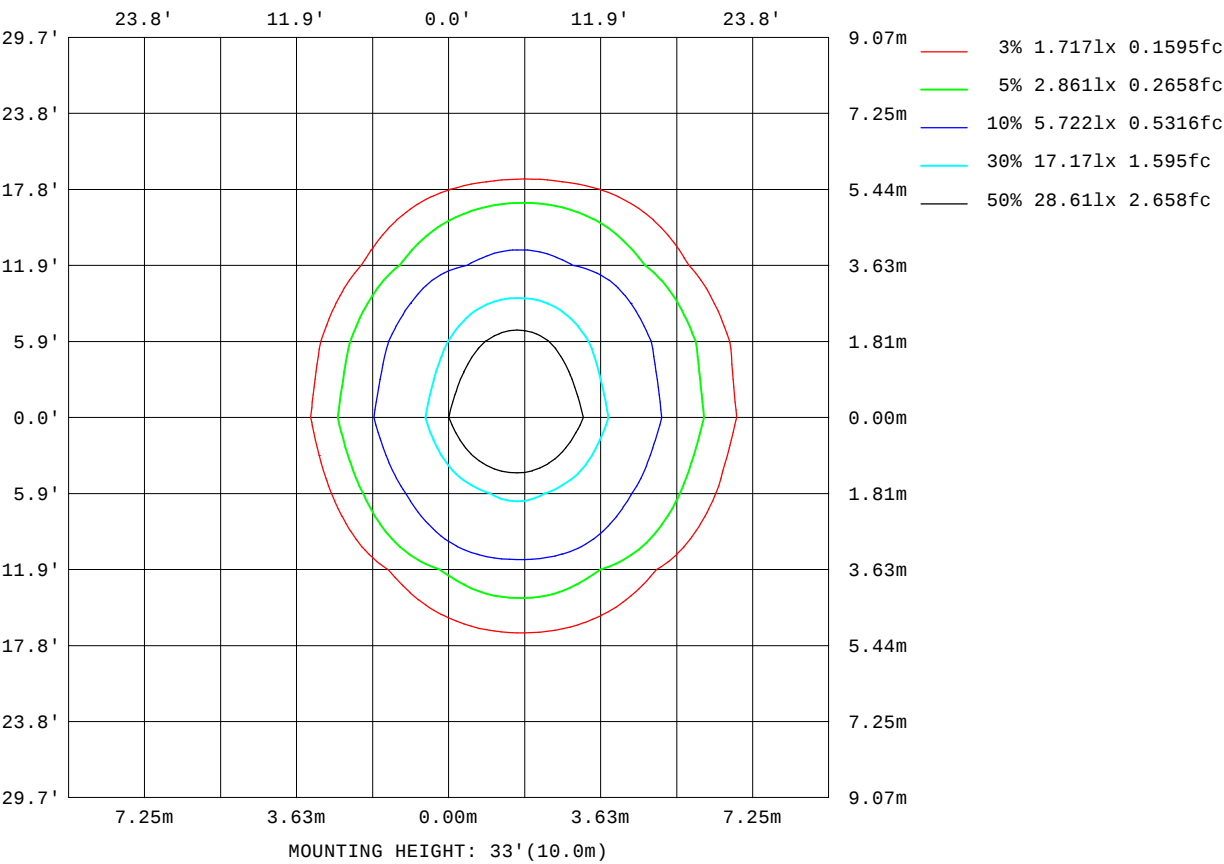


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.7V I:0.1360A P:17.48W PF:0.5822 Lamp Flux:1035.38x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

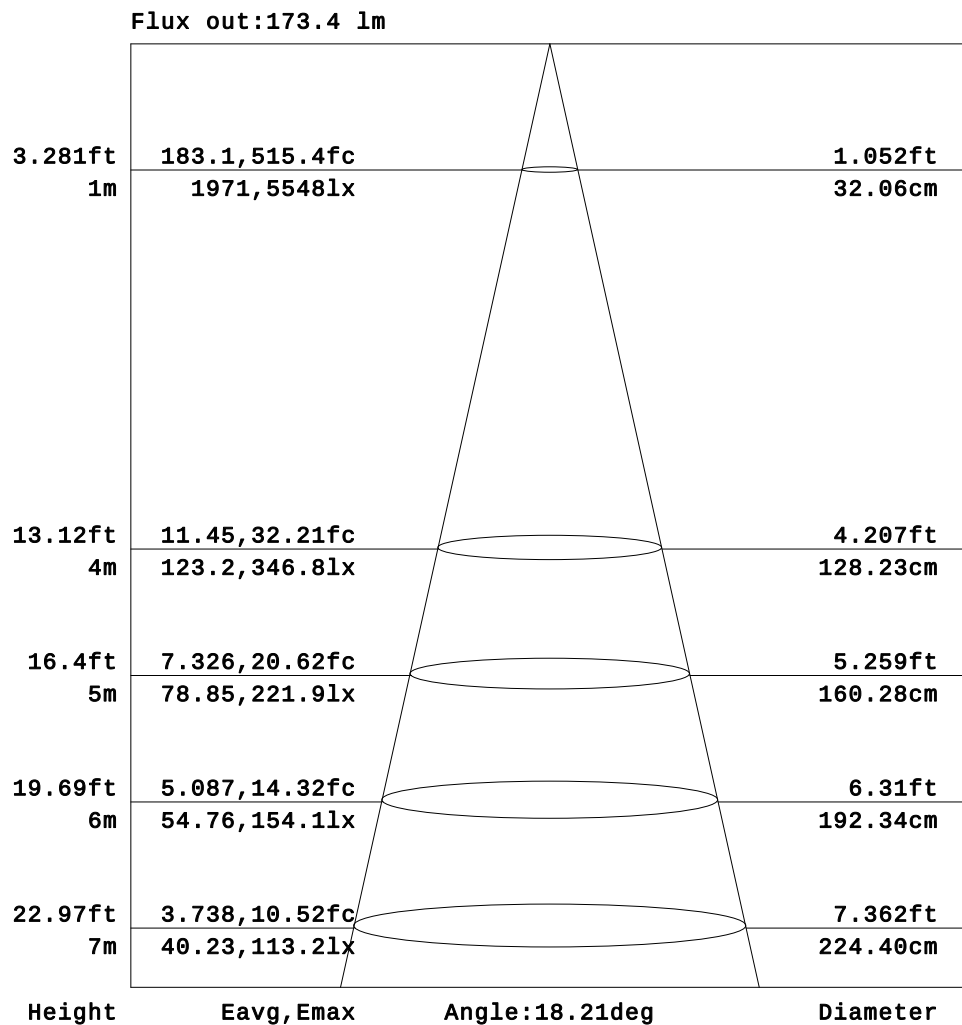


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

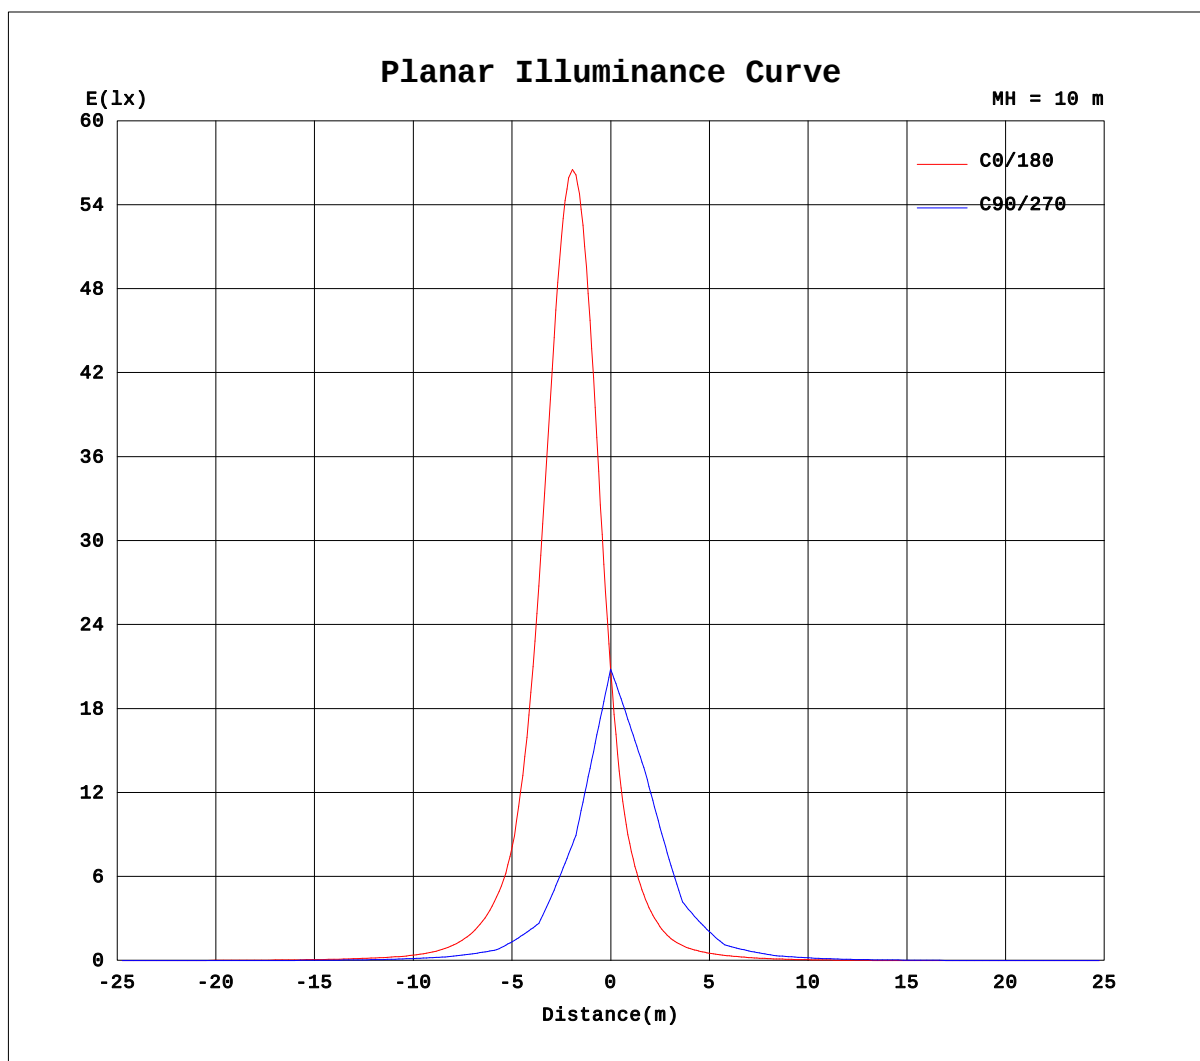

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 30.5DEG
Operators: QC1
Test Date: 2024-04-17

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 70%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.1360A P:17.48W PF:0.5822 Lamp Flux:1035.38x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	1.59	3.02	4.24	5.17	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	2.69	5.46	8.07	9.95	12.0	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	1.65	3.13	4.95	7.38	9.97	13.2	16.4	19.0	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	2.72	5.60	9.14	12.9	16.1	19.6	23.6	27.1	30.3	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	3.76	7.41	11.2	15.4	20.0	24.7	30.3	36.3	42.0	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.78	6.02	10.6	15.1	19.8	25.2	31.4	38.6	46.6	54.6	63.3	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	1.84	5.27	9.92	15.0	20.6	27.1	35.1	44.2	54.9	67.9	83.2	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.91	7.07	11.9	17.3	23.8	31.5	41.5	53.1	66.6	83.6	105	130	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.87	5.31	10.3	15.8	22.2	30.6	41.2	54.2	71.4	97.8	139	195	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.71	5.83	11.5	17.4	24.3	33.7	46.3	61.2	81.7	116	175	260	363	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.69	8.18	14.0	20.6	29.1	40.9	56.0	76.5	112	182	308	516	
-10	0.00	0.00	0.00	0.00	0.00	0.00	2.71	8.25	14.2	21.1	30.0	42.8	59.1	82.1	124	212	379	674	1172	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.12	4.48	10.2	16.4	23.8	34.0	48.6	67.9	98.2	159	295	560	1121	
0	0.00	0.00	0.00	0.00	0.00	0.00	4.17	9.84	16.0	23.2	33.3	48.0	68.0	99.1	161	308	605	1252	2847	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.12	4.56	10.4	16.7	24.1	34.6	49.7	69.9	102	170	320	622	1271	
10	0.00	0.00	0.00	0.00	0.00	0.00	2.82	8.58	14.7	21.7	31.1	44.7	62.6	88.9	142	255	485	920	1850	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	8.65	14.7	21.4	30.3	43.1	59.9	83.9	130	226	409	740	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.98	6.38	12.2	18.2	25.5	35.8	49.7	67.2	94.6	147	241	391	586	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.13	5.96	11.2	16.6	23.4	32.5	44.5	59.8	83.0	123	191	293	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.55	8.03	12.7	18.2	25.0	33.9	45.5	60.0	79.1	108	148	192	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	2.24	6.13	10.7	15.9	21.7	29.2	38.7	50.6	66.1	87.8	116	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.49	6.78	11.3	16.0	21.2	27.8	36.0	46.1	57.9	71.1	83.9	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	1.65	4.42	8.20	12.1	16.9	22.3	28.8	36.6	45.5	54.7	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	3.56	6.57	10.4	14.6	18.7	23.7	29.5	34.7	39.9	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	2.06	3.63	6.08	9.27	12.8	17.0	21.3	25.2	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	2.69	5.30	8.53	11.5	14.0	16.7	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	1.58	2.95	4.61	5.99	7.31	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.1360A P:17.48W PF:0.5822 Lamp Flux:1035.38x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2										UNIT: cd									
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.01	0.40	0.27	0.43	0.77	0.58	0.42	0.65	0.24	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.76	0.59	0.72	1.45	1.31	0.81	1.27	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	6.22	6.91	7.06	7.26	7.65	6.96	6.72	6.60	5.59	4.78	4.49	3.09	1.93	1.40	0.04	0.00	0.00	0.00	
-60	13.7	14.1	14.4	14.6	13.6	12.7	11.9	10.4	8.91	7.97	6.11	4.16	3.02	0.65	0.00	0.00	0.00	0.00	
-55	21.7	23.7	24.1	24.0	23.3	21.4	19.5	17.5	15.1	13.0	11.1	8.62	6.45	4.78	1.95	0.00	0.00	0.00	
-50	33.2	33.9	33.6	32.5	30.0	27.0	23.9	20.8	17.9	15.2	12.1	9.47	7.21	4.51	0.00	0.00	0.00	0.00	
-45	47.8	52.1	53.1	51.4	47.5	42.8	37.5	32.3	27.1	22.5	18.5	14.7	11.6	8.53	4.99	0.70	0.00	0.00	
-40	69.8	72.0	70.4	64.2	57.6	50.1	42.7	35.5	28.8	23.4	18.7	14.9	11.1	7.01	2.62	0.00	0.00	0.00	
-35	99.5	112	116	111	98.2	82.6	67.4	54.8	44.1	35.2	27.6	21.4	16.6	12.0	7.39	2.63	0.00	0.00	
-30	150	160	155	138	114	90.4	71.6	56.8	44.9	34.6	26.3	20.0	14.7	9.60	4.79	0.30	0.00	0.00	
-25	259	312	329	301	245	183	130	91.4	67.0	51.1	38.4	28.4	21.0	15.0	9.57	4.60	0.36	0.00	
-20	459	497	465	377	275	188	124	85.3	62.9	46.8	34.0	24.6	17.6	11.6	6.34	1.57	0.00	0.00	
-15	842	1193	1293	1037	679	424	257	153	97.5	68.1	49.4	35.3	25.0	17.6	11.5	6.04	1.13	0.00	
-10	1807	2111	1749	1115	659	380	215	126	82.6	58.7	41.7	29.0	20.4	13.6	7.85	2.55	0.00	0.00	
-5	2293	3654	3968	2882	1530	755	410	222	127	81.7	57.4	40.2	27.8	19.5	12.9	7.04	1.72	0.00	
0	5049	5951	4580	2417	1061	545	286	154	93.9	64.3	44.9	30.9	21.6	14.7	8.45	2.95	0.00	0.00	
5	2694	4355	4741	3424	1774	843	450	238	134	85.0	59.3	41.4	28.6	20.1	13.4	7.37	1.97	0.00	
10	3114	3675	2954	1704	870	475	256	143	90.1	62.9	44.3	30.6	21.5	14.7	8.57	3.10	0.00	0.00	
15	1364	2059	2244	1726	1021	569	327	186	112	75.6	54.3	38.5	27.0	19.1	12.7	6.96	1.79	0.00	
20	774	855	774	592	403	258	160	103	72.2	53.0	38.4	27.2	19.5	13.2	7.55	2.48	0.00	0.00	
25	413	519	550	488	375	263	175	116	80.9	60.0	44.6	32.5	23.7	16.9	11.1	5.89	1.22	0.00	
30	230	248	238	206	164	123	91.7	70.5	55.0	41.8	31.0	23.1	16.8	11.3	6.26	1.76	0.00	0.00	
35	143	165	173	163	141	115	90.1	70.6	55.8	44.0	33.9	25.7	19.5	14.0	9.05	4.39	0.53	0.00	
40	93.4	97.5	93.7	86.7	76.6	66.3	56.5	46.4	37.4	29.7	23.4	18.1	13.3	8.73	4.30	0.58	0.00	0.00	
45	63.4	70.2	71.7	68.7	64.3	57.4	50.3	43.2	36.1	29.6	23.9	18.9	14.7	10.7	6.63	2.59	0.07	0.00	
50	44.8	46.0	45.3	44.3	41.1	37.0	32.9	28.5	24.3	20.3	16.4	13.0	9.72	6.18	2.40	0.00	0.00	0.00	
55	29.1	32.1	32.9	32.8	32.2	30.1	27.6	24.8	21.6	18.7	15.7	12.4	9.71	7.15	4.10	0.87	0.00	0.00	
60	18.6	19.7	20.4	20.7	19.9	19.2	17.9	15.9	14.3	12.4	9.79	7.48	5.66	3.35	0.31	0.00	0.00	0.00	
65	9.10	10.5	11.5	12.4	12.8	12.5	12.4	11.7	10.5	9.54	8.32	6.27	4.50	3.35	1.43	0.02	0.00	0.00	
70	1.94	2.90	4.14	4.97	5.14	5.71	5.97	5.50	5.13	4.86	3.61	2.09	1.52	0.36	0.00	0.00	0.00	0.00	
75	0.49	1.06	1.56	2.17	2.52	2.61	2.92	2.95	2.68	2.56	2.35	1.64	0.95	0.71	0.04	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks: