

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5979.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	44.8V x 38.8H
	At 50% of Imax	20.8V x 18.4H
	At 90% of Imax	5.8V x 7.3H
Beam Flux	Total	997.4 lumens per klm.
	To 10% of Imax	788.5 lumens per klm.
	To 50% of Imax	366.1 lumens per klm.
	To 90% of Imax	40.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.0537A P:6.135W PF:0.5183 Lamp Flux:405.751x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000031
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

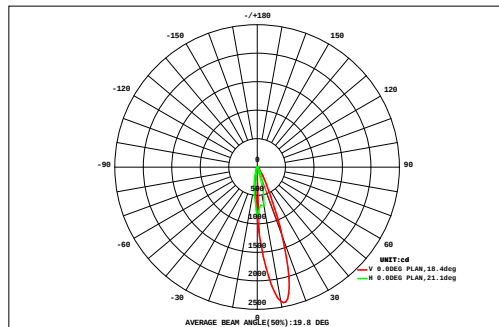

DATA OF LAMP		Eff:66.13lm/W	
MODEL	LWW-OP-D80-L6-RDM	Imax(cd)	2426
NOMINAL POWER(W)	6	AVAILABILITY(%)	80.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	325.5
NOMINAL FLUX(lm)	405.751	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	405.8
TEST VOLTAGE(V)	220.5	θ @50%(H,V)	18,21DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.03	0.04	0.06	0.08	0.11	0.15	0.20	0.27	0.35	0.43	0.50	0.56	0.59	0.59	0.55	0.49	0.41	0.32	5.71	1.47	
	24	0.03	0.04	0.06	0.09	0.13	0.19	0.26	0.37	0.49	0.64	0.79	0.93	1.01	1.03	0.95	0.82	0.67	0.52	9.02	6.44	
	21	0.04	0.06	0.08	0.11	0.17	0.25	0.35	0.49	0.66	0.85	1.04	1.21	1.29	1.28	1.15	0.97	0.77	0.59	11.3	9.10	
	18	0.05	0.07	0.10	0.14	0.21	0.31	0.45	0.62	0.83	1.06	1.29	1.49	1.57	1.53	1.35	1.12	0.87	0.65	13.7	11.8	
	15	0.04	0.06	0.09	0.13	0.21	0.32	0.48	0.71	1.05	1.57	2.23	2.88	3.31	3.35	3.00	2.34	1.66	1.10	24.5	23.0	
	12	0.05	0.07	0.10	0.16	0.24	0.38	0.58	0.87	1.33	2.03	2.92	3.78	4.30	4.30	3.76	2.86	1.96	1.26	31.0	29.6	
	9	0.06	0.09	0.13	0.21	0.33	0.51	0.78	1.17	1.81	2.77	3.92	4.92	5.37	5.16	4.29	3.10	2.02	1.25	37.9	36.5	
		0.06	0.08	0.12	0.18	0.28	0.44	0.68	1.04	1.63	2.60	3.85	5.05	5.74	5.69	4.88	3.61	2.36	1.44	39.7	38.3	
		0.05	0.07	0.10	0.14	0.23	0.36	0.56	0.87	1.40	2.35	3.67	5.07	6.02	6.18	5.46	4.13	2.72	1.63	41.0	39.5	
		0.06	0.09	0.13	0.19	0.31	0.48	0.76	1.19	2.01	3.32	4.90	6.26	6.85	6.47	5.20	3.58	2.18	1.24	45.2	43.8	
		0.06	0.08	0.12	0.18	0.28	0.44	0.70	1.09	1.84	3.03	4.46	5.71	6.26	5.92	4.75	3.28	1.99	1.15	41.3	40.0	
	-9	0.04	0.05	0.07	0.10	0.15	0.23	0.35	0.53	0.76	1.16	1.78	2.49	3.05	3.23	2.95	2.32	1.60	1.04	21.9	20.2	
	-12	0.04	0.05	0.07	0.10	0.14	0.21	0.32	0.46	0.62	0.84	1.17	1.53	1.80	1.85	1.66	1.31	0.96	0.68	13.8	11.6	
	-15	0.04	0.05	0.07	0.10	0.14	0.20	0.30	0.42	0.52	0.58	0.63	0.63	0.58	0.46	0.34	0.26	0.27	0.29	5.89	1.73	
	-18	0.03	0.04	0.05	0.07	0.09	0.13	0.18	0.25	0.35	0.46	0.62	0.80	0.93	0.97	0.90	0.74	0.56	0.41	7.55	4.53	
	-21	0.02	0.03	0.04	0.05	0.06	0.08	0.11	0.14	0.18	0.23	0.28	0.35	0.43	0.48	0.48	0.43	0.35	0.27	4.03	0.29	
	-24	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.09	0.07	0.05	0.04	0.04	0.04	0.05	0.06	0.07	1.07	0.00	
	-27	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.11	0.13	0.13	0.14	0.13	0.12	0.10	0.09	1.46	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	0.72	1.02	1.45	2.12	3.19	4.81	7.21	10.6	16.0	24.1	34.2	43.8	49.3	48.6	41.9	31.5	21.5	14.0	356	---		
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	2.48	6.89	13.0	21.9	32.8	42.6	48.1	47.7	40.9	30.4	19.7	11.3	---	318		

one-half-peak spread: U:7.0,D:14.0 , L:9.1,R:9.5


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.0537A P:6.135W PF:0.5183 Lamp Flux:405.75lx1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000031
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

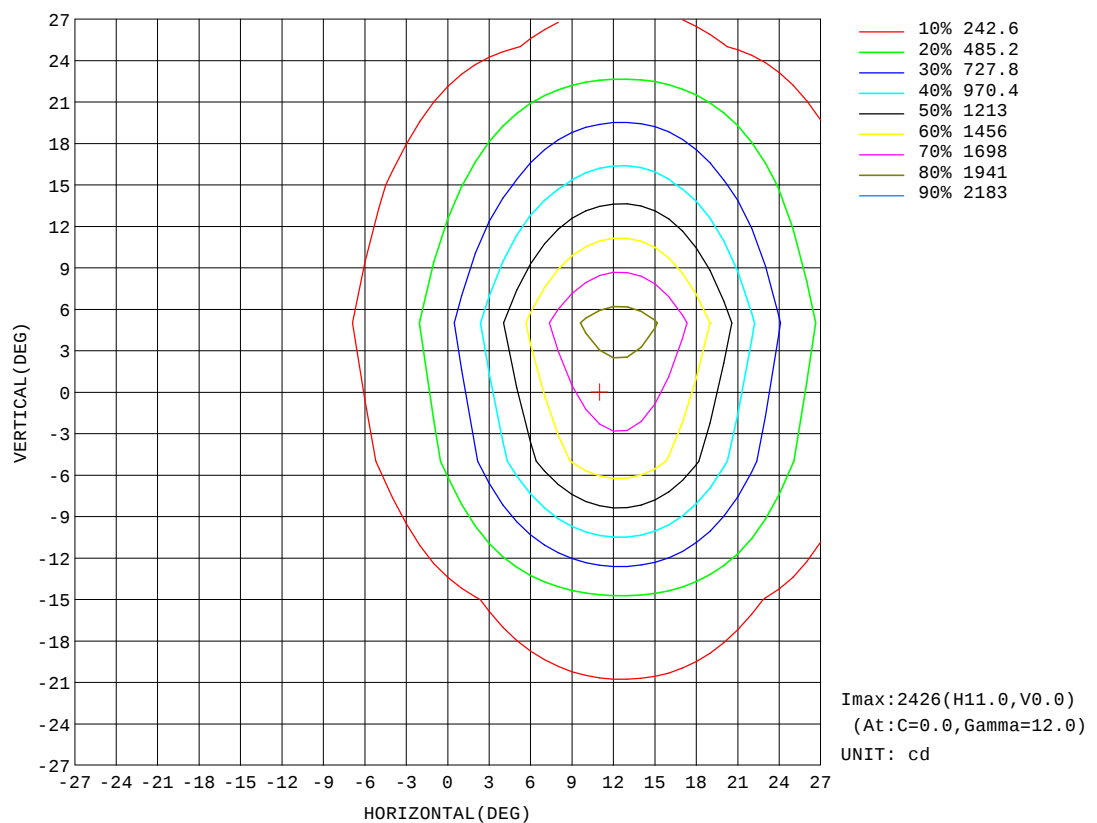


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.5V I:0.0537A P:6.135W PF:0.5183 Lamp Flux:405.751x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000031
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

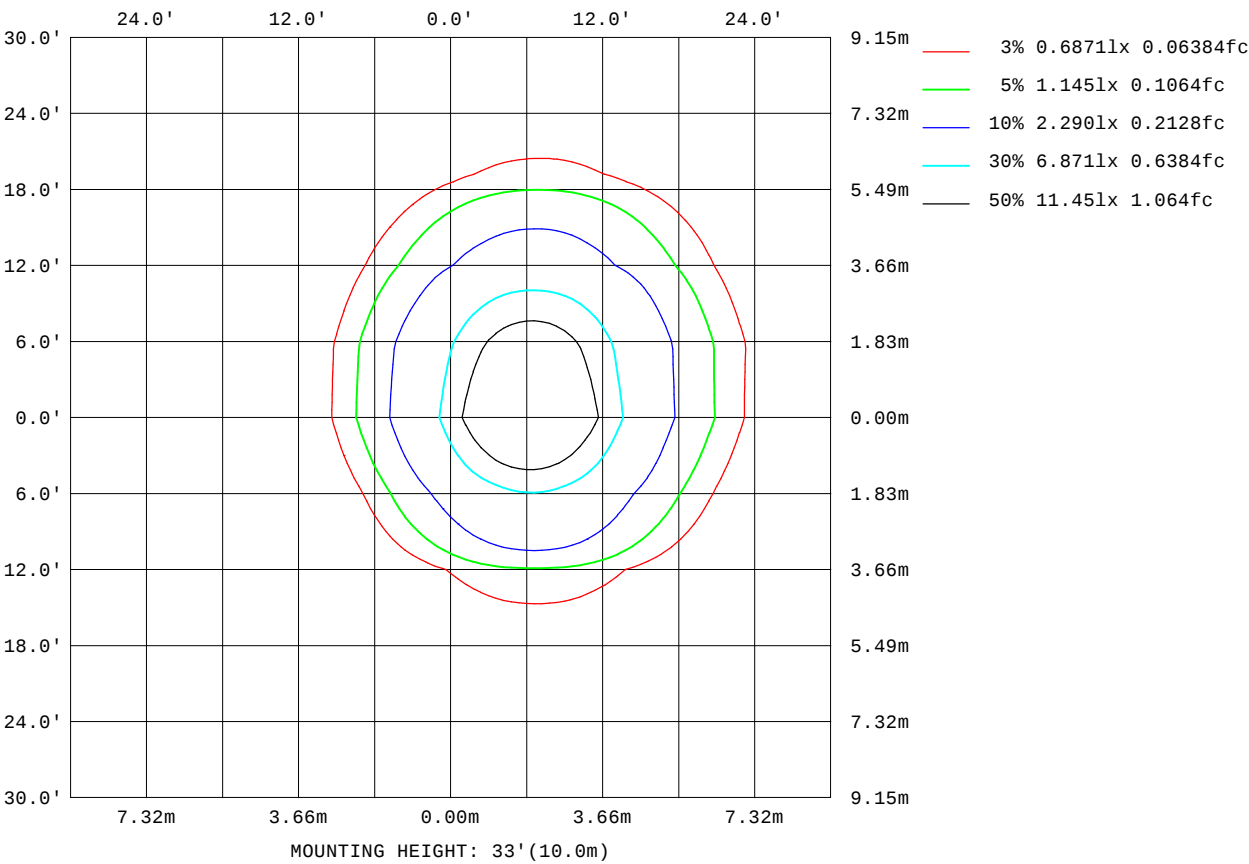


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.0537A P:6.135W PF:0.5183 Lamp Flux:405.751x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000031
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

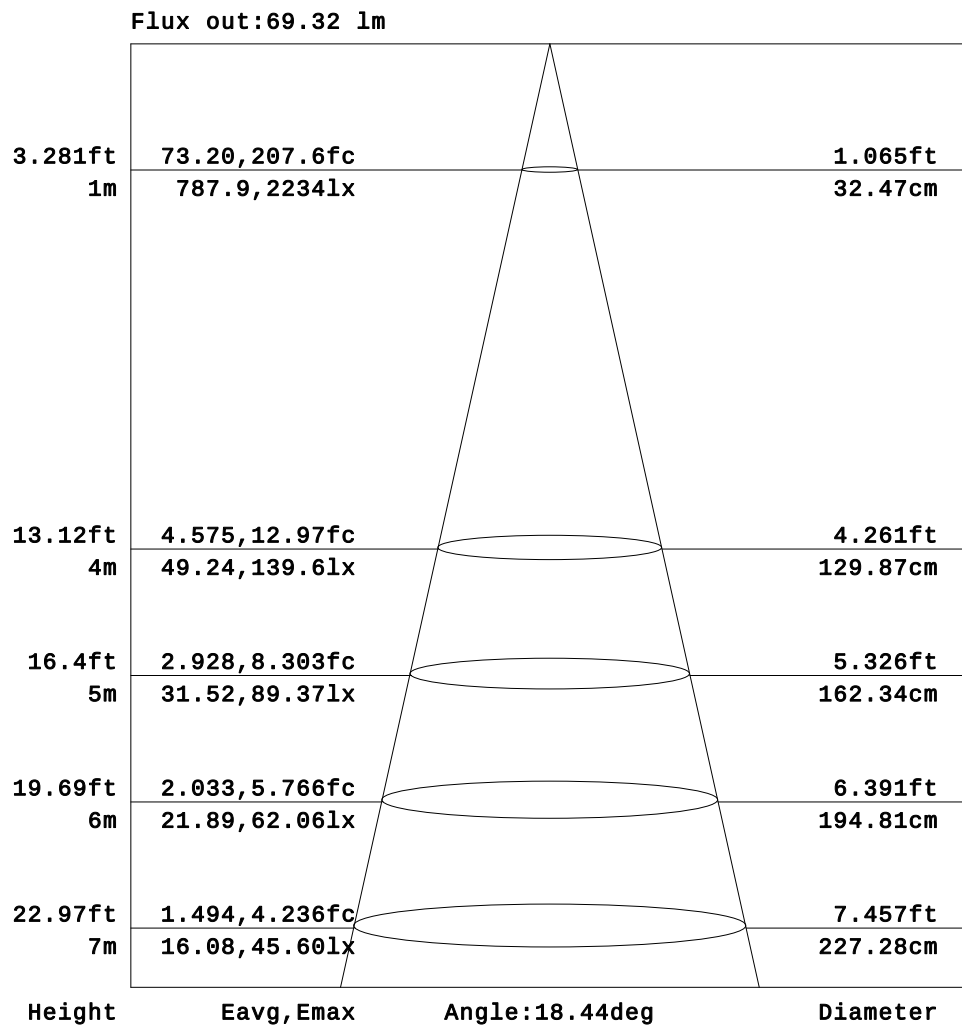


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

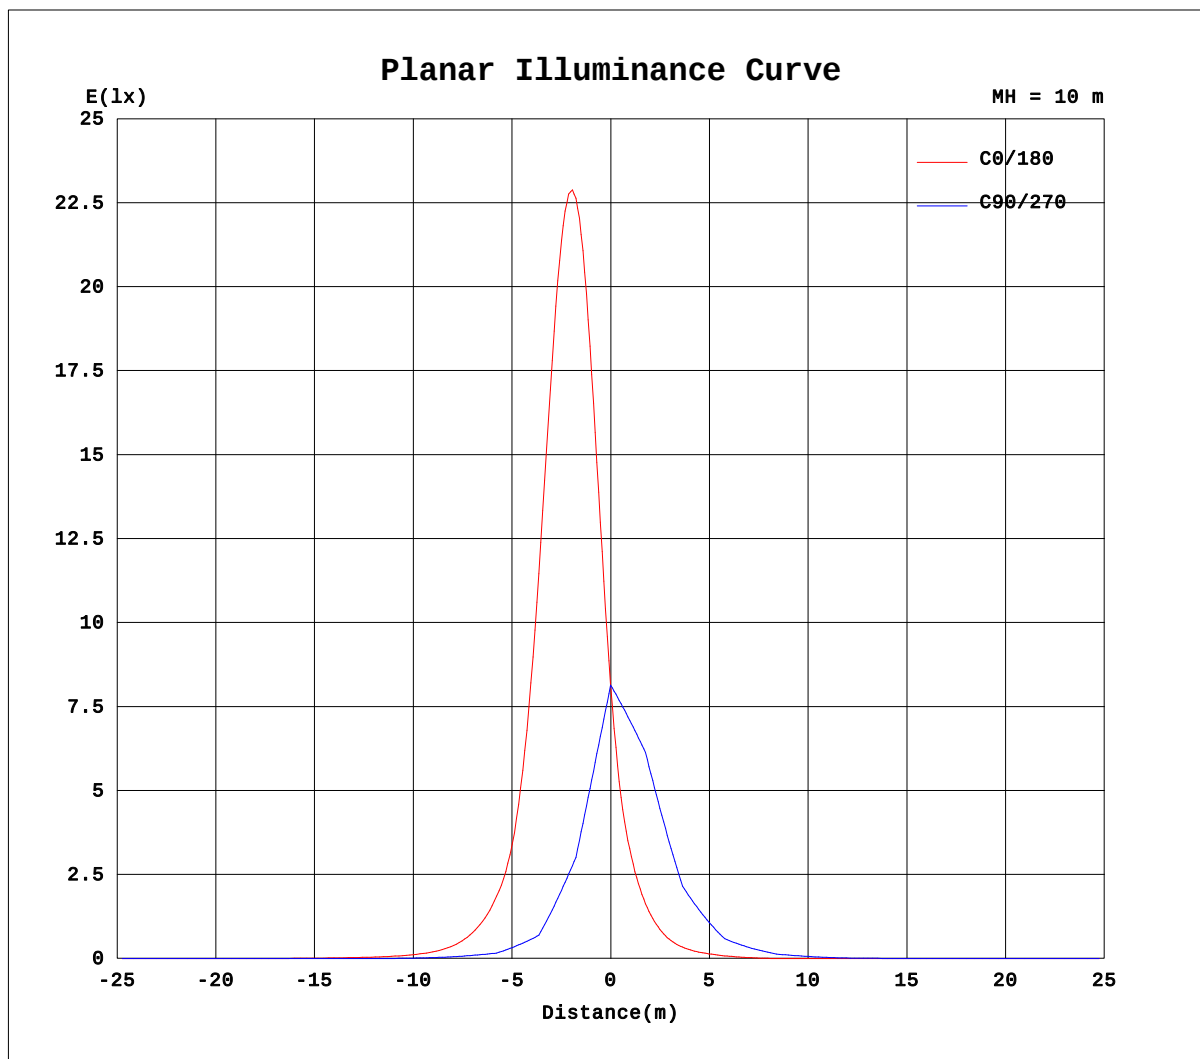

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 30.5DEG
Operators: QC1
Test Date: 2024-04-17

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 70%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.0537A P:6.135W PF:0.5183 Lamp Flux:405.751x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000031
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	1.11	2.40	3.68	4.94	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	2.73	5.27	7.87	10.3	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	1.44	3.39	6.40	9.86	13.6	17.6	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	3.58	7.46	11.4	15.9	20.9	26.7	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	2.23	6.18	10.9	16.7	25.1	37.2	53.4	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.02	5.42	10.5	16.4	24.9	38.4	59.3	87.0	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.86	6.77	12.7	20.7	34.3	60.6	110	190	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	4.48	10.3	17.6	29.1	51.7	98.0	188	334	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	4.35	10.7	19.1	32.7	61.1	123	249	524	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.19	6.56	14.1	24.8	44.2	88.7	185	383	887	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	5.04	12.1	21.8	38.5	75.3	156	317	674	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	6.05	13.5	23.9	43.0	85.8	175	343	690	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	3.42	9.80	18.4	32.1	60.4	120	227	424	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.06	9.18	17.2	29.2	52.9	98.3	170	272	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	4.87	11.2	20.1	35.0	62.4	106	169	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.81	8.33	15.6	25.6	41.3	65.0	94.5	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.97	3.63	8.88	16.0	26.2	40.9	59.3	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	4.65	9.76	16.4	23.8	31.6	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	1.88	4.32	8.14	13.3	18.6	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.96	4.89	7.76	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	2.18	3.60	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.0537A P:6.135W PF:0.5183 Lamp Flux:405.751x1 lm		
NAME: 8.01.020.0004 20°LWW-OP-D80-L6-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202404000031
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.61	1.00	1.00	0.86	0.56	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	1.43	2.00	1.98	1.65	0.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	6.69	7.95	7.82	7.13	5.74	4.27	3.13	1.95	0.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	12.7	13.8	13.6	12.2	9.99	8.01	5.80	3.45	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	21.6	24.4	24.5	22.8	19.2	15.3	11.5	8.09	4.93	2.39	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	31.9	35.3	35.2	32.1	26.8	20.9	15.7	11.4	7.60	4.05	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	71.5	84.6	86.7	75.8	58.6	41.3	27.9	18.7	12.4	7.57	3.24	0.49	0.00	0.00	0.00	0.00	0.00	0.00
-20	118	136	136	113	83.0	55.6	35.8	23.0	15.1	9.27	4.26	0.31	0.00	0.00	0.00	0.00	0.00	0.00
-15	315	436	439	319	196	116	65.1	36.6	21.8	13.4	7.20	2.23	0.00	0.00	0.00	0.00	0.00	0.00
-10	569	760	708	468	271	151	80.0	42.6	24.5	14.8	7.97	2.48	0.00	0.00	0.00	0.00	0.00	0.00
-5	1049	1533	1516	999	490	239	122	59.7	31.8	18.5	10.3	4.08	0.06	0.00	0.00	0.00	0.00	0.00
0	1763	2395	2172	1292	567	268	131	61.6	32.2	18.4	9.88	3.56	0.00	0.00	0.00	0.00	0.00	0.00
5	1357	1973	1957	1300	630	300	151	71.9	36.8	20.8	11.5	4.75	0.13	0.00	0.00	0.00	0.00	0.00
10	1252	1663	1554	999	504	255	130	62.9	33.1	18.9	10.2	3.67	0.00	0.00	0.00	0.00	0.00	0.00
15	748	1036	1040	745	419	226	120	60.8	32.6	18.8	10.3	3.91	0.08	0.00	0.00	0.00	0.00	0.00
20	385	461	445	347	233	143	80.6	43.8	25.1	14.7	7.53	2.03	0.00	0.00	0.00	0.00	0.00	0.00
25	239	294	297	246	175	114	67.6	38.7	23.0	13.7	6.96	1.87	0.00	0.00	0.00	0.00	0.00	0.00
30	121	136	135	117	90.2	62.6	40.3	25.8	16.5	9.64	4.10	0.19	0.00	0.00	0.00	0.00	0.00	0.00
35	76.6	88.1	89.7	80.3	64.4	47.1	32.0	21.0	13.3	7.55	2.94	0.37	0.00	0.00	0.00	0.00	0.00	0.00
40	38.5	42.7	42.2	38.0	31.7	24.8	18.7	12.7	7.48	3.47	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	23.6	26.9	27.5	25.2	21.7	17.1	12.8	8.64	4.75	2.10	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	10.3	11.8	11.9	11.3	9.88	7.67	5.27	2.93	0.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	4.91	5.83	6.00	5.70	5.12	4.08	2.86	1.70	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30.5DEG
Operators:QC1
Test Date:2024-04-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:70%
Test Distance:8.300m [K=1.0000]
Remarks: